


Schema **sepa.hr.pain.008.001.02.xsd**

schema location: [sepa.hr.pain.008.001.02.xsd](#)
attributeFormDefault:
elementFormDefault: **qualified**
targetNamespace: **urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02**


Elements	Complex types	Simple types
Document	AccountIdentification4Choice 2 AccountIdentification4Choice 3 AccountIdentification4Choice HR ActiveOrHistoricCurrencyAndAmount HRK AmendmentInformationDetails6 BranchAndFinancialInstitutionIdentification4 1 BranchAndFinancialInstitutionIdentification4 2 CashAccount16 2 CashAccount16 3 CashAccount16 HR CategoryPurpose1Choice CreditorReferenceInformation2 CreditorReferenceType1Choice CreditorReferenceType2 CustomerDirectDebitInitiationV02 DateAndPlaceOfBirth DirectDebitTransaction6 DirectDebitTransactionInformation9 Document FinancialIdentificationSchemeName1Choice FinancialInstitutionIdentification7 1 FinancialInstitutionIdentification7 2 GenericAccountIdentification1 GenericFinancialIdentification1 1 GenericFinancialIdentification1 2 GenericOrganisationIdentification1 GenericPersonIdentification1 1 GenericPersonIdentification1 2 GroupHeader39 LocalInstrument2Choice MandateRelatedInformation6 OrganisationIdentification4 OrganisationIdentificationSchemeName1Choice Party6Choice 1 Party6Choice 2 PartyIdentification32 1 PartyIdentification32 2 PartyIdentification32 3	ActiveOrHistoricCurrencyAndAmount SimpleType ActiveOrHistoricCurrencyCode HRK AnyBICIdentifier BatchBookingIndicator BICIdentifier ChargeBearerType1Code CountryCode DecimalNumber DocumentType3Code ExternalAccountIdentification1Code ExternalCategoryPurpose1Code ExternalFinancialInstitutionIdentification1Code ExternalLocalInstrument1Code ExternalOrganisationIdentification1Code ExternalPersonIdentification1Code ExternalPurpose1Code ExternalServiceLevel1Code IBAN2007Identifier IBAN2007Identifier HR ISODate ISODateTime Max1025Text Max140Text Max15NumericText Max34Text Max35Text Max35Text CI Max35Text NP Max35Text SEPA Max70Text PaymentMethod2Code SequenceType1Code TrueFalseIndicator

[PartyIdentification32_4](#)
[PartyIdentification32_5](#)
[PartyIdentification32_6](#)
[PaymentIdentification1](#)
[PaymentInstructionInformation4](#)
[PaymentTypeInformation20](#)
[PersonIdentification5_1](#)
[PersonIdentification5_2](#)
[PersonIdentificationSchemeName1Choice_1](#)
[PersonIdentificationSchemeName1Choice_2](#)
[PostalAddress6](#)
[Purpose2Choice](#)
[RemittanceInformation5](#)
[ServiceLevel8Choice](#)
[StructuredRemittanceInformation7](#)

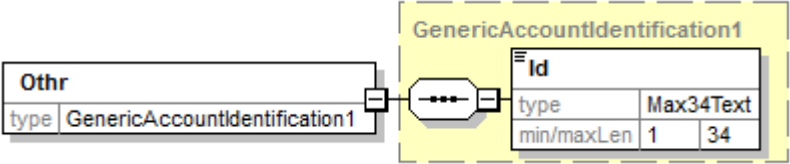
element **Document**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Document
properties	content complex
children	CstmrDrctDbtInitn
source	<code><xs:element name="Document" type="Document"/></code>


complexType **AccountIdentification4Choice_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Othr
used by	element CashAccount16_2/Id
source	<pre> <xs:complexType name="AccountIdentification4Choice_2"> <xs:sequence> <xs:element name="Othr" type="GenericAccountIdentification1"/> </xs:sequence> </xs:complexType> </pre>


element AccountIdentification4Choice_2/Othr

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	GenericAccountIdentification1
properties	content complex
children	Id
source	<xs:element name="Othr" type="GenericAccountIdentification1"/>

complexType AccountIdentification4Choice_3

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	IBAN
used by	element CashAccount16_3/Id
source	<pre><xs:complexType name="AccountIdentification4Choice_3"> <xs:sequence> <xs:element name="IBAN" type="IBAN2007Identifier"/> </xs:sequence> </xs:complexType></pre>

element AccountIdentification4Choice_3/IBAN

diagram							
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	IBAN2007Identifier						
properties	content simple						
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>pattern</td><td>[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}</td><td></td></tr></table>	Kind	Value	Annotation	pattern	[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}	
Kind	Value	Annotation					
pattern	[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}						
source	<xs:element name="IBAN" type="IBAN2007Identifier"/>						

complexType AccountIdentification4Choice_HR

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	IBAN
used by	element CashAccount16_HR/Id
source	<pre><xs:complexType name="AccountIdentification4Choice_HR"> <xs:sequence> <xs:element name="IBAN" type="IBAN2007Identifier_HR"/> </xs:sequence> </xs:complexType></pre>

element AccountIdentification4Choice_HR/IBAN

diagram	IBAN <table><tr><td>type</td><td>IBAN2007Identifier_HR</td></tr><tr><td>pattern</td><td>[H][R][0-9]{19}</td></tr></table>	type	IBAN2007Identifier_HR	pattern	[H][R][0-9]{19}		
type	IBAN2007Identifier_HR						
pattern	[H][R][0-9]{19}						
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	IBAN2007Identifier_HR						
properties	content simple						
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>pattern</td><td>[H][R][0-9]{19}</td><td></td></tr></table>	Kind	Value	Annotation	pattern	[H][R][0-9]{19}	
Kind	Value	Annotation					
pattern	[H][R][0-9]{19}						
source	<xs:element name="IBAN" type="IBAN2007Identifier_HR"/>						

complexType ActiveOrHistoricCurrencyAndAmount_HRK

diagram	<pre>graph LR A[ActiveOrHistoricCurrencyAndAmount_HRK] --- B[Ccy] subgraph B [Ccy] direction TB B1[type: ActiveOrHistoricCurrencyCode_HRK] B2[use: required] end</pre>		
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	extension of ActiveOrHistoricCurrencyAndAmount_SimpleType		
properties	base ActiveOrHistoricCurrencyAndAmount_SimpleType		
used by	element DirectDebitTransactionInformation9/InstdAmt		
facets	Kind	Value	Annotation
	minInclusive	0.01	
	maxInclusive	999999999.99	
	totalDigits	11	
	fractionDigits	2	
	whiteSpace	collapse	

attributes	Name Ccy	Type ActiveOrHistoricCurrencyCode_HRK	Use required	Default	Fixed	Annotation
source	<pre> <xs:complexType name="ActiveOrHistoricCurrencyAndAmount_HRK"> <xs:simpleContent> <xs:extension base="ActiveOrHistoricCurrencyAndAmount_SimpleType"> <xs:attribute name="Ccy" type="ActiveOrHistoricCurrencyCode_HRK" use="required"/> </xs:extension> </xs:simpleContent> </xs:complexType> </pre>					


attribute **ActiveOrHistoricCurrencyAndAmount_HRK/@Ccy**

type	ActiveOrHistoricCurrencyCode_HRK		
properties	use required		
facets	Kind enumeration	Value HRK	Annotation
	enumeration	EUR	
source	<xs:attribute name="Ccy" type="ActiveOrHistoricCurrencyCode_HRK" use="required"/>		

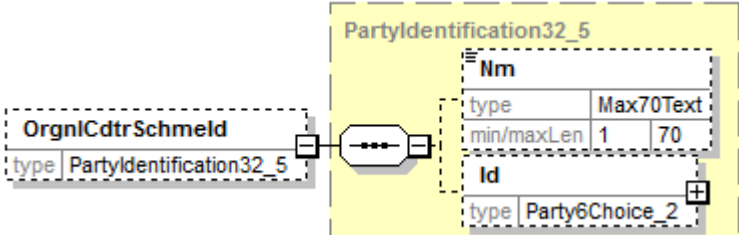
complexType **AmendmentInformationDetails6**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	OrgnlMndtId OrgnlCdtrSchmeld OrgnlDbtrAcct OrgnlDbtrAgt
used by	element MandateRelatedInformation6/AmdmntInfDtls
source	<pre><xs:complexType name="AmendmentInformationDetails6"> <xs:sequence> <xs:element name="OrgnlMndtId" type="Max35Text" minOccurs="0" maxOccurs="1"/> <xs:element name="OrgnlCdtrSchmeld" type="PartyIdentification32_5" minOccurs="0" maxOccurs="1"/> <xs:element name="OrgnlDbtrAcct" type="CashAccount16_2" minOccurs="0" maxOccurs="1"/> <xs:element name="OrgnlDbtrAgt" type="BranchAndFinancialInstitutionIdentification4_2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType></pre>


element **AmendmentInformationDetails6/OrgnlMndtId**

diagram	 The diagram shows a dashed box labeled 'OrgnlMndtId'. Inside, there is a table with two rows: 'type' with value 'Max35Text' and 'min/maxLen' with values '1' and '35'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max35Text
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
source	<code><xs:element name="OrgnlMndtId" type="Max35Text" minOccurs="0" maxOccurs="1"/></code>

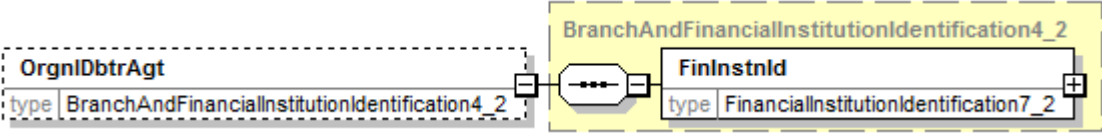
element **AmendmentInformationDetails6/OrgnlCdtrSchmeld**

diagram	 The diagram shows a dashed box labeled 'OrgnlCdtrSchmeld' with type 'PartyIdentification32_5'. It is connected by a line with a circle and dots to a larger dashed box labeled 'PartyIdentification32_5'. Inside this larger box, there is a table with two rows: 'Nm' with type 'Max70Text' and 'min/maxLen' '1' '70', and 'Id' with type 'Party6Choice_2'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_5
properties	minOcc 0 maxOcc 1 content complex
children	Nm Id
source	<code><xs:element name="OrgnlCdtrSchmeld" type="PartyIdentification32_5" minOccurs="0" maxOccurs="1"/></code>


element **AmendmentInformationDetails6/OrgnlDbtrAcct**

diagram	 The diagram shows a dashed box labeled 'OrgnlDbtrAcct' with type 'CashAccount16_2'. It is connected by a line with a circle and dots to a larger dashed box labeled 'CashAccount16_2'. Inside this larger box, there is a table with one row: 'Id' with type 'AccountIdentification4Choice_2'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	CashAccount16_2
properties	minOcc 0 maxOcc 1 content complex
children	Id
source	<code><xs:element name="OrgnlDbtrAcct" type="CashAccount16_2" minOccurs="0" maxOccurs="1"/></code>

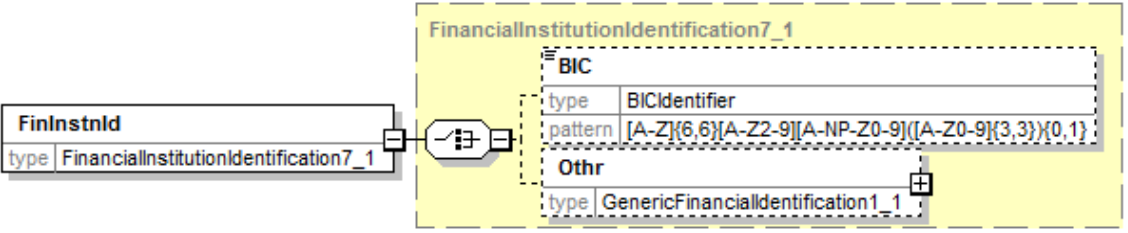
element AmendmentInformationDetails6/OrgnIDbtrAgt

diagram	 The diagram shows the structure of the OrgnIDbtrAgt element. It is a dashed box containing a solid box labeled OrgnIDbtrAgt with type BranchAndFinancialInstitutionIdentification4_2. This box is connected via a sequence connector (a circle with three dots) to another solid box labeled FinInstnId with type FinancialInstitutionIdentification7_2. The FinInstnId box has a plus sign in a square at its end, indicating it is a required element.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	BranchAndFinancialInstitutionIdentification4_2
properties	minOcc 0 maxOcc 1 content complex
children	FinInstnId
source	<pre><xs:element name="OrgnIDbtrAgt" type="BranchAndFinancialInstitutionIdentification4_2" minOccurs="0" maxOccurs="1"/></pre>

complexType BranchAndFinancialInstitutionIdentification4_1

diagram	 The diagram shows the structure of the BranchAndFinancialInstitutionIdentification4_1 complex type. It is a solid box containing a sequence connector (a circle with three dots) followed by a solid box labeled FinInstnId with type FinancialInstitutionIdentification7_1. The FinInstnId box has a plus sign in a square at its end, indicating it is a required element.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	FinInstnId
used by	elements PaymentInstructionInformation4/CdtrAgt DirectDebitTransactionInformation9/DbtrAgt
source	<pre><xs:complexType name="BranchAndFinancialInstitutionIdentification4_1"> <xs:sequence> <xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_1"/> </xs:sequence> </xs:complexType></pre>


element BranchAndFinancialInstitutionIdentification4_1/FinInstnId

diagram	 The diagram shows the structure of the BranchAndFinancialInstitutionIdentification4_1/FinInstnId element. It is a solid box labeled FinInstnId with type FinancialInstitutionIdentification7_1. This box is connected via a sequence connector (a circle with three dots) to a dashed box labeled FinancialInstitutionIdentification7_1. Inside this dashed box, there is a solid box labeled BIC with type BICIdentifier and pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}. Below the BIC box is another solid box labeled Othr with type GenericFinancialIdentification1_1. The Othr box has a plus sign in a square at its end, indicating it is a required element.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	FinancialInstitutionIdentification7_1
properties	content complex
children	BIC Othr
source	<pre><xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_1"/></pre>


complexType BranchAndFinancialInstitutionIdentification4_2

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	FinInstnId
used by	element AmendmentInformationDetails6/OrgnIDbtrAgt
source	<pre> <xs:complexType name="BranchAndFinancialInstitutionIdentification4_2"> <xs:sequence> <xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_2"/> </xs:sequence> </xs:complexType> </pre>

element BranchAndFinancialInstitutionIdentification4_2/FinInstnId

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	FinancialInstitutionIdentification7_2
properties	content complex
children	Othr
source	<pre> <xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_2"/> </pre>

complexType CashAccount16_2

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id
used by	element AmendmentInformationDetails6/OrgnIDbtrAcct
source	<pre> <xs:complexType name="CashAccount16_2"> <xs:sequence> <xs:element name="Id" type="AccountIdentification4Choice_2"/> </xs:sequence> </xs:complexType> </pre>

element **CashAccount16_2/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	AccountIdentification4Choice_2
properties	content complex
children	Othr
source	<code><xs:element name="Id" type="AccountIdentification4Choice_2"/></code>

complexType **CashAccount16_3**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id
used by	element DirectDebitTransactionInformation9/DbtrAcct
source	<pre> <xs:complexType name="CashAccount16_3"> <xs:sequence> <xs:element name="Id" type="AccountIdentification4Choice_3"/> </xs:sequence> </xs:complexType> </pre>

element **CashAccount16_3/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	AccountIdentification4Choice_3
properties	content complex
children	IBAN
source	<code><xs:element name="Id" type="AccountIdentification4Choice_3"/></code>

complexType **CashAccount16_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id Ccy
used by	element PaymentInstructionInformation4/CdtrAcct
source	<pre> <xs:complexType name="CashAccount16_HR"> <xs:sequence> <xs:element name="Id" type="AccountIdentification4Choice_HR"/> <xs:element name="Ccy" type="ActiveOrHistoricCurrencyCode_HRK" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>


element **CashAccount16_HR/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	AccountIdentification4Choice_HR
properties	content complex
children	IBAN
source	<pre> <xs:element name="Id" type="AccountIdentification4Choice_HR"/> </pre>


element **CashAccount16_HR/Ccy**

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	ActiveOrHistoricCurrencyCode_HRK									
properties	<table><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>1</td></tr><tr><td>content</td><td>simple</td></tr></table>	minOcc	0	maxOcc	1	content	simple			
minOcc	0									
maxOcc	1									
content	simple									
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>enumeration</td><td>HRK</td><td></td></tr><tr><td>enumeration</td><td>EUR</td><td></td></tr></table>	Kind	Value	Annotation	enumeration	HRK		enumeration	EUR	
Kind	Value	Annotation								
enumeration	HRK									
enumeration	EUR									
source	<xs:element name="Ccy" type="ActiveOrHistoricCurrencyCode_HRK" minOccurs="0" maxOccurs="1"/>									

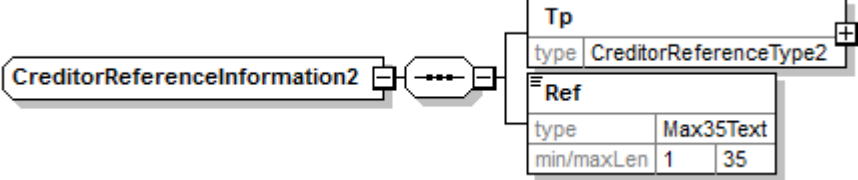
complexType CategoryPurpose1Choice

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Cd
used by	element PaymentTypeInfoInformation20/CtgyPurp
source	<pre> <xs:complexType name="CategoryPurpose1Choice"> <xs:sequence> <xs:element name="Cd" type="ExternalCategoryPurpose1Code"/> </xs:sequence> </xs:complexType> </pre>

element CategoryPurpose1Choice/Cd

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	ExternalCategoryPurpose1Code									
properties	content simple									
facets	<table><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>4</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	4	
Kind	Value	Annotation								
minLength	1									
maxLength	4									
source	<xs:element name="Cd" type="ExternalCategoryPurpose1Code"/>									

complexType CreditorReferenceInformation2

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Tp Ref
used by	element StructuredRemittanceInformation7/CdtrRefInf
source	<pre> <xs:complexType name="CreditorReferenceInformation2"> <xs:sequence> <xs:element name="Tp" type="CreditorReferenceType2" minOccurs="1" maxOccurs="1"/> <xs:element name="Ref" type="Max35Text" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>

	<pre></xs:sequence> </xs:complexType></pre>
--	---

element **CreditorReferenceInformation2/Tp**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	CreditorReferenceType2
properties	content complex
children	CdOrPrtry Issr
source	<pre><xs:element name="Tp" type="CreditorReferenceType2" minOccurs="1" maxOccurs="1"/></pre>

element **CreditorReferenceInformation2/Ref**


diagram	Ref <table><tr><td>type</td><td colspan="3">Max35Text</td></tr><tr><td>min/maxLen</td><td>1</td><td colspan="2">35</td></tr></table>	type	Max35Text			min/maxLen	1	35		
type	Max35Text									
min/maxLen	1	35								
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Ref" type="Max35Text" minOccurs="1" maxOccurs="1"/>									

complexType **CreditorReferenceType1Choice**

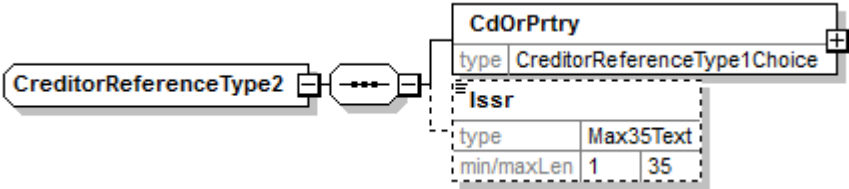
diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Cd
used by	element CreditorReferenceType2/CdOrPrtry
source	<pre><xs:complexType name="CreditorReferenceType1Choice"> <xs:sequence> <xs:element name="Cd" type="DocumentType3Code"/> </xs:sequence> </xs:complexType></pre>

	<pre></xs:sequence> </xs:complexType></pre>
--	---


element **CreditorReferenceType1Choice/Cd**

diagram							
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	DocumentType3Code						
properties	content simple						
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>enumeration</td><td>SCOR</td><td></td></tr></table>	Kind	Value	Annotation	enumeration	SCOR	
Kind	Value	Annotation					
enumeration	SCOR						
source	<xs:element name="Cd" type="DocumentType3Code"/>						

complexType **CreditorReferenceType2**


diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	CdOrPrtry Issr
used by	element CreditorReferenceInformation2/Tp
source	<pre><xs:complexType name="CreditorReferenceType2"> <xs:sequence> <xs:element name="CdOrPrtry" type="CreditorReferenceType1Choice"/> <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType></pre>

element **CreditorReferenceType2/CdOrPrtry**

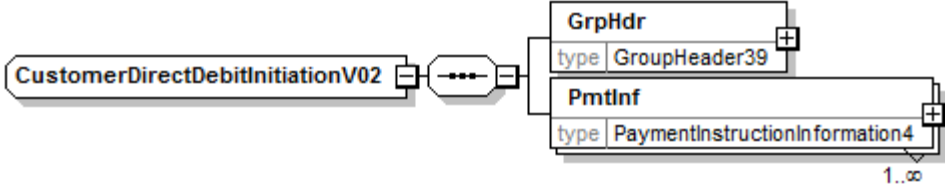
diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	CreditorReferenceType1Choice
properties	content complex
children	Cd

source	<code><xs:element name="CdOrPrtry" type="CreditorReferenceType1Choice"/></code>
--------	---

element **CreditorReferenceType2/Issr**

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	<table><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>1</td></tr><tr><td>content</td><td>simple</td></tr></table>	minOcc	0	maxOcc	1	content	simple			
minOcc	0									
maxOcc	1									
content	simple									
facets	<table><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>									

complexType **CustomerDirectDebitInitiationV02**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	GrpHdr PmtInf
used by	element Document/CstmrDrctDbtInitn
source	<pre> <xs:complexType name="CustomerDirectDebitInitiationV02"> <xs:sequence> <xs:element name="GrpHdr" type="GroupHeader39"/> <xs:element name="PmtInf" type="PaymentInstructionInformation4" minOccurs="1" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre>

element **CustomerDirectDebitInitiationV02/GrpHdr**

diagram	The diagram illustrates the structure of the GrpHdr element. It is a complex type that contains a GroupHeader39 element. The GroupHeader39 element is a complex type containing several child elements: MsgId: type Max35Text, min/maxLen 1 35 CreDtTm: type ISODatetime NbOfTxS: type Max15NumericText, pattern [0-9]{1,15} CtrlSum: type DecimalNumber, min/maxIncl 0.01 9999999999999999.99 InitgPty: type PartyIdentification32_1
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	GroupHeader39
properties	content complex
children	MsgId CreDtTm NbOfTxS CtrlSum InitgPty
source	<xs:element name="GrpHdr" type="GroupHeader39"/>

element **CustomerDirectDebitInitiationV02/PmtInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PaymentInstructionInformation4
properties	minOcc 1 maxOcc unbounded content complex
children	PmtInfId PmtMtd BtchBookg NbOfTxs CtrlSum PmtTpInf ReqdColltnDt Cdtr CdtrAcct CdtrAgt UltmtCdtr ChrgBr CdtrSchmd DrctDbtTxInf
source	<pre><xs:element name="PmtInf" type="PaymentInstructionInformation4" minOccurs="1" maxOccurs="unbounded"/></pre>

complexType DateAndPlaceOfBirth

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	BirthDt PrvcOfBirth CityOfBirth CtryOfBirth
used by	element PersonIdentification5 1/DtAndPlcOfBirth
source	<pre> <xs:complexType name="DateAndPlaceOfBirth"> <xs:sequence> <xs:element name="BirthDt" type="ISODate"/> <xs:element name="PrvcOfBirth" type="Max35Text" minOccurs="0" maxOccurs="1"/> <xs:element name="CityOfBirth" type="Max35Text"/> <xs:element name="CtryOfBirth" type="CountryCode"/> </xs:sequence> </xs:complexType> </pre>

element DateAndPlaceOfBirth/BirthDt


diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	ISODate
properties	content simple
source	<pre> <xs:element name="BirthDt" type="ISODate"/> </pre>

element DateAndPlaceOfBirth/PrvcOfBirth


diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max35Text
properties	minOcc 0 maxOcc 1 content simple

facets	Kind	Value	Annotation
	minLength	1	
	maxLength	35	
source	<xs:element name="PrvcOfBirth" type="Max35Text" minOccurs="0" maxOccurs="1"/>		


element DateAndPlaceOfBirth/CityOfBirth

diagram			
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	Max35Text		
properties	content	simple	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	35	
source	<xs:element name="CityOfBirth" type="Max35Text"/>		

element DateAndPlaceOfBirth/CtryOfBirth

diagram			
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	CountryCode		
properties	content	simple	
facets	Kind	Value	Annotation
	pattern	[A-Z]{2,2}	
source	<xs:element name="CtryOfBirth" type="CountryCode"/>		

complexType DirectDebitTransaction6

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	MndtRltdInf CdtrSchmeld
used by	element DirectDebitTransactionInformation9/DrctDbtTx
source	<xs:complexType name="DirectDebitTransaction6"> <xs:sequence>

	<pre> <xs:element name="MndtRltdInf" type="MandateRelatedInformation6" minOccurs="1" maxOccurs="1"/> <xs:element name="CdtrSchmeld" type="PartyIdentification32_4" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>
--	--

element **DirectDebitTransaction6/MndtRltdInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	MandateRelatedInformation6
properties	content complex
children	MndtId DtOfSgntr AmdmntInd AmdmntInfDtls ElectncSgntr
source	<pre> <xs:element name="MndtRltdInf" type="MandateRelatedInformation6" minOccurs="1" maxOccurs="1"/> </pre>

element **DirectDebitTransaction6/CdtrSchmeld**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_4
properties	minOcc 0 maxOcc 1 content complex
children	Id
source	<pre> <xs:element name="CdtrSchmeld" type="PartyIdentification32_4" minOccurs="0" maxOccurs="1"/> </pre>

complexType **DirectDebitTransactionInformation9**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	PmtId InstdAmt ChrgBr DrctDbtTx UltmtCdtr DbtrAgt Dbtr DbtrAcct UltmtDbtr Purp RmtInf
used by	element PaymentInstructionInformation4/DrctDbtTxInf
source	<pre> <xs:complexType name="DirectDebitTransactionInformation9"> <xs:sequence> <xs:element name="PmtId" type="PaymentIdentification1"/> <xs:element name="InstdAmt" type="ActiveOrHistoricCurrencyAndAmount_HRK"/> <xs:element name="ChrgBr" type="ChargeBearerType1Code" minOccurs="0" maxOccurs="1"/> <xs:element name="DrctDbtTx" type="DirectDebitTransaction6" minOccurs="1" maxOccurs="1"/> <xs:element name="UltmtCdtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/> <xs:element name="DbtrAgt" type="BranchAndFinancialInstitutionIdentification4_1"/> <xs:element name="Dbtr" type="PartyIdentification32_6"/> <xs:element name="DbtrAcct" type="CashAccount16_3"/> <xs:element name="UltmtDbtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/> <xs:element name="Purp" type="Purpose2Choice" minOccurs="0" maxOccurs="1"/> <xs:element name="RmtInf" type="RemittanceInformation5" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>

element **DirectDebitTransactionInformation9/PmtId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PaymentIdentification1
properties	content complex
children	InstrId EndToEndId
source	<xs:element name="PmtId" type="PaymentIdentification1"/>

element **DirectDebitTransactionInformation9/InstdAmt**

diagram	InstdAmt type ActiveOrHistoricCurrencyAndAmount_HRK min/maxIncl 0.01 999999999.99 ActiveOrHistoricCurrencyAndAmount_HRK attributes Ccy type ActiveOrHistoricCurrencyCode_HRK use required																		
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02																		
type	ActiveOrHistoricCurrencyAndAmount_HRK																		
properties	content complex																		
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>minInclusive</td><td>0.01</td><td></td></tr><tr><td>maxInclusive</td><td>999999999.99</td><td></td></tr><tr><td>totalDigits</td><td>11</td><td></td></tr><tr><td>fractionDigits</td><td>2</td><td></td></tr><tr><td>whiteSpace</td><td>collapse</td><td></td></tr></table>	Kind	Value	Annotation	minInclusive	0.01		maxInclusive	999999999.99		totalDigits	11		fractionDigits	2		whiteSpace	collapse	
Kind	Value	Annotation																	
minInclusive	0.01																		
maxInclusive	999999999.99																		
totalDigits	11																		
fractionDigits	2																		
whiteSpace	collapse																		
attributes	<table><tr><td>Name</td><td>Type</td><td>Use</td><td>Default</td><td>Fixed</td><td>Annotation</td></tr><tr><td>Ccy</td><td>ActiveOrHistoricCurrencyCode_HRK</td><td>required</td><td></td><td></td><td></td></tr></table>	Name	Type	Use	Default	Fixed	Annotation	Ccy	ActiveOrHistoricCurrencyCode_HRK	required									
Name	Type	Use	Default	Fixed	Annotation														
Ccy	ActiveOrHistoricCurrencyCode_HRK	required																	
source	<xs:element name="InstdAmt" type="ActiveOrHistoricCurrencyAndAmount_HRK"/>																		

element **DirectDebitTransactionInformation9/ChrgBr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	ChargeBearerType1Code

properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration SLEV
source	<code><xs:element name="ChrgBr" type="ChargeBearerType1Code" minOccurs="0" maxOccurs="1"/></code>

element DirectDebitTransactionInformation9/DrcDtTx

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	DirectDebitTransaction6
properties	content complex
children	MndtRltdInf CdtrSchmeld
source	<code><xs:element name="DrcDtTx" type="DirectDebitTransaction6" minOccurs="1" maxOccurs="1"/></code>

element DirectDebitTransactionInformation9/UltmtCdtr

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_3
properties	minOcc 0 maxOcc 1 content complex
children	Nm Id
source	<code><xs:element name="UltmtCdtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/></code>

element DirectDebitTransactionInformation9/DbtrAgt

diagram	
---------	--

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	BranchAndFinancialInstitutionIdentification4_1
properties	content complex
children	FinInstnId
source	<code><xs:element name="DbtrAgt" type="BranchAndFinancialInstitutionIdentification4_1"/></code>

element **DirectDebitTransactionInformation9/Dbtr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_6
properties	content complex
children	Nm PstlAdr Id
source	<code><xs:element name="Dbtr" type="PartyIdentification32_6"/></code>

element **DirectDebitTransactionInformation9/DbtrAcct**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	CashAccount16_3
properties	content complex
children	Id
source	<code><xs:element name="DbtrAcct" type="CashAccount16_3"/></code>

element **DirectDebitTransactionInformation9/UltmtDbtr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_3
properties	minOcc 0 maxOcc 1 content complex
children	Nm Id
source	<xs:element name="UltmtDbtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/>

element **DirectDebitTransactionInformation9/Purp**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Purpose2Choice
properties	minOcc 0 maxOcc 1 content complex
children	Cd
source	<xs:element name="Purp" type="Purpose2Choice" minOccurs="0" maxOccurs="1"/>

element **DirectDebitTransactionInformation9/RmtInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	RemittanceInformation5
properties	minOcc 0 maxOcc 1 content complex

children	Ustrd Strd
source	<pre><xs:element name="RmtInf" type="RemittanceInformation5" minOccurs="0" maxOccurs="1"/></pre>

complexType Document

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	CstmrDrctDbtInittn
used by	element Document
source	<pre><xs:complexType name="Document"> <xs:sequence> <xs:element name="CstmrDrctDbtInittn" type="CustomerDirectDebitInitiationV02"/> </xs:sequence> </xs:complexType></pre>

element Document/CstmrDrctDbtInittn

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	CustomerDirectDebitInitiationV02
properties	content complex
children	GrpHdr PmtInf
source	<pre><xs:element name="CstmrDrctDbtInittn" type="CustomerDirectDebitInitiationV02"/></pre>

complexType FinancialIdentificationSchemeName1Choice

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Cd Prtry
source	<pre><xs:complexType name="FinancialIdentificationSchemeName1Choice"></pre>

	<pre> <xs:sequence> <xs:choice> <xs:element name="Cd" type="ExternalFinancialInstitutionIdentification1Code"/> <xs:element name="Prtry" type="Max35Text"/> </xs:choice> </xs:sequence> </xs:complexType> </pre>
--	---

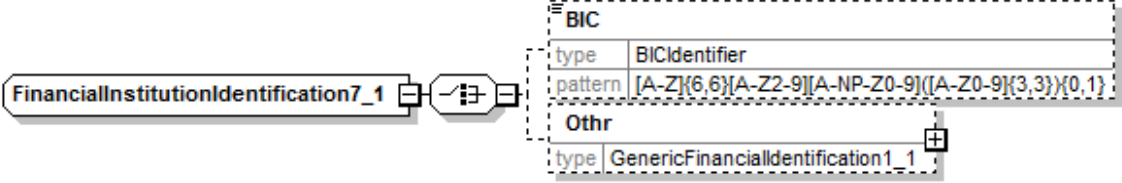
element **FinancialIdentificationSchemeName1Choice/Cd**

diagram	Cd type ExternalFinancialInstitutionIdentification1Code min/maxLen 14									
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	ExternalFinancialInstitutionIdentification1Code									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>4</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	4	
Kind	Value	Annotation								
minLength	1									
maxLength	4									
source	<xs:element name="Cd" type="ExternalFinancialInstitutionIdentification1Code"/>									

element **FinancialIdentificationSchemeName1Choice/Prtry**


diagram	Prtry <table><tr><td>type</td><td colspan="3">Max35Text</td></tr><tr><td>min/maxLen</td><td>1</td><td colspan="2">35</td></tr></table>	type	Max35Text			min/maxLen	1	35		
type	Max35Text									
min/maxLen	1	35								
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Prtry" type="Max35Text"/>									

complexType **FinancialInstitutionIdentification7_1**

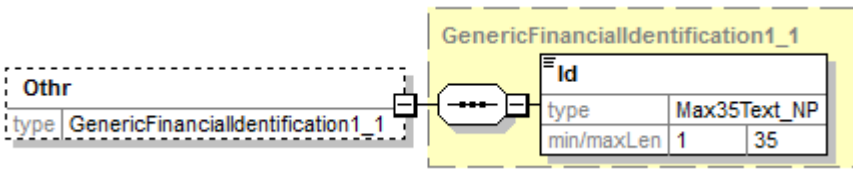
diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

children	BIC Othr
used by	element BranchAndFinancialInstitutionIdentification4_1/FinInstnId
source	<pre><xs:complexType name="FinancialInstitutionIdentification7_1"> <xs:choice> <xs:element name="BIC" type="BICIdentifier" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericFinancialIdentification1_1" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:complexType></pre>


element [FinancialInstitutionIdentification7_1/BIC](#)

diagram							
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	BICIdentifier						
properties	<table><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>1</td></tr><tr><td>content</td><td>simple</td></tr></table>	minOcc	0	maxOcc	1	content	simple
minOcc	0						
maxOcc	1						
content	simple						
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>pattern</td><td>[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}</td><td></td></tr></table>	Kind	Value	Annotation	pattern	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}	
Kind	Value	Annotation					
pattern	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}						
source	<xs:element name="BIC" type="BICIdentifier" minOccurs="0" maxOccurs="1"/>						

element [FinancialInstitutionIdentification7_1/Othr](#)

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	GenericFinancialIdentification1_1
properties	minOcc 0 maxOcc 1 content complex
children	Id
source	<pre><xs:element name="Othr" type="GenericFinancialIdentification1_1" minOccurs="0" maxOccurs="1"/></pre>

complexType [FinancialInstitutionIdentification7_2](#)

diagram	
---------	--

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Othr
used by	element BranchAndFinancialInstitutionIdentification4 2/FinInstnId
source	<pre> <xs:complexType name="FinancialInstitutionIdentification7_2"> <xs:sequence> <xs:element name="Othr" type="GenericFinancialIdentification1_2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>


element [FinancialInstitutionIdentification7_2/Othr](#)

diagram							
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	GenericFinancialIdentification1_2						
properties	<table> <tr><td>minOcc</td><td>0</td></tr> <tr><td>maxOcc</td><td>1</td></tr> <tr><td>content</td><td>complex</td></tr> </table>	minOcc	0	maxOcc	1	content	complex
minOcc	0						
maxOcc	1						
content	complex						
children	Id						
source	<pre> <xs:element name="Othr" type="GenericFinancialIdentification1_2" minOccurs="0" maxOccurs="1"/> </pre>						


complexType [GenericAccountIdentification1](#)

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id
used by	element AccountIdentification4Choice 2/Othr
source	<pre> <xs:complexType name="GenericAccountIdentification1"> <xs:sequence> <xs:element name="Id" type="Max34Text"/> </xs:sequence> </xs:complexType> </pre>

element **GenericAccountIdentification1/Id**

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max34Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>34</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	34	
Kind	Value	Annotation								
minLength	1									
maxLength	34									
source	<xs:element name="Id" type="Max34Text"/>									


complexType **GenericFinancialIdentification1_1**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id
used by	element FinancialInstitutionIdentification7_1/Othr
source	<pre> <xs:complexType name="GenericFinancialIdentification1_1"> <xs:sequence> <xs:element name="Id" type="Max35Text_NP"/> </xs:sequence> </xs:complexType> </pre>


element **GenericFinancialIdentification1_1/Id**

diagram	<table><tr><td colspan="2">Id</td></tr><tr><td>type</td><td>Max35Text_NP</td></tr><tr><td>min/maxLen</td><td>1 35</td></tr></table>	Id		type	Max35Text_NP	min/maxLen	1 35						
Id													
type	Max35Text_NP												
min/maxLen	1 35												
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02												
type	Max35Text_NP												
properties	content simple												
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr><tr><td>enumeration</td><td>NOTPROVIDED</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	35		enumeration	NOTPROVIDED	
Kind	Value	Annotation											
minLength	1												
maxLength	35												
enumeration	NOTPROVIDED												
source	<xs:element name="Id" type="Max35Text_NP"/>												

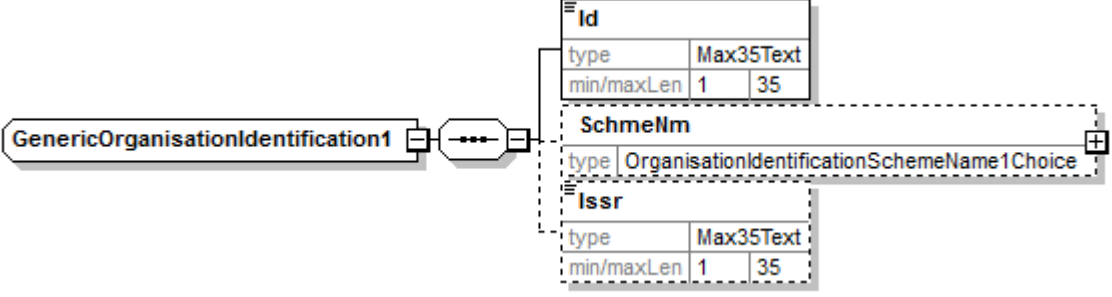
complexType GenericFinancialIdentification1_2

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id
used by	element FinancialInstitutionIdentification7_2/Othr
source	<pre><xs:complexType name="GenericFinancialIdentification1_2"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> </xs:sequence> </xs:complexType></pre>

element GenericFinancialIdentification1_2/Id


diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Id" type="Max35Text"/>									

complexType GenericOrganisationIdentification1

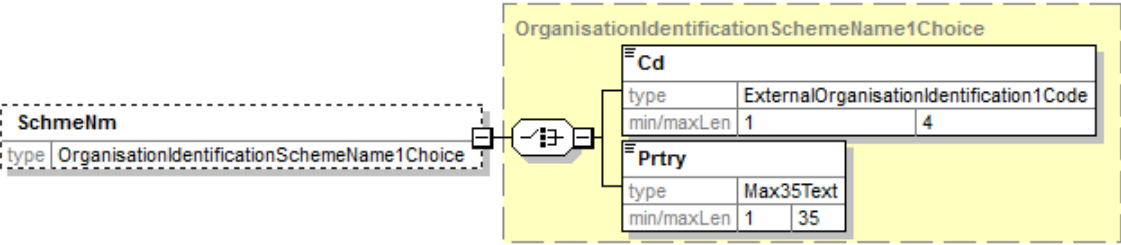
diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id SchmeNm Issr
used by	element OrganisationIdentification4/Othr
source	<pre><xs:complexType name="GenericOrganisationIdentification1"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> </xs:sequence> </xs:complexType></pre>

	<pre> <xs:element name="SchmeNm" type="OrganisationIdentificationSchemeName1Choice" minOccurs="0" maxOccurs="1"/> <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>
--	--


element **GenericOrganisationIdentification1/Id**

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Id" type="Max35Text"/>									

element **GenericOrganisationIdentification1/SchmeNm**

diagram							
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	OrganisationIdentificationSchemeName1Choice						
properties	<table> <tbody> <tr> <td>minOcc</td><td>0</td></tr> <tr> <td>maxOcc</td><td>1</td></tr> <tr> <td>content</td><td>complex</td></tr> </tbody> </table>	minOcc	0	maxOcc	1	content	complex
minOcc	0						
maxOcc	1						
content	complex						
children	Cd Prtry						
source	<pre> <xs:element name="SchmeNm" type="OrganisationIdentificationSchemeName1Choice" minOccurs="0" maxOccurs="1"/> </pre>						

element **GenericOrganisationIdentification1/Issr**


diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

type	Max35Text		
properties	minOcc	0	
	maxOcc	1	
	content	simple	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	35	
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>		

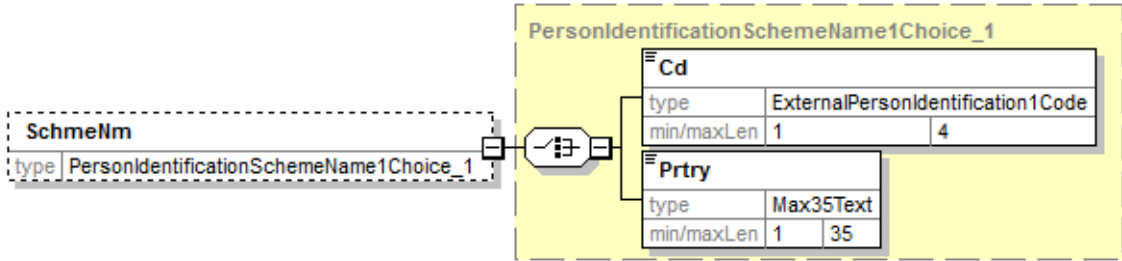
complexType **GenericPersonIdentification1_1**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id SchmeNm Issr
used by	element PersonIdentification5_1/Othr
source	<pre> <xs:complexType name="GenericPersonIdentification1_1"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> <xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_1" minOccurs="0" maxOccurs="1"/> <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>


element **GenericPersonIdentification1_1/Id**

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Id" type="Max35Text"/>									

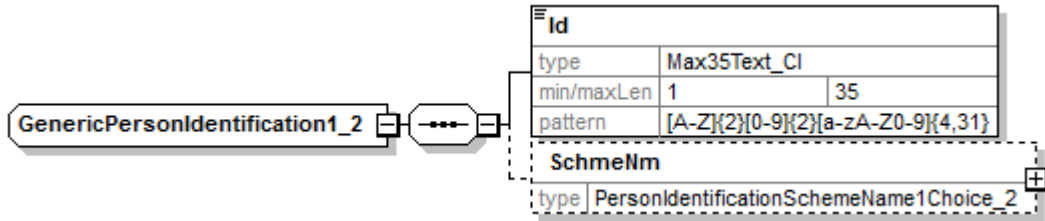
element GenericPersonIdentification1_1/SchmeNm

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PersonIdentificationSchemeName1Choice_1
properties	minOcc 0 maxOcc 1 content complex
children	Cd Prtry
source	<pre><xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_1" minOccurs="0" maxOccurs="1"/></pre>

element GenericPersonIdentification1_1/Issr


diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	<table><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>1</td></tr><tr><td>content</td><td>simple</td></tr></table>	minOcc	0	maxOcc	1	content	simple			
minOcc	0									
maxOcc	1									
content	simple									
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>									

complexType GenericPersonIdentification1_2

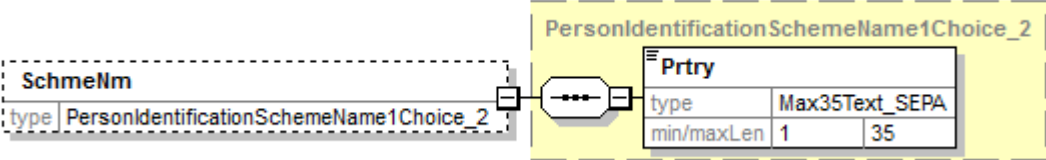
diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id SchmeNm

used by	element PersonIdentification5_2/Othr
source	<pre><xs:complexType name="GenericPersonIdentification1_2"> <xs:sequence> <xs:element name="Id" type="Max35Text_CI"/> <xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType></pre>

element **GenericPersonIdentification1_2/Id**

diagram													
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02												
type	Max35Text_CI												
properties	content simple												
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr><tr><td>pattern</td><td>[A-Z]{2}[0-9]{2}[a-zA-Z0-9]{4,31}</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35		pattern	[A-Z]{2}[0-9]{2}[a-zA-Z0-9]{4,31}	
Kind	Value	Annotation											
minLength	1												
maxLength	35												
pattern	[A-Z]{2}[0-9]{2}[a-zA-Z0-9]{4,31}												
source	<xs:element name="Id" type="Max35Text_CI"/>												

element **GenericPersonIdentification1_2/SchmeNm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PersonIdentificationSchemeName1Choice_2
properties	minOcc 0 maxOcc 1 content complex
children	Prtry
source	<pre><xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_2" minOccurs="0" maxOccurs="1"/></pre>


complexType GroupHeader39

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	MsgId CreDtTm NbOfTxS CtrlSum InitgPty
used by	element CustomerDirectDebitInitiationV02/GrpHdr
source	<pre> <xs:complexType name="GroupHeader39"> <xs:sequence> <xs:element name="MsgId" type="Max35Text"/> <xs:element name="CreDtTm" type="ISODatetime"/> <xs:element name="NbOfTxS" type="Max15NumericText"/> <xs:element name="CtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/> <xs:element name="InitgPty" type="PartyIdentification32_1"/> </xs:sequence> </xs:complexType> </pre>

element GroupHeader39/MsgId

diagram	MsgId type Max35Text min/maxLen 1 35									
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="MsgId" type="Max35Text"/>									

element GroupHeader39/CreDtTm

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	ISODatetime
properties	content simple
source	<code><xs:element name="CreDtTm" type="ISODatetime"/></code>

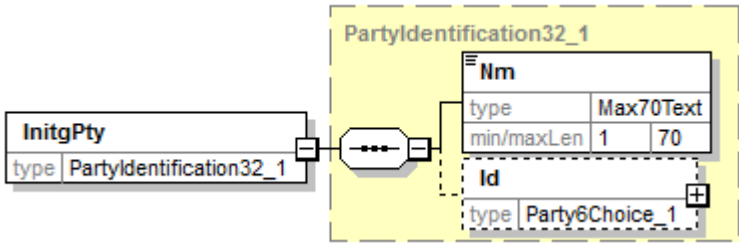
element GroupHeader39/NbOfTx

diagram	</
---------	--


element GroupHeader39/CtrlSum

diagram	CtrlSum type DecimalNumber min/maxIncl 0.01 9999999999999999.99
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	DecimalNumber
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 0.01 maxInclusive 9999999999999999.99 totalDigits 18 fractionDigits 2
source	<xs:element name="CtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>


element GroupHeader39/InitgPty

diagram	 The diagram shows the 'InitgPty' element connected to a dashed box labeled 'PartyIdentification32_1'. Inside this box, the 'Nm' element is shown with type 'Max70Text' and min/maxLen '1 70'. Below 'Nm' is the 'Id' element with type 'Party6Choice_1' and a '+' sign indicating a choice.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_1
properties	content complex
children	Nm Id
source	<code><xs:element name="InitgPty" type="PartyIdentification32_1"/></code>

complexType LocalInstrument2Choice

diagram	 The diagram shows the 'LocalInstrument2Choice' complex type connected to a box labeled 'Cd'. The 'Cd' box has type 'ExternalLocalInstrument1Code' and min/maxLen '1 35'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Cd
used by	element PaymentTypeInfo20/LclInstrm
source	<pre><xs:complexType name="LocalInstrument2Choice"> <xs:sequence> <xs:element name="Cd" type="ExternalLocalInstrument1Code"/> </xs:sequence> </xs:complexType></pre>

element LocalInstrument2Choice/Cd

diagram																
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02															
type	ExternalLocalInstrument1Code															
properties	content simple															
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr><tr><td>enumeration</td><td>CORE</td><td></td></tr><tr><td>enumeration</td><td>B2B</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	35		enumeration	CORE		enumeration	B2B	
Kind	Value	Annotation														
minLength	1															
maxLength	35															
enumeration	CORE															
enumeration	B2B															

source	<xs:element name="Cd" type="ExternalLocalInstrument1Code"/>
--------	---


complexType **MandateRelatedInformation6**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	MndtId DtOfSgntr AmdmntInd AmdmntInfDtls ElctrncSgntr
used by	element DirectDebitTransaction6/MndtRltdInf
source	<pre> <xs:complexType name="MandateRelatedInformation6"> <xs:sequence> <xs:element name="MndtId" type="Max35Text" minOccurs="1" maxOccurs="1"/> <xs:element name="DtOfSgntr" type="ISODate" minOccurs="1" maxOccurs="1"/> <xs:element name="AmdmntInd" type="TrueFalseIndicator" minOccurs="0" maxOccurs="1"/> <xs:element name="AmdmntInfDtls" type="AmendmentInformationDetails6" minOccurs="0" maxOccurs="1"/> <xs:element name="ElctrncSgntr" type="Max1025Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>


element **MandateRelatedInformation6/MndtId**

diagram	MndtId type Max35Text min/maxLen 1 35									
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="MndtId" type="Max35Text" minOccurs="1" maxOccurs="1"/>									

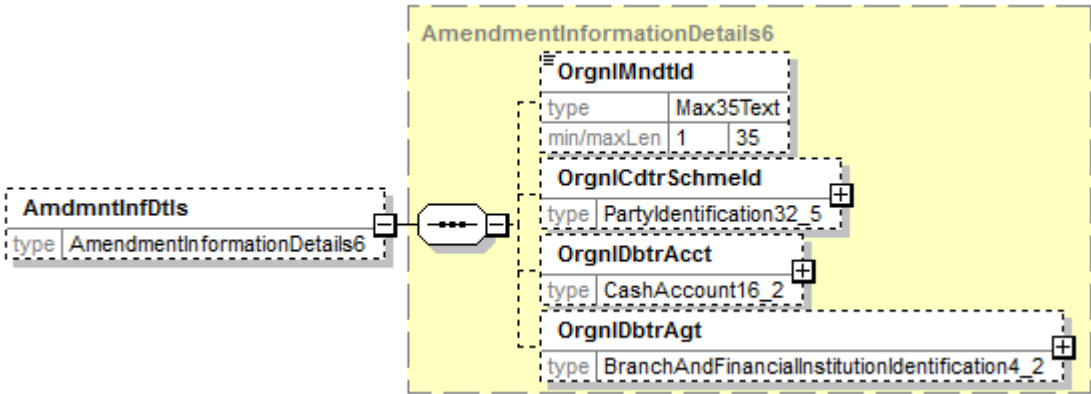
element MandateRelatedInformation6/DtOfSgntr

diagram	 A diagram showing a box labeled 'DtOfSgntr' with a sub-label 'type ISODate'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	ISODate
properties	content simple
source	<pre><xs:element name="DtOfSgntr" type="ISODate" minOccurs="1" maxOccurs="1"/></pre>


element MandateRelatedInformation6/AmdmntInd

diagram	 A diagram showing a box labeled 'AmdmntInd' with a sub-label 'type TrueFalseIndicator'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	TrueFalseIndicator
properties	minOcc 0 maxOcc 1 content simple
source	<pre><xs:element name="AmdmntInd" type="TrueFalseIndicator" minOccurs="0" maxOccurs="1"/></pre>

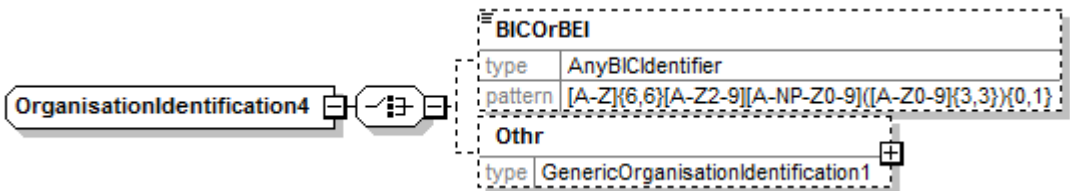
element MandateRelatedInformation6/AmdmntInfDtls

diagram	 A diagram showing a box labeled 'AmdmntInfDtls' with a sub-label 'type AmendmentInformationDetails6'. To the right, a larger box labeled 'AmendmentInformationDetails6' contains four sub-elements: 'OrgnlMndtId' (type Max35Text, min/maxLen 1 35), 'OrgnlCdtrSchmeld' (type PartyIdentification32_5), 'OrgnlDbtrAcct' (type CashAccount16_2), and 'OrgnlDbtrAgt' (type BranchAndFinancialInstitutionIdentification4_2). Each sub-element has a '+' sign next to it, indicating optional occurrence.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	AmendmentInformationDetails6
properties	minOcc 0 maxOcc 1 content complex
children	OrgnlMndtId OrgnlCdtrSchmeld OrgnlDbtrAcct OrgnlDbtrAgt
source	<pre><xs:element name="AmdmntInfDtls" type="AmendmentInformationDetails6" minOccurs="0" maxOccurs="1"/></pre>


element MandateRelatedInformation6/ElctrncSgntr

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max1025Text									
properties	<table><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>1</td></tr><tr><td>content</td><td>simple</td></tr></table>	minOcc	0	maxOcc	1	content	simple			
minOcc	0									
maxOcc	1									
content	simple									
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>1025</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	1025	
Kind	Value	Annotation								
minLength	1									
maxLength	1025									
source	<xs:element name="ElctrncSgntr" type="Max1025Text" minOccurs="0" maxOccurs="1"/>									

complexType OrganisationIdentification4

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	BICOrBEI Othr
used by	element Party6Choice 1/OrgId
source	<pre> <xs:complexType name="OrganisationIdentification4"> <xs:choice> <xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericOrganisationIdentification1" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:complexType> </pre>

element OrganisationIdentification4/BICOrBEI

diagram			
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	AnyBICIdentifier		
properties	minOcc	0	
	maxOcc	1	
	content	simple	
facets	Kind	Value	Annotation

	pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/>


element **OrganisationIdentification4/Othr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	GenericOrganisationIdentification1
properties	minOcc 0 maxOcc 1 content complex
children	Id SchmeNm Issr
source	<xs:element name="Othr" type="GenericOrganisationIdentification1" minOccurs="0" maxOccurs="1"/>


complexType **OrganisationIdentificationSchemeName1Choice**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Cd Prtry
used by	element GenericOrganisationIdentification1/SchmeNm
source	<xs:complexType name="OrganisationIdentificationSchemeName1Choice"> <xs:choice> <xs:element name="Cd" type="ExternalOrganisationIdentification1Code"/> <xs:element name="Prtry" type="Max35Text"/> </xs:choice> </xs:complexType>

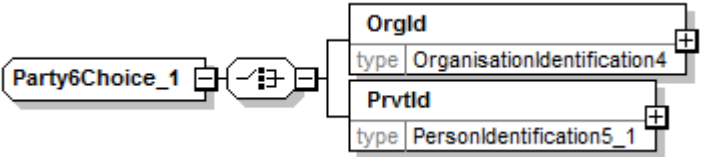
element **OrganisationIdentificationSchemeName1Choice/Cd**

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	ExternalOrganisationIdentification1Code									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>4</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	4	
Kind	Value	Annotation								
minLength	1									
maxLength	4									
source	<xs:element name="Cd" type="ExternalOrganisationIdentification1Code"/>									

element **OrganisationIdentificationSchemeName1Choice/Prtry**

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Prtry" type="Max35Text"/>									

complexType **Party6Choice_1**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	OrgId PrvtId
used by	elements PartyIdentification32_1/Id PartyIdentification32_3/Id PartyIdentification32_6/Id
source	<pre> <xs:complexType name="Party6Choice_1"> <xs:choice> <xs:element name="OrgId" type="OrganisationIdentification4"/> <xs:element name="PrvtId" type="PersonIdentification5_1"/> </xs:choice> </xs:complexType> </pre>

element **Party6Choice_1/OrgId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	OrganisationIdentification4
properties	content complex
children	BICOrBEI Othr
source	<xs:element name="OrgId" type="OrganisationIdentification4"/>


element **Party6Choice_1/PrvtId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PersonIdentification5_1
properties	content complex
children	DtAndPlcOfBirth Othr
source	<xs:element name="PrvtId" type="PersonIdentification5_1"/>

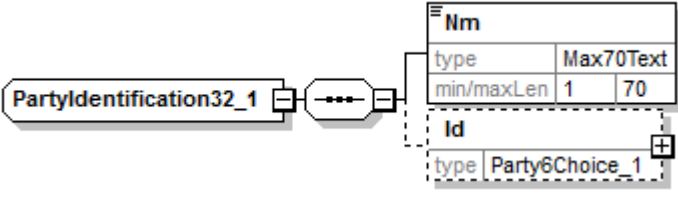
complexType **Party6Choice_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	PrvtId
used by	elements PartyIdentification32_4/Id PartyIdentification32_5/Id
source	<pre> <xs:complexType name="Party6Choice_2"> <xs:sequence> <xs:element name="PrvtId" type="PersonIdentification5_2"/> </xs:sequence> </xs:complexType> </pre>

element Party6Choice_2/PrvtId

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PersonIdentification5_2
properties	content complex
children	Othr
source	<code><xs:element name="PrvtId" type="PersonIdentification5_2"/></code>

complexType PartyIdentification32_1

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Nm Id
used by	element GroupHeader39/InitgPty
source	<pre><xs:complexType name="PartyIdentification32_1"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType></pre>

element PartyIdentification32_1/Nm

diagram	Nm type Max70Text min/maxLen 1 70									
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max70Text									
properties	content simple									
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>70</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	70	
Kind	Value	Annotation								
minLength	1									
maxLength	70									

source	<xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/>
--------	--

element PartyIdentification32_1/Id

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Party6Choice_1
properties	minOcc 0 maxOcc 1 content complex
children	OrgId PrvtId
source	<xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/>

complexType PartyIdentification32_2

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Nm PstlAdr
used by	element PaymentInstructionInformation4/Cdtr
source	<pre> <xs:complexType name="PartyIdentification32_2"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/> <xs:element name="PstlAdr" type="PostalAddress6" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>

element PartyIdentification32_2/Nm

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max70Text

properties	content	simple
facets	Kind	Value
	minLength	1
	maxLength	70
source	<xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/>	


element **PartyIdentification32_2/PstlAdr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PostalAddress6
properties	minOcc 0 maxOcc 1 content complex
children	Ctry AdrLine
source	<xs:element name="PstlAdr" type="PostalAddress6" minOccurs="0" maxOccurs="1"/>

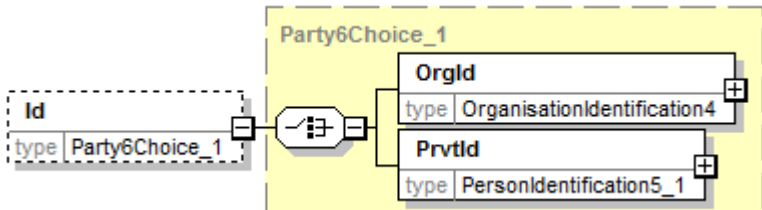
complexType **PartyIdentification32_3**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Nm Id
used by	elements DirectDebitTransactionInformation9/UlmtCdtr PaymentInstructionInformation4/UlmtCdtr DirectDebitTransactionInformation9/UlmtDbtr
source	<pre> <xs:complexType name="PartyIdentification32_3"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>


element **PartyIdentification32_3/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max70Text
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 70
source	<code><xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/></code>


element **PartyIdentification32_3/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Party6Choice_1
properties	minOcc 0 maxOcc 1 content complex
children	OrgId PrvtId
source	<code><xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/></code>

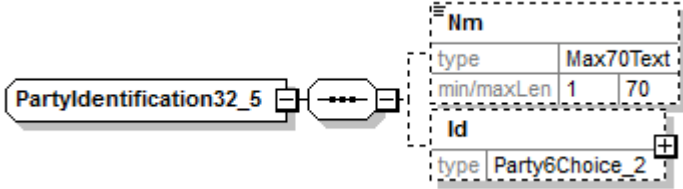
complexType **PartyIdentification32_4**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Id
used by	elements DirectDebitTransaction6/CdtrSchmeld PaymentInstructionInformation4/CdtrSchmeld
source	<pre><xs:complexType name="PartyIdentification32_4"> <xs:sequence> <xs:element name="Id" type="Party6Choice_2" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType></pre>


element PartyIdentification32_4/Id

diagram	 The diagram shows a container labeled 'Party6Choice_2' with a dashed border. Inside, there are two elements: 'Id' and 'PrvtId'. The 'Id' element has a type of 'Party6Choice_2' and a cardinality of 1. The 'PrvtId' element has a type of 'PersonIdentification5_2' and a cardinality of 1. They are connected by a dashed line with a plus sign at the end.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Party6Choice_2
properties	content complex
children	PrvtId
source	<pre><xs:element name="Id" type="Party6Choice_2" minOccurs="1" maxOccurs="1"/></pre>


complexType PartyIdentification32_5

diagram	 The diagram shows a container labeled 'PartyIdentification32_5' with a dashed border. Inside, there are two elements: 'Nm' and 'Id'. The 'Nm' element has a type of 'Max70Text' and a cardinality of 1. The 'Id' element has a type of 'Party6Choice_2' and a cardinality of 1. They are connected by a dashed line with a plus sign at the end.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Nm Id
used by	element AmendmentInformationDetails6/OrgnlCdtrSchmeld
source	<pre><xs:complexType name="PartyIdentification32_5"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType></pre>

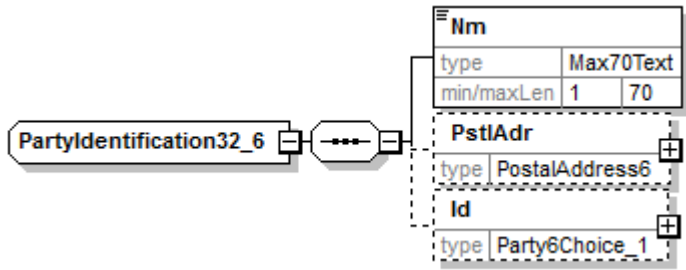
element PartyIdentification32_5/Nm

diagram	 The diagram shows a single element labeled 'Nm' with a dashed border. It has a type of 'Max70Text' and a cardinality of 1.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max70Text
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 70
source	<pre><xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/></pre>


element PartyIdentification32_5/Id

diagram	 The diagram shows a dashed box labeled 'Party6Choice_2' containing two elements: 'Id' (type Party6Choice_2) and 'PrvtId' (type PersonIdentification5_2). The 'Id' element is connected to the 'PrvtId' element via a dashed line with a plus sign at the end.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Party6Choice_2
properties	minOcc 0 maxOcc 1 content complex
children	PrvtId
source	<code><xs:element name="Id" type="Party6Choice_2" minOccurs="0" maxOccurs="1"/></code>

complexType PartyIdentification32_6

diagram	 The diagram shows a rounded rectangle labeled 'PartyIdentification32_6' connected to a sequence of three elements: 'Nm' (type Max70Text, min/maxLen 1/70), 'PstlAdr' (type PostalAddress6), and 'Id' (type Party6Choice_1). Each element in the sequence has a plus sign at the end, indicating a sequence.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Nm PstlAdr Id
used by	element DirectDebitTransactionInformation9/Dbtr
source	<pre><xs:complexType name="PartyIdentification32_6"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/> <xs:element name="PstlAdr" type="PostalAddress6" minOccurs="0" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType></pre>

element PartyIdentification32_6/Nm

diagram	 The diagram shows a rounded rectangle labeled 'Nm' with a table inside. The table has two columns: 'type' with value 'Max70Text' and 'min/maxLen' with values '1' and '70'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max70Text
properties	content simple

facets	Kind	Value	Annotation
	minLength	1	
	maxLength	70	
source	<xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/>		

element PartyIdentification32_6/PstlAdr

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PostalAddress6
properties	minOcc 0 maxOcc 1 content complex
children	Ctry AdrLine
source	<xs:element name="PstlAdr" type="PostalAddress6" minOccurs="0" maxOccurs="1"/>


element PartyIdentification32_6/Id

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Party6Choice_1
properties	minOcc 0 maxOcc 1 content complex
children	OrgId PrvtId
source	<xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/>

complexType PaymentIdentification1

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	InstrId EndToEndId
used by	element DirectDebitTransactionInformation9/PmtId
source	<pre> <xs:complexType name="PaymentIdentification1"> <xs:sequence> <xs:element name="InstrId" type="Max35Text" minOccurs="0" maxOccurs="1"/> <xs:element name="EndToEndId" type="Max35Text"/> </xs:sequence> </xs:complexType> </pre>

element PaymentIdentification1/InstrId

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max35Text
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
source	<xs:element name="InstrId" type="Max35Text" minOccurs="0" maxOccurs="1"/>

element PaymentIdentification1/EndToEndId

diagram	EndToEndId <table><tr><td>type</td><td>Max35Text</td></tr><tr><td>min/maxLen</td><td>135</td></tr></table>	type	Max35Text	min/maxLen	135					
type	Max35Text									
min/maxLen	135									
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									


source	<xs:element name="EndToEndId" type="Max35Text"/>
--------	--

complexType PaymentInstructionInformation4


diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	PmtInflId PmtMtd BtchBookg NbOfTxs CtrlSum PmtTplnf ReqdColltnDt Cdtr CdtrAcct CdtrAgt UltmtCdtr ChrgBr CdtrSchmeld DrctDbtTxInf
used by	element CustomerDirectDebitInitiationV02/PmtInfl
source	<pre> <xs:complexType name="PaymentInstructionInformation4"> <xs:sequence> <xs:element name="PmtInflId" type="Max35Text"/> <xs:element name="PmtMtd" type="PaymentMethod2Code"/> <xs:element name="BtchBookg" type="BatchBookingIndicator" minOccurs="0" maxOccurs="1"/> <xs:element name="NbOfTxs" type="Max15NumericText" minOccurs="0" maxOccurs="1"/> </pre>

	<pre> <xs:element name="CtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/> <xs:element name="PmtTplnf" type="PaymentTypeInformation20" minOccurs="1" maxOccurs="1"/> <xs:element name="ReqdColltnDt" type="ISODate"/> <xs:element name="Cdtr" type="PartyIdentification32_2"/> <xs:element name="CdtrAcct" type="CashAccount16_HR"/> <xs:element name="CdtrAgt" type="BranchAndFinancialInstitutionIdentification4_1"/> <xs:element name="UltmtCdtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/> <xs:element name="ChrgBr" type="ChargeBearerType1Code" minOccurs="0" maxOccurs="1"/> <xs:element name="CdtrSchmld" type="PartyIdentification32_4" minOccurs="0" maxOccurs="1"/> <xs:element name="DrctDbtTxInf" type="DirectDebitTransactionInformation9" minOccurs="1" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre>
--	--


element **PaymentInstructionInformation4/PmtInflId**

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="PmtInflId" type="Max35Text"/>									

element **PaymentInstructionInformation4/PmtMtd**


diagram							
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	PaymentMethod2Code						
properties	content simple						
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>enumeration</td><td>DD</td><td></td></tr></table>	Kind	Value	Annotation	enumeration	DD	
Kind	Value	Annotation					
enumeration	DD						
source	<xs:element name="PmtMtd" type="PaymentMethod2Code"/>						

element **PaymentInstructionInformation4/BtchBookg**


diagram	
---------	---

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	BatchBookingIndicator
properties	minOcc 0 maxOcc 1 content simple
source	<code><xs:element name="BtchBookg" type="BatchBookingIndicator" minOccurs="0" maxOccurs="1"/></code>

element **PaymentInstructionInformation4/NbOfTx**

diagram							
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	Max15NumericText						
properties	<table><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>1</td></tr><tr><td>content</td><td>simple</td></tr></table>	minOcc	0	maxOcc	1	content	simple
minOcc	0						
maxOcc	1						
content	simple						
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>pattern</td><td>[0-9]{1,15}</td><td></td></tr></table>	Kind	Value	Annotation	pattern	[0-9]{1,15}	
Kind	Value	Annotation					
pattern	[0-9]{1,15}						
source	<xs:element name="NbOfTx" type="Max15NumericText" minOccurs="0" maxOccurs="1"/>						

element **PaymentInstructionInformation4/CtrlSum**

diagram																
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02															
type	DecimalNumber															
properties	<table><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>1</td></tr><tr><td>content</td><td>simple</td></tr></table>	minOcc	0	maxOcc	1	content	simple									
minOcc	0															
maxOcc	1															
content	simple															
facets	<table><tr><td>Kind</td><td>Value</td><td>Annotation</td></tr><tr><td>minInclusive</td><td>0.01</td><td></td></tr><tr><td>maxInclusive</td><td>9999999999999999.99</td><td></td></tr><tr><td>totalDigits</td><td>18</td><td></td></tr><tr><td>fractionDigits</td><td>2</td><td></td></tr></table>	Kind	Value	Annotation	minInclusive	0.01		maxInclusive	9999999999999999.99		totalDigits	18		fractionDigits	2	
Kind	Value	Annotation														
minInclusive	0.01															
maxInclusive	9999999999999999.99															
totalDigits	18															
fractionDigits	2															
source	<xs:element name="CtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>															

element **PaymentInstructionInformation4/PmtTpInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PaymentTypeInformation20
properties	content complex
children	SvcLvl LclInstrm SeqTp CtgyPurp
source	<pre><xs:element name="PmtTpInf" type="PaymentTypeInformation20" minOccurs="1" maxOccurs="1"/></pre>

element **PaymentInstructionInformation4/ReqdColltnDt**

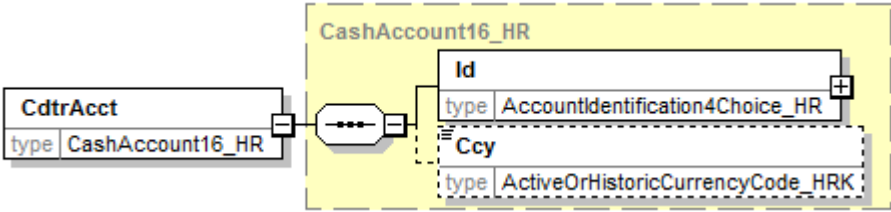
diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	ISODate
properties	content simple
source	<pre><xs:element name="ReqdColltnDt" type="ISODate"/></pre>

element **PaymentInstructionInformation4/Cdtr**

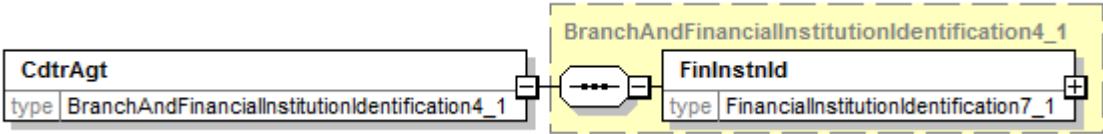
diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_2
properties	content complex
children	Nm PstlAdr

source	<xs:element name="Cdtr" type="PartyIdentification32_2"/>
--------	--

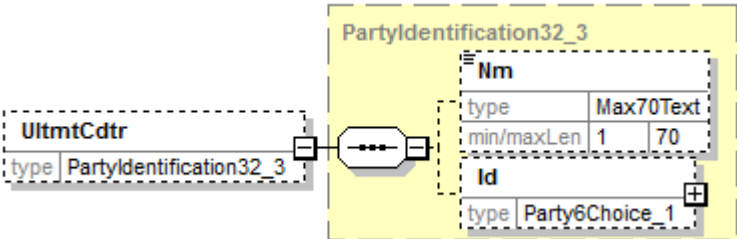
element **PaymentInstructionInformation4/CdtrAcct**

diagram	 The diagram shows the structure of the CdtrAcct element. It is a complex type of CashAccount16_HR. It contains a sequence of two elements: Id (type AccountIdentification4Choice_HR) and Ccy (type ActiveOrHistoricCurrencyCode_HRK). The Id element is required (indicated by a solid line and a '+' sign). The Ccy element is also required (indicated by a solid line and a '+' sign).
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	CashAccount16_HR
properties	content complex
children	Id Ccy
source	<xs:element name="CdtrAcct" type="CashAccount16_HR"/>

element **PaymentInstructionInformation4/CdtrAgt**


diagram	 The diagram shows the structure of the CdtrAgt element. It is a complex type of BranchAndFinancialInstitutionIdentification4_1. It contains a sequence of two elements: FinInstnId (type FinancialInstitutionIdentification7_1). The FinInstnId element is required (indicated by a solid line and a '+' sign).
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	BranchAndFinancialInstitutionIdentification4_1
properties	content complex
children	FinInstnId
source	<xs:element name="CdtrAgt" type="BranchAndFinancialInstitutionIdentification4_1"/>

element **PaymentInstructionInformation4/UltmtCdtr**


diagram	 The diagram shows the structure of the UltmtCdtr element. It is a complex type of PartyIdentification32_3. It contains a sequence of two elements: Nm (type Max70Text) and Id (type Party6Choice_1). The Nm element is required (indicated by a solid line and a '+' sign). The Id element is also required (indicated by a solid line and a '+' sign). The Nm element has a minimum length of 1 and a maximum length of 70.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_3
properties	minOcc 0 maxOcc 1 content complex

children	Nm Id
source	<code><xs:element name="UltmtCdtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/></code>

element **PaymentInstructionInformation4/ChrgBr**

diagram	 A diagram showing a dashed box labeled 'ChrgBr' with a sub-label 'type ChargeBearerType1Code'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	ChargeBearerType1Code
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration SLEV
source	<code><xs:element name="ChrgBr" type="ChargeBearerType1Code" minOccurs="0" maxOccurs="1"/></code>

element **PaymentInstructionInformation4/CdtrSchmeld**

diagram	 A diagram showing a dashed box labeled 'CdtrSchmeld' with a sub-label 'type PartyIdentification32_4'. This box is connected to a yellow box labeled 'PartyIdentification32_4' which contains an 'Id' element with a sub-label 'type Party6Choice_2'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	PartyIdentification32_4
properties	minOcc 0 maxOcc 1 content complex
children	Id
source	<code><xs:element name="CdtrSchmeld" type="PartyIdentification32_4" minOccurs="0" maxOccurs="1"/></code>

element **PaymentInstructionInformation4/DrctDbtTxInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	DirectDebitTransactionInformation9
properties	minOcc 1 maxOcc unbounded content complex
children	PmtId InstdAmt ChrgBr DrctDbtTx UltmtCdtr DbtrAgt Dbtr DbtrAcct UltmtDbtr Purp RmtInf
source	<xs:element name="DrctDbtTxInf" type="DirectDebitTransactionInformation9" minOccurs="1" maxOccurs="unbounded"/>

complexType **PaymentTypeInformation20**

diagram	
---------	--

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	SvcLvl LclInstrm SeqTp CtgyPurp
used by	element PaymentInstructionInformation4/PmtTplInf
source	<pre> <xs:complexType name="PaymentTypeInformation20"> <xs:sequence> <xs:element name="SvcLvl" type="ServiceLevel8Choice" minOccurs="1" maxOccurs="1"/> <xs:element name="LclInstrm" type="LocalInstrument2Choice" minOccurs="1" maxOccurs="1"/> <xs:element name="SeqTp" type="SequenceType1Code" minOccurs="1" maxOccurs="1"/> <xs:element name="CtgyPurp" type="CategoryPurpose1Choice" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>


element **PaymentTypeInformation20/SvcLvl**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	ServiceLevel8Choice
properties	content complex
children	Cd
source	<pre> <xs:element name="SvcLvl" type="ServiceLevel8Choice" minOccurs="1" maxOccurs="1"/> </pre>

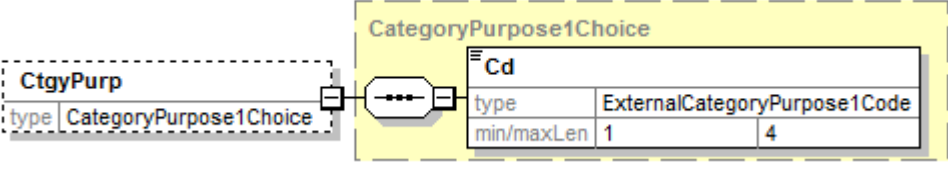
element **PaymentTypeInformation20/LclInstrm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	LocalInstrument2Choice
properties	content complex
children	Cd
source	<pre> <xs:element name="LclInstrm" type="LocalInstrument2Choice" minOccurs="1" maxOccurs="1"/> </pre>

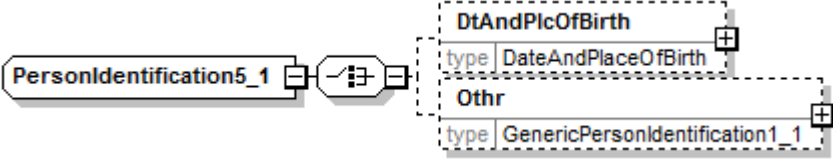
element **PaymentTypeInfoInformation20/SeqTp**

diagram																
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02															
type	SequenceType1Code															
properties	content simple															
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>enumeration</td><td>FRST</td><td></td></tr><tr><td>enumeration</td><td>RCUR</td><td></td></tr><tr><td>enumeration</td><td>FNAL</td><td></td></tr><tr><td>enumeration</td><td>OOFF</td><td></td></tr></tbody></table>	Kind	Value	Annotation	enumeration	FRST		enumeration	RCUR		enumeration	FNAL		enumeration	OOFF	
Kind	Value	Annotation														
enumeration	FRST															
enumeration	RCUR															
enumeration	FNAL															
enumeration	OOFF															
source	<xs:element name="SeqTp" type="SequenceType1Code" minOccurs="1" maxOccurs="1"/>															

element **PaymentTypeInfoInformation20/CtgyPurp**

diagram	 A diagram showing a dashed box labeled 'CtgyPurp' with a sub-label 'type' and the value 'CategoryPurpose1Choice'. This is connected to a solid box labeled 'CategoryPurpose1Choice' which contains a 'Cd' element with 'type' 'ExternalCategoryPurpose1Code' and 'min/maxLen' '1' '4'.						
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02						
type	CategoryPurpose1Choice						
properties	<table> <tbody> <tr> <td>minOcc</td> <td>0</td> </tr> <tr> <td>maxOcc</td> <td>1</td> </tr> <tr> <td>content</td> <td>complex</td> </tr> </tbody> </table>	minOcc	0	maxOcc	1	content	complex
minOcc	0						
maxOcc	1						
content	complex						
children	Cd						
source	<pre><xs:element name="CtgyPurp" type="CategoryPurpose1Choice" minOccurs="0" maxOccurs="1"/></pre>						

complexType **PersonIdentification5_1**

diagram	 A diagram showing a box labeled 'PersonIdentification5_1' connected to a choice box. The choice box contains two elements: 'DtAndPlcOfBirth' with 'type' 'DateAndPlaceOfBirth' and 'Othr' with 'type' 'GenericPersonIdentification1_1'.
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	DtAndPlcOfBirth Othr
used by	element Party6Choice 1/PrvtId
source	<pre><xs:complexType name="PersonIdentification5_1"> <xs:choice> <xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericPersonIdentification1_1" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:complexType></pre>

	<pre></xs:choice> </xs:complexType></pre>
--	---

element **PersonIdentification5_1/DtAndPlcOfBirth**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	DateAndPlaceOfBirth
properties	minOcc 0 maxOcc 1 content complex
children	BirthDt PrvcOfBirth CityOfBirth CtryOfBirth
source	<pre><xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/></pre>

element **PersonIdentification5_1/Othr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	GenericPersonIdentification1_1
properties	minOcc 0 maxOcc 1 content complex
children	Id SchmeNm Issr
source	<pre><xs:element name="Othr" type="GenericPersonIdentification1_1" minOccurs="0" maxOccurs="1"/></pre>

complexType PersonIdentification5_2

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Othr
used by	element Party6Choice_2/PrvtId
source	<pre> <xs:complexType name="PersonIdentification5_2"> <xs:sequence> <xs:element name="Othr" type="GenericPersonIdentification1_2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>

element PersonIdentification5_2/Othr

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	GenericPersonIdentification1_2
properties	minOcc 0 maxOcc 1 content complex
children	Id SchmeNm
source	<pre> <xs:element name="Othr" type="GenericPersonIdentification1_2" minOccurs="0" maxOccurs="1"/> </pre>

complexType PersonIdentificationSchemeName1Choice_1

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Cd Prtry

used by	element GenericPersonIdentification1_1/SchmeNm
source	<pre> <xs:complexType name="PersonIdentificationSchemeName1Choice_1"> <xs:choice> <xs:element name="Cd" type="ExternalPersonIdentification1Code"/> <xs:element name="Prtry" type="Max35Text"/> </xs:choice> </xs:complexType> </pre>


element **PersonIdentificationSchemeName1Choice_1/Cd**

diagram	Cd type ExternalPersonIdentification1Code min/maxLen 1 4									
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	ExternalPersonIdentification1Code									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>4</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	4	
Kind	Value	Annotation								
minLength	1									
maxLength	4									
source	<xs:element name="Cd" type="ExternalPersonIdentification1Code"/>									

element **PersonIdentificationSchemeName1Choice_1/Prtry**


diagram	Prtry <table><tr><td>type</td><td colspan="2">Max35Text</td></tr><tr><td>min/maxLen</td><td>1</td><td>35</td></tr></table>	type	Max35Text		min/maxLen	1	35			
type	Max35Text									
min/maxLen	1	35								
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max35Text									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	35	
Kind	Value	Annotation								
minLength	1									
maxLength	35									
source	<xs:element name="Prtry" type="Max35Text"/>									

complexType **PersonIdentificationSchemeName1Choice_2**

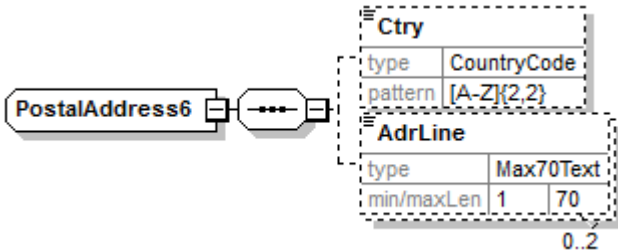
diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Prtry

used by	element GenericPersonIdentification1_2/SchmeNm
source	<pre><xs:complexType name="PersonIdentificationSchemeName1Choice_2"> <xs:sequence> <xs:element name="Prtry" type="Max35Text_SEPA"/> </xs:sequence> </xs:complexType></pre>


element **PersonIdentificationSchemeName1Choice_2/Prtry**

diagram													
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02												
type	Max35Text_SEPA												
properties	content simple												
facets	<table><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>35</td><td></td></tr><tr><td>enumeration</td><td>SEPA</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	35		enumeration	SEPA	
Kind	Value	Annotation											
minLength	1												
maxLength	35												
enumeration	SEPA												
source	<xs:element name="Prtry" type="Max35Text_SEPA"/>												


complexType **PostalAddress6**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Ctry AdrLine
used by	elements PartyIdentification32_2/PstlAdr PartyIdentification32_6/PstlAdr
source	<pre><xs:complexType name="PostalAddress6"> <xs:sequence> <xs:element name="Ctry" type="CountryCode" minOccurs="0" maxOccurs="1"/> <xs:element name="AdrLine" type="Max70Text" minOccurs="0" maxOccurs="2"/> </xs:sequence> </xs:complexType></pre>


element PostalAddress6/Ctry

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	CountryCode
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{2,2}
source	<code><xs:element name="Ctry" type="CountryCode" minOccurs="0" maxOccurs="1"/></code>


element PostalAddress6/AdrLine

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max70Text
properties	minOcc 0 maxOcc 2 content simple
facets	Kind Value Annotation minLength 1 maxLength 70
source	<code><xs:element name="AdrLine" type="Max70Text" minOccurs="0" maxOccurs="2"/></code>

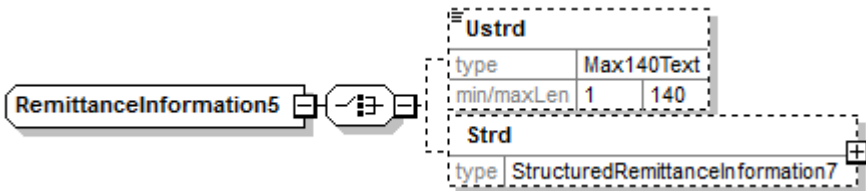
complexType Purpose2Choice

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Cd
used by	element DirectDebitTransactionInformation9/Purp
source	<code><xs:complexType name="Purpose2Choice"> <xs:sequence> <xs:element name="Cd" type="ExternalPurpose1Code"/> </xs:sequence> </xs:complexType></code>


element Purpose2Choice/Cd

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	ExternalPurpose1Code									
properties	content simple									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>4</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	4	
Kind	Value	Annotation								
minLength	1									
maxLength	4									
source	<xs:element name="Cd" type="ExternalPurpose1Code"/>									

complexType RemittanceInformation5

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Ustrd Strd
used by	element DirectDebitTransactionInformation9/RmtInf
source	<pre> <xs:complexType name="RemittanceInformation5"> <xs:choice> <xs:element name="Ustrd" type="Max140Text" minOccurs="0" maxOccurs="1"/> <xs:element name="Strd" type="StructuredRemittanceInformation7" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:complexType> </pre>

element RemittanceInformation5/Ustrd

diagram										
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	Max140Text									
properties	<table><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>1</td></tr><tr><td>content</td><td>simple</td></tr></table>	minOcc	0	maxOcc	1	content	simple			
minOcc	0									
maxOcc	1									
content	simple									
facets	<table><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>140</td><td></td></tr></table>	Kind	Value	Annotation	minLength	1		maxLength	140	
Kind	Value	Annotation								
minLength	1									
maxLength	140									

source	<code><xs:element name="Ustrd" type="Max140Text" minOccurs="0" maxOccurs="1"/></code>
--------	---

element **RemittanceInformation5/Strd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	StructuredRemittanceInformation7
properties	minOcc 0 maxOcc 1 content complex
children	CdtRefInf AddtlRmtInf
source	<code><xs:element name="Strd" type="StructuredRemittanceInformation7" minOccurs="0" maxOccurs="1"/></code>

complexType **ServiceLevel8Choice**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Cd
used by	element PaymentTypeInformation20/SvcLv
source	<pre> <xs:complexType name="ServiceLevel8Choice"> <xs:sequence> <xs:element name="Cd" type="ExternalServiceLevel1Code"/> </xs:sequence> </xs:complexType> </pre>

element **ServiceLevel8Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	ExternalServiceLevel1Code
properties	content simple

facets	Kind	Value	Annotation
	minLength	1	
	maxLength	4	
	enumeration	SEPA	
source	<xs:element name="Cd" type="ExternalServiceLevel1Code"/>		

complexType StructuredRemittanceInformation7

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	CdtrRefInf AddtlRmtInf
used by	element RemittanceInformation5/Strd
source	<pre> <xs:complexType name="StructuredRemittanceInformation7"> <xs:sequence> <xs:element name="CdtrRefInf" type="CreditorReferenceInformation2" minOccurs="0" maxOccurs="1"/> <xs:element name="AddtlRmtInf" type="Max140Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre>

element StructuredRemittanceInformation7/CdtrRefInf

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	CreditorReferenceInformation2
properties	minOcc 0 maxOcc 1 content complex
children	Tp Ref
source	<pre> <xs:element name="CdtrRefInf" type="CreditorReferenceInformation2" minOccurs="0" maxOccurs="1"/> </pre>

element **StructuredRemittanceInformation7/AddtlRmtInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Max140Text
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 140
source	<xs:element name="AddtlRmtInf" type="Max140Text" minOccurs="0" maxOccurs="1"/>

simpleType **ActiveOrHistoricCurrencyAndAmount_SimpleType**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of xs:decimal
properties	base xs:decimal
used by	complexType ActiveOrHistoricCurrencyAndAmount_HRK
facets	Kind Value Annotation minInclusive 0.01 maxInclusive 999999999.99 totalDigits 11 fractionDigits 2 whiteSpace collapse
source	<xs:simpleType name="ActiveOrHistoricCurrencyAndAmount_SimpleType"> <xs:restriction base="xs:decimal"> <xs:minInclusive value="0.01"/> <xs:fractionDigits value="2"/> <xs:totalDigits value="11"/> <xs:maxInclusive value="999999999.99"/> <xs:whiteSpace value="collapse"/> </xs:restriction> </xs:simpleType>

simpleType **ActiveOrHistoricCurrencyCode_HRK**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of xs:string
properties	base xs:string
used by	element CashAccount16_HR/Ccy attribute ActiveOrHistoricCurrencyAndAmount_HRK/@Ccy
facets	Kind Value Annotation enumeration HRK enumeration EUR

source	<pre> <xs:simpleType name="ActiveOrHistoricCurrencyCode_HRK"> <xs:restriction base="xs:string"> <xs:enumeration value="HRK"/> <xs:enumeration value="EUR"/> </xs:restriction> </xs:simpleType> </pre>
--------	---

simpleType AnyBICIdentifier

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	OrganisationIdentification4/BICOrBEI	
facets	Kind pattern	Value [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}	Annotation
source	<pre> <xs:simpleType name="AnyBICIdentifier"> <xs:restriction base="xs:string"> <xs:pattern value="[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}"/> </xs:restriction> </xs:simpleType> </pre>		

simpleType BatchBookingIndicator

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	xs:boolean
properties	base xs:boolean
used by	element PaymentInstructionInformation4/BtchBookg
source	<xs:simpleType name="BatchBookingIndicator"> <xs:restriction base="xs:boolean"/> </xs:simpleType>

simpleType BICIdentifier

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	FinancialInstitutionIdentification7_1/BIC	
facets	Kind pattern	Value [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}	Annotation
source	<pre> <xs:simpleType name="BICIdentifier"> <xs:restriction base="xs:string"> <xs:pattern value="[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}"/> </xs:restriction> </xs:simpleType> </pre>		

simpleType ChargeBearerType1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	elements	DirectDebitTransactionInformation9/ChrgBr PaymentInstructionInformation4/ChrgBr	
facets	Kind enumeration	Value SLEV	Annotation
source	<pre><xs:simpleType name="ChargeBearerType1Code"> <xs:restriction base="xs:string"> <xs:enumeration value="SLEV"/> </xs:restriction> </xs:simpleType></pre>		

simpleType CountryCode

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	elements	PostalAddress6/Ctry DateAndPlaceOfBirth/CtryOfBirth	
facets	Kind	Value	Annotation
	pattern	[A-Z]{2,2}	
source	<pre><xs:simpleType name="CountryCode"> <xs:restriction base="xs:string"> <xs:pattern value="[A-Z]{2,2}"/> </xs:restriction> </xs:simpleType></pre>		

simpleType DecimalNumber

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:decimal		
properties	base xs:decimal		
used by	elements	GroupHeader39/CtrlSum PaymentInstructionInformation4/CtrlSum	
facets	Kind	Value	Annotation
	minInclusive	0.01	
	maxInclusive	9999999999999999.99	
	totalDigits	18	
	fractionDigits	2	
source	<pre><xs:simpleType name="DecimalNumber"> <xs:restriction base="xs:decimal"> <xs:fractionDigits value="2"/> <xs:totalDigits value="18"/> <xs:minInclusive value="0.01"/> <xs:maxInclusive value="9999999999999999.99"/> </xs:restriction></pre>		

	</xs:simpleType>
--	------------------

simpleType DocumentType3Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	CreditorReferenceType1Choice/Cd	
facets	Kind enumeration	Value SCOR	Annotation
source	<pre><xs:simpleType name="DocumentType3Code"> <xs:restriction base="xs:string"> <xs:enumeration value="SCOR"/> </xs:restriction> </xs:simpleType></pre>		

simpleType ExternalAccountIdentification1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02									
type	restriction of xs:string									
properties	base xs:string									
facets	<table><thead><tr><th>Kind</th><th>Value</th><th>Annotation</th></tr></thead><tbody><tr><td>minLength</td><td>1</td><td></td></tr><tr><td>maxLength</td><td>4</td><td></td></tr></tbody></table>	Kind	Value	Annotation	minLength	1		maxLength	4	
Kind	Value	Annotation								
minLength	1									
maxLength	4									
source	<pre><xs:simpleType name="ExternalAccountIdentification1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType></pre>									

simpleType ExternalCategoryPurpose1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base xs:string		
used by	element	CategoryPurpose1Choice/Cd	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	4	
source	<pre><xs:simpleType name="ExternalCategoryPurpose1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType></pre>		

simpleType ExternalFinancialInstitutionIdentification1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	FinancialIdentificationSchemeName1Choice/Cd	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	4	
source	<pre><xs:simpleType name="ExternalFinancialInstitutionIdentification1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType></pre>		

simpleType ExternalLocalInstrument1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	LocalInstrument2Choice/Cd	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	35	
	enumeration	CORE	
	enumeration	B2B	
source	<pre><xs:simpleType name="ExternalLocalInstrument1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> <xs:enumeration value="CORE"/> <xs:enumeration value="B2B"/> </xs:restriction> </xs:simpleType></pre>		

simpleType ExternalOrganisationIdentification1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	OrganisationIdentificationSchemeName1Choice/Cd	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	4	

source	<pre> <xs:simpleType name="ExternalOrganisationIdentification1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType> </pre>
--------	--

simpleType ExternalPersonIdentification1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	PersonIdentificationSchemeName1Choice 1/Cd	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	4	
source	<pre><xs:simpleType name="ExternalPersonIdentification1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType></pre>		

simpleType ExternalPurpose1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	Purpose2Choice/Cd	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	4	
source	<pre><xs:simpleType name="ExternalPurpose1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType></pre>		

simpleType ExternalServiceLevel1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of xs:string
properties	base xs:string
used by	element ServiceLevel8Choice/Cd

facets	Kind	Value	Annotation
	minLength	1	
	maxLength	4	
	enumeration	SEPA	
source	<pre><xs:simpleType name="ExternalServiceLevel1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> <xs:enumeration value="SEPA"/> </xs:restriction> </xs:simpleType></pre>		

simpleType IBAN2007Identifier

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	AccountIdentification4Choice 3/IBAN	
facets	Kind	Value	Annotation
	pattern	[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}	
source	<xs:simpleType name="IBAN2007Identifier"> <xs:restriction base="xs:string"> <xs:pattern value="[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}"/> </xs:restriction> </xs:simpleType>		

simpleType IBAN2007Identifier_HR

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	AccountIdentification4Choice_HR/IBAN	
facets	Kind	Value	Annotation
	pattern	[H][R][0-9]{19}	
source	<pre><xs:simpleType name="IBAN2007Identifier_HR"> <xs:restriction base="xs:string"> <xs:pattern value="[H][R][0-9]{19}"/> </xs:restriction> </xs:simpleType></pre>		

simpleType ISODate

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	xs:date		
properties	base	xs:date	
used by	elements	DateAndPlaceOfBirth/BirthDt MandateRelatedInformation6/DtOfSgntr PaymentInstructionInformation4/ReqdColltnDt	

source	<pre><xs:simpleType name="ISODate"> <xs:restriction base="xs:date"/> </xs:simpleType></pre>
--------	---

simpleType **ISODateTime**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	xs:dateTime
properties	base xs:dateTime
used by	element GroupHeader39/CredtTm
source	<pre><xs:simpleType name="ISODateTime"> <xs:restriction base="xs:dateTime"/> </xs:simpleType></pre>

simpleType **Max1025Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	MandateRelatedInformation6/ElectncSgnt	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	1025	
source	<pre><xs:simpleType name="Max1025Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="1025"/> </xs:restriction> </xs:simpleType></pre>		

simpleType **Max140Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	elements	StructuredRemittanceInformation7/AddtlRmtInf RemittanceInformation5/Ustrd	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	140	
source	<pre><xs:simpleType name="Max140Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="140"/> </xs:restriction> </xs:simpleType></pre>		

simpleType Max15NumericText

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	elements	GroupHeader39/NbOfTx PaymentInstructionInformation4/NbOfTx	
facets	Kind pattern	Value [0-9]{1,15}	Annotation
source	<pre><xs:simpleType name="Max15NumericText"> <xs:restriction base="xs:string"> <xs:pattern value="[0-9]{1,15}" /> </xs:restriction> </xs:simpleType></pre>		

simpleType Max34Text

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	GenericAccountIdentification1/Id	
facets	Kind minLength maxLength	Value 1 34	Annotation
source	<pre><xs:simpleType name="Max34Text"> <xs:restriction base="xs:string"> <xs:minLength value="1" /> <xs:maxLength value="34" /> </xs:restriction> </xs:simpleType></pre>		

simpleType Max35Text

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	elements	DateAndPlaceOfBirth/CityOfBirth PaymentIdentification1/EndToEndId GenericFinancialIdentification1_2/Id GenericOrganisationIdentification1/Id GenericPersonIdentification1_1/Id PaymentIdentification1/InstrId CreditorReferenceType2/Issr GenericOrganisationIdentification1/Issr GenericPersonIdentification1_1/Issr MandateRelatedInformation6/MndtId GroupHeader39/MsgId AmendmentInformationDetails6/OrqnlMndtId PaymentInstructionInformation4/PmtInflId FinancialIdentificationSchemeName1Choice/Prtry OrganisationIdentificationSchemeName1Choice/Prtry PersonIdentificationSchemeName1Choice_1/Prtry DateAndPlaceOfBirth/PrvcOfBirth CreditorReferenceInformation2/Ref	
facets	Kind minLength maxLength	Value 1 35	Annotation

source	<pre> <xs:simpleType name="Max35Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </pre>
--------	---

simpleType Max35Text_CI

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base	xs:string	
used by	element	GenericPersonIdentification1_2/Id	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	35	
	pattern	[A-Z]{2}[0-9]{2}[a-zA-Z0-9]{4,31}	
source	<pre><xs:simpleType name="Max35Text_CI"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> <xs:pattern value="[A-Z]{2}[0-9]{2}[a-zA-Z0-9]{4,31}"/> </xs:restriction> </xs:simpleType></pre>		

simpleType Max35Text_NP

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base xs:string		
used by	element	GenericFinancialIdentification1_1/Id	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	35	
	enumeration	NOTPROVIDED	
source	<pre><xs:simpleType name="Max35Text_NP"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> <xs:enumeration value="NOTPROVIDED"/> </xs:restriction> </xs:simpleType></pre>		

simpleType Max35Text_SEPA

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		

properties	base	xs:string
used by	element	PersonIdentificationSchemeName1Choice 2/Prtry
facets	Kind	Value Annotation
	minLength	1
	maxLength	35
	enumeration	SEPA
source	<pre><xs:simpleType name="Max35Text_SEPA"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> <xs:enumeration value="SEPA"/> </xs:restriction> </xs:simpleType></pre>	

simpleType Max70Text

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02	
type	restriction of xs:string	
properties	base	xs:string
used by	elements	PostalAddress6/AdrLine PartyIdentification32 1/Nm PartyIdentification32 2/Nm PartyIdentification32 3/Nm PartyIdentification32 5/Nm PartyIdentification32 6/Nm
facets	Kind	Value Annotation
	minLength	1
	maxLength	70
source	<pre><xs:simpleType name="Max70Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="70"/> </xs:restriction> </xs:simpleType></pre>	

simpleType PaymentMethod2Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02	
type	restriction of xs:string	
properties	base	xs:string
used by	element	PaymentInstructionInformation4/PmtMtd
facets	Kind	Value Annotation
	enumeration	DD
source	<pre><xs:simpleType name="PaymentMethod2Code"> <xs:restriction base="xs:string"> <xs:enumeration value="DD"/> </xs:restriction> </xs:simpleType></pre>	

simpleType SequenceType1Code

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02		
type	restriction of xs:string		
properties	base xs:string		
used by	element	PaymentTypeInformation20/SegTp	
facets	Kind	Value	Annotation
	enumeration	FRST	
	enumeration	RCUR	
	enumeration	FNAL	
	enumeration	OOFF	
source	<pre><xs:simpleType name="SequenceType1Code"> <xs:restriction base="xs:string"> <xs:enumeration value="FRST"/> <xs:enumeration value="RCUR"/> <xs:enumeration value="FNAL"/> <xs:enumeration value="OOFF"/> </xs:restriction> </xs:simpleType></pre>		

simpleType TrueFalseIndicator

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	xs:boolean
properties	base xs:boolean
used by	element MandateRelatedInformation6/AmdmntInd
source	<xs:simpleType name="TrueFalseIndicator"> <xs:restriction base="xs:boolean"/> </xs:simpleType>