Schema **sepa.hr.pain.002.001.03.xsd**

schema location: **sepa.hr.pain.002.001.03.xsd**
attributeFormDefault:

elementFormDefault: **qualified**
targetNamespace: **urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03**

Elements
Document

Complex types
AccountIdentification4Choice_HR
AccountIdentification4Choice_HR2
ActiveOrHistoricCurrencyAndAmount
AmendmentInformationDetails6_HR
AmountType3Choice_HR
BranchAndFinancialInstitutionIdentification4_HR
BranchAndFinancialInstitutionIdentification4_HR3
CashAccount16_HR
CashAccount16_HR2
CashAccount16_HR3
CategoryPurpose1Choice_HR
CreditorReferenceInformation2
CreditorReferenceType1Choice
CreditorReferenceType2
CustomerPaymentStatusReportV03
DateAndPlaceOfBirth
Document
FinancialInstitutionIdentification7_HR
FinancialInstitutionIdentification7_HR3
GenericAccountIdentification1_HR
GenericFinancialIdentification1_HR
GenericOrganisationIdentification1
GenericOrganisationIdentification1_HR
GenericPersonIdentification1_HR
GenericPersonIdentification1_HR2
GenericPersonIdentification1_HR3
GenericPersonIdentification1_HR4
GroupHeader36_HR
LocalInstrument2Choice_HR
MandateRelatedInformation6_HR
OrganisationIdentification4_HR
OrganisationIdentification4_HR1
OrganisationIdentification4_HR2
OrganisationIdentification4_HR3
OrganisationIdentificationSchemeName1Choice
OriginalGroupInformation20_HR
OriginalPaymentInformation1_HR
OriginalTransactionReference13_HR

Simple types
ActiveOrHistoricCurrencyAndAmount_SimpleType
ActiveOrHistoricCurrencyCode
AnyBICIdentifier
BICIdentifier
CountryCode
DecimalNumber
DocumentType3Code
ExternalCategoryPurpose1Code
ExternalLocalInstrument1Code
ExternalOrganisationIdentification1Code
ExternalPersonIdentification1Code
ExternalServiceLevel1Code
ExternalStatusReason1Code
IBAN2007Identifier
ISODate
ISODateTime
Max1025Text
Max105Text
Max140Text
Max15NumericText
Max34Text
Max35Text
Max70Text
PaymentMethod4Code
SequenceType1Code
TransactionGroupStatus3Code
TransactionIndividualStatus3Code
TrueFalseIndicator

Party6Choice_HR
Party6Choice_HR1
Party6Choice_HR2
Party6Choice_HR3
Party6Choice_HR4
Party6Choice_HR5
Party6Choice_HR6
PartyIdentification32_HR
PartyIdentification32_HR1
PartyIdentification32_HR3
PartyIdentification32_HR4
PartyIdentification32_HR5
PartyIdentification32_HR6
PartyIdentification32_HR7
PaymentTransactionInformation25_HR
PaymentTypeInformation22_HR
PersonIdentification5_HR
PersonIdentification5_HR2
PersonIdentification5_HR3
PersonIdentification5_HR4
PersonIdentification5_HR5
PersonIdentificationSchemeName1Choice
PersonIdentificationSchemeName1Choice_HR
PostalAddress6_HR
RemittanceInformation5
ServiceLevel8Choice_HR
StatusReason6Choice_HR
StatusReasonInformation8_HR
StatusReasonInformation8_HR2
StructuredRemittanceInformation7

element **Document**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	Document
properties	content complex
children	CstmrPmtStsRpt
source	<xs:element name="Document" type="Document"/>

complexType **AccountIdentification4Choice_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Othr**
used by	element **CashAccount16_HR/Id**

source	`<xs:complexType name="AccountIdentification4Choice_HR">`
	`  <xs:sequence>`
	`  <xs:element name="Othr" type="GenericAccountIdentification1_HR"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **AccountIdentification4Choice_HR/Othr**

diagram	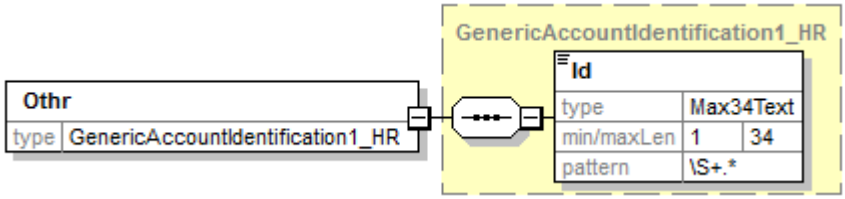
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericAccountIdentification1_HR**
properties	content complex
children	**Id**
source	`<xs:element name="Othr" type="GenericAccountIdentification1_HR"/>`

complexType **AccountIdentification4Choice_HR2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**IBAN**
used by	elements **CashAccount16_HR2/Id** **CashAccount16_HR3/Id**

source	`<xs:complexType name="AccountIdentification4Choice_HR2">`
	`  <xs:sequence>`
	`  <xs:element name="IBAN" type="IBAN2007Identifier"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **AccountIdentification4Choice_HR2/IBAN**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**IBAN2007Identifier**
properties	content simple
facets	Kind / Value / Annotation pattern / [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
source	`<xs:element name="IBAN" type="IBAN2007Identifier"/>`

complexType **ActiveOrHistoricCurrencyAndAmount**

diagram	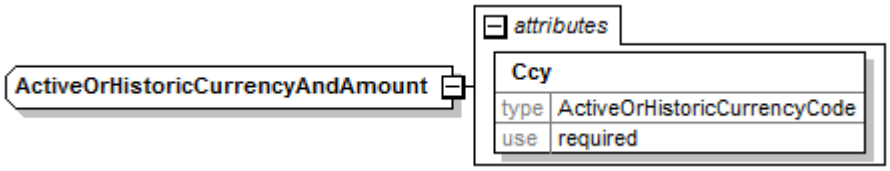
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	extension of **ActiveOrHistoricCurrencyAndAmount_SimpleType**
properties	base ActiveOrHistoricCurrencyAndAmount_SimpleType
used by	element **AmountType3Choice_HR/InstdAmt**
facets	Kind / Value / Annotation minInclusive / 0.01 maxInclusive / 999999999.99 totalDigits / 11 fractionDigits / 2 whiteSpace / collapse
attributes	Name / Type / Use / Default / Fixed / Annotation Ccy / **ActiveOrHistoricCurrencyCode** / required

source	`<xs:complexType name="ActiveOrHistoricCurrencyAndAmount">`
	`  <xs:simpleContent>`
	`  <xs:extension base="ActiveOrHistoricCurrencyAndAmount_SimpleType">`
	`  <xs:attribute name="Ccy" type="ActiveOrHistoricCurrencyCode" use="required"/>`
	`  </xs:extension>`
	`  </xs:simpleContent>`
	`</xs:complexType>`

attribute **ActiveOrHistoricCurrencyAndAmount/@Ccy**

type	**ActiveOrHistoricCurrencyCode**
properties	use required
facets	Kind / Value / Annotation pattern / [A-Z]{3,3}

source	<xs:attribute name="Ccy" type="ActiveOrHistoricCurrencyCode" use="required"/>

complexType **AmendmentInformationDetails6_HR**

diagram	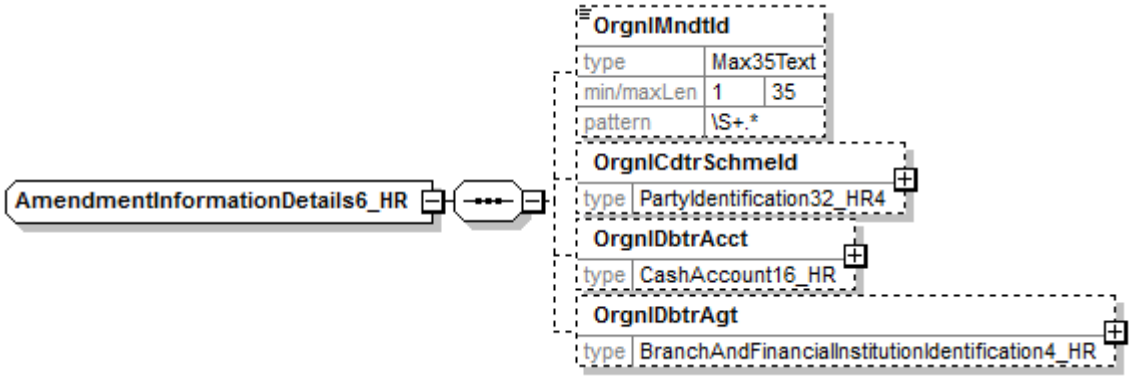
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**OrgnlMndtId** **OrgnlCdtrSchmeId** **OrgnlDbtrAcct** **OrgnlDbtrAgt**
used by	element **MandateRelatedInformation6_HR/AmdmntInfDtls**
source	<xs:complexType name="AmendmentInformationDetails6_HR"> <xs:sequence> <xs:element name="OrgnlMndtId" type="Max35Text" minOccurs="0" maxOccurs="1"/> <xs:element name="OrgnlCdtrSchmeId" type="PartyIdentification32_HR4" minOccurs="0" maxOccurs="1"/> <xs:element name="OrgnlDbtrAcct" type="CashAccount16_HR" minOccurs="0" maxOccurs="1"/> <xs:element name="OrgnlDbtrAgt" type="BranchAndFinancialInstitutionIdentification4_HR" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **AmendmentInformationDetails6_HR/OrgnlMndtId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="OrgnlMndtId" type="Max35Text" minOccurs="0" maxOccurs="1"/>

element **AmendmentInformationDetails6_HR/OrgnlCdtrSchmeId**

diagram	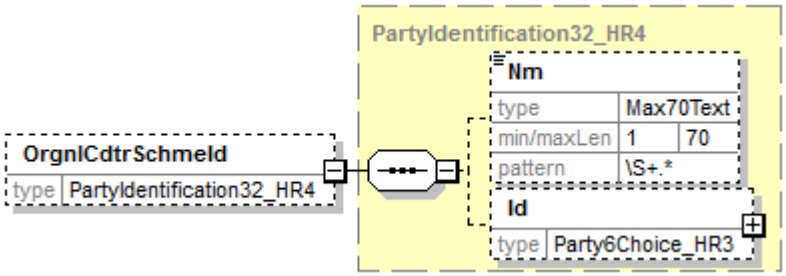
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PartyIdentification32_HR4**
properties	minOcc 0 maxOcc 1 content complex
children	**Nm** **Id**
source	<xs:element name="OrgnlCdtrSchmeId" type="PartyIdentification32_HR4" minOccurs="0" maxOccurs="1"/>

element **AmendmentInformationDetails6_HR/OrgnlDbtrAcct**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CashAccount16_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**Id**
source	<xs:element name="OrgnlDbtrAcct" type="CashAccount16_HR" minOccurs="0" maxOccurs="1"/>

element **AmendmentInformationDetails6_HR/OrgnlDbtrAgt**

diagram	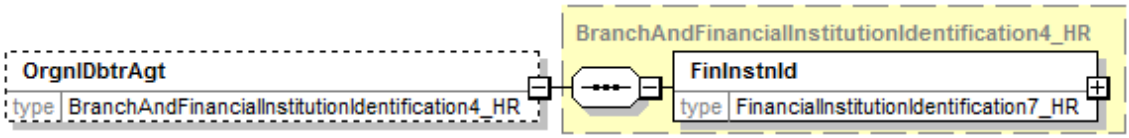
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**BranchAndFinancialInstitutionIdentification4_HR**
properties	minOcc 0 maxOcc 1 content complex

children	**FinInstnId**
source	<xs:element name="OrgnlDbtrAgt" type="BranchAndFinancialInstitutionIdentification4_HR" minOccurs="0" maxOccurs="1"/>

complexType **AmountType3Choice_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**InstdAmt**
used by	element **OriginalTransactionReference13_HR/Amt**
source	<xs:complexType name="AmountType3Choice_HR"> <xs:sequence> <xs:element name="InstdAmt" type="ActiveOrHistoricCurrencyAndAmount"/> </xs:sequence> </xs:complexType>

element **AmountType3Choice_HR/InstdAmt**

diagram	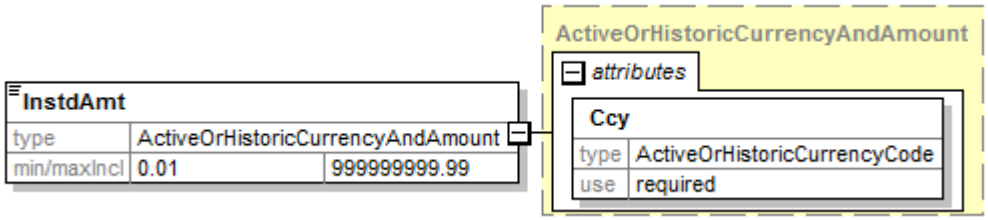
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ActiveOrHistoricCurrencyAndAmount**
properties	content complex
facets	Kind / Value / Annotation minInclusive 0.01 maxInclusive 999999999.99 totalDigits 11 fractionDigits 2 whiteSpace collapse
attributes	Name / Type / Use / Default / Fixed / Annotation Ccy / **ActiveOrHistoricCurrencyCode** / required
source	<xs:element name="InstdAmt" type="ActiveOrHistoricCurrencyAndAmount"/>

complexType **BranchAndFinancialInstitutionIdentification4_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**FinInstnId**
used by	elements **GroupHeader36_HR/CdtrAgt** **AmendmentInformationDetails6_HR/OrgnlDbtrAgt**

source	`<xs:complexType name="BranchAndFinancialInstitutionIdentification4_HR">`
	`  <xs:sequence>`
	`  <xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_HR"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **BranchAndFinancialInstitutionIdentification4_HR/FinInstnId**

diagram	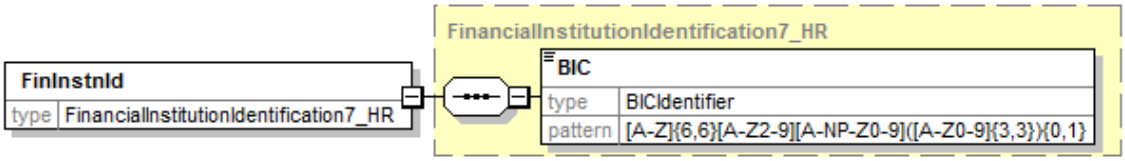
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**FinancialInstitutionIdentification7_HR**
properties	content complex
children	**BIC**
source	`<xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_HR"/>`

complexType **BranchAndFinancialInstitutionIdentification4_HR3**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**FinInstnId**
used by	elements **OriginalTransactionReference13_HR/CdtrAgt** **OriginalTransactionReference13_HR/DbtrAgt**

source	`<xs:complexType name="BranchAndFinancialInstitutionIdentification4_HR3">`
	`  <xs:sequence>`
	`  <xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_HR3"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **BranchAndFinancialInstitutionIdentification4_HR3/FinInstnId**

diagram	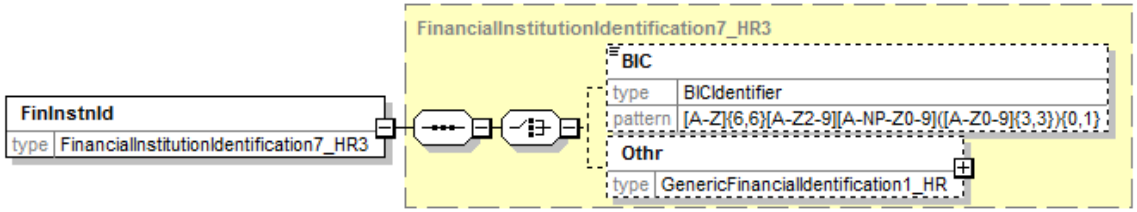
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**FinancialInstitutionIdentification7_HR3**
properties	content complex
children	**BIC** **Othr**
source	<xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_HR3"/>

complexType **CashAccount16_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id**
used by	element **AmendmentInformationDetails6_HR/OrgnlDbtrAcct**
source	<xs:complexType name="CashAccount16_HR"> <xs:sequence> <xs:element name="Id" type="AccountIdentification4Choice_HR"/> </xs:sequence> </xs:complexType>

element **CashAccount16_HR/Id**

diagram	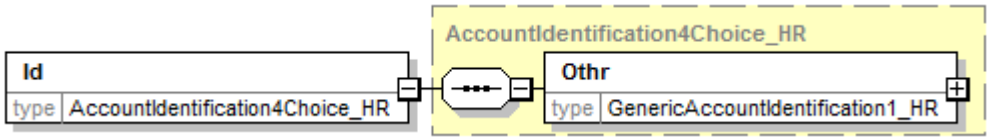
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AccountIdentification4Choice_HR**
properties	content complex
children	**Othr**
source	<xs:element name="Id" type="AccountIdentification4Choice_HR"/>

complexType **CashAccount16_HR2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id**
used by	element **OriginalTransactionReference13_HR/DbtrAcct**

source	`<xs:complexType name="CashAccount16_HR2">`
	`  <xs:sequence>`
	`  <xs:element name="Id" type="AccountIdentification4Choice_HR2"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **CashAccount16_HR2/Id**

diagram	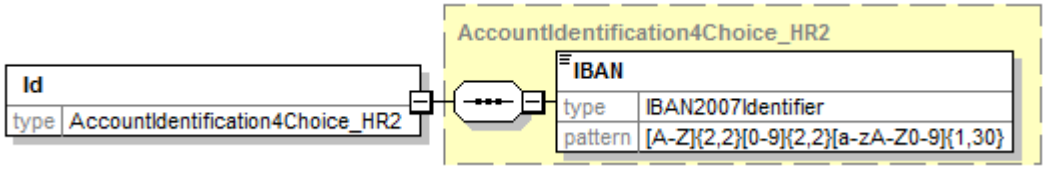
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AccountIdentification4Choice_HR2**
properties	content complex
children	**IBAN**
source	`<xs:element name="Id" type="AccountIdentification4Choice_HR2"/>`

complexType **CashAccount16_HR3**

diagram	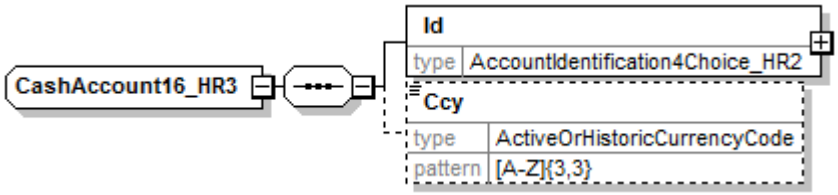
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id** **Ccy**
used by	element **OriginalTransactionReference13_HR/CdtrAcct**

source	`<xs:complexType name="CashAccount16_HR3">`
	`  <xs:sequence>`
	`  <xs:element name="Id" type="AccountIdentification4Choice_HR2"/>`
	`  <xs:element name="Ccy" type="ActiveOrHistoricCurrencyCode" minOccurs="0"`
	`maxOccurs="1"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **CashAccount16_HR3/Id**

diagram	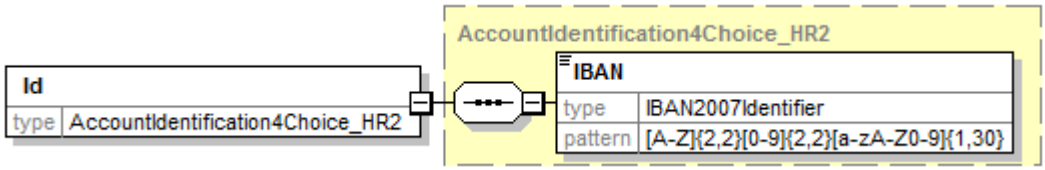
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AccountIdentification4Choice_HR2**
properties	content complex
children	**IBAN**
source	<xs:element name="Id" type="AccountIdentification4Choice_HR2"/>

element **CashAccount16_HR3/Ccy**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ActiveOrHistoricCurrencyCode**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{3,3}
source	<xs:element name="Ccy" type="ActiveOrHistoricCurrencyCode" minOccurs="0" maxOccurs="1"/>

complexType **CategoryPurpose1Choice_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Cd**
used by	element **PaymentTypeInformation22_HR/CtgyPurp**
source	<xs:complexType name="CategoryPurpose1Choice_HR"> <xs:sequence> <xs:element name="Cd" type="ExternalCategoryPurpose1Code"/> </xs:sequence> </xs:complexType>

element **CategoryPurpose1Choice_HR/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ExternalCategoryPurpose1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4
source	<xs:element name="Cd" type="ExternalCategoryPurpose1Code"/>

complexType **CreditorReferenceInformation2**

diagram	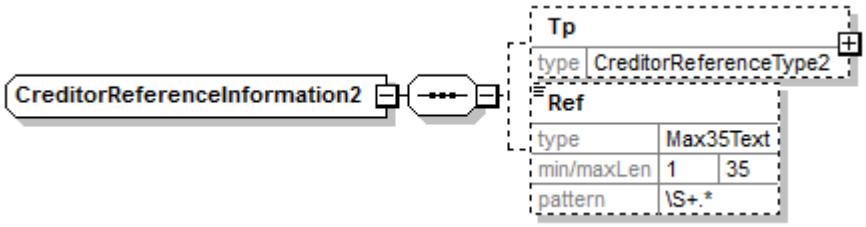
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Tp** **Ref**
used by	element **StructuredRemittanceInformation7/CdtrRefInf**
source	<xs:complexType name="CreditorReferenceInformation2"> <xs:sequence> <xs:element name="Tp" type="CreditorReferenceType2" minOccurs="0" maxOccurs="1"/> <xs:element name="Ref" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **CreditorReferenceInformation2/Tp**

diagram	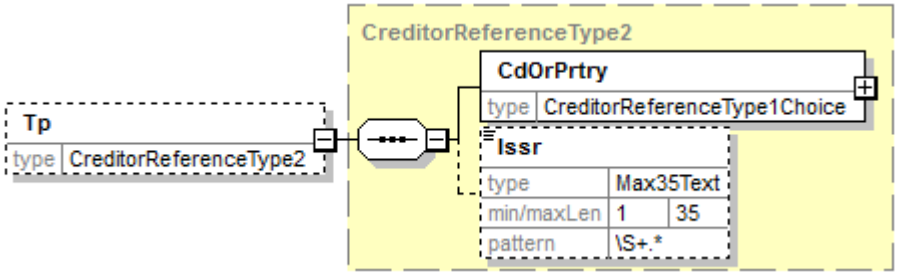
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CreditorReferenceType2**

properties	minOcc 0 maxOcc 1 content complex
children	**CdOrPrtry** **Issr**
source	<xs:element name="Tp" type="CreditorReferenceType2" minOccurs="0" maxOccurs="1"/>

element **CreditorReferenceInformation2/Ref**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Ref" type="Max35Text" minOccurs="0" maxOccurs="1"/>

complexType **CreditorReferenceType1Choice**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Cd**
used by	element **CreditorReferenceType2/CdOrPrtry**
source	<xs:complexType name="CreditorReferenceType1Choice"> <xs:sequence> <xs:element name="Cd" type="DocumentType3Code"/> </xs:sequence> </xs:complexType>

element **CreditorReferenceType1Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**DocumentType3Code**
properties	content simple

facets	Kind: enumeration; Value: SCOR; Annotation:
source	<xs:element name="Cd" type="DocumentType3Code"/>

complexType **CreditorReferenceType2**

diagram	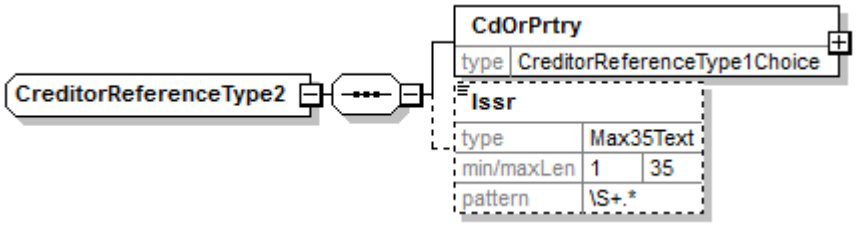
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**CdOrPrtry** **Issr**
used by	element **CreditorReferenceInformation2/Tp**
source	<xs:complexType name="CreditorReferenceType2"> <xs:sequence> <xs:element name="CdOrPrtry" type="CreditorReferenceType1Choice"/> <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **CreditorReferenceType2/CdOrPrtry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CreditorReferenceType1Choice**
properties	content complex
children	**Cd**
source	<xs:element name="CdOrPrtry" type="CreditorReferenceType1Choice"/>

element **CreditorReferenceType2/Issr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**

properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>

complexType **CustomerPaymentStatusReportV03**

diagram	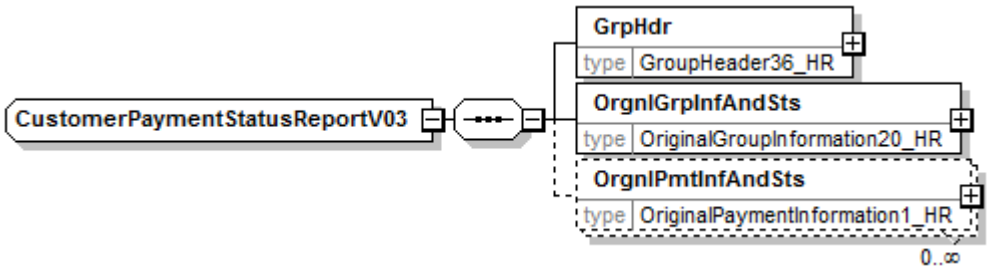
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**GrpHdr** **OrgnlGrpInfAndSts** **OrgnlPmtInfAndSts**
used by	element **Document/CstmrPmtStsRpt**
source	<xs:complexType name="CustomerPaymentStatusReportV03"> <xs:sequence> <xs:element name="GrpHdr" type="GroupHeader36_HR"/> <xs:element name="OrgnlGrpInfAndSts" type="OriginalGroupInformation20_HR"/> <xs:element name="OrgnlPmtInfAndSts" type="OriginalPaymentInformation1_HR" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType>

element **CustomerPaymentStatusReportV03/GrpHdr**

diagram	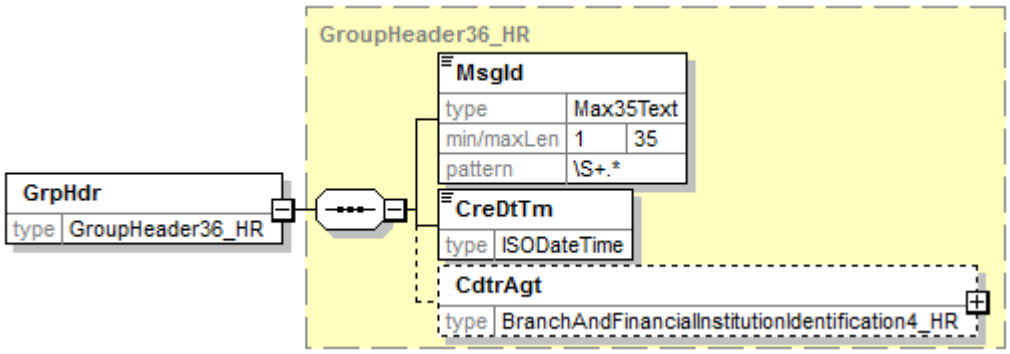
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GroupHeader36_HR**
properties	content complex

children	**MsgId** **CreDtTm** **CdtrAgt**
source	<xs:element name="GrpHdr" type="GroupHeader36_HR"/>

element **CustomerPaymentStatusReportV03/OrgnlGrpInfAndSts**

diagram	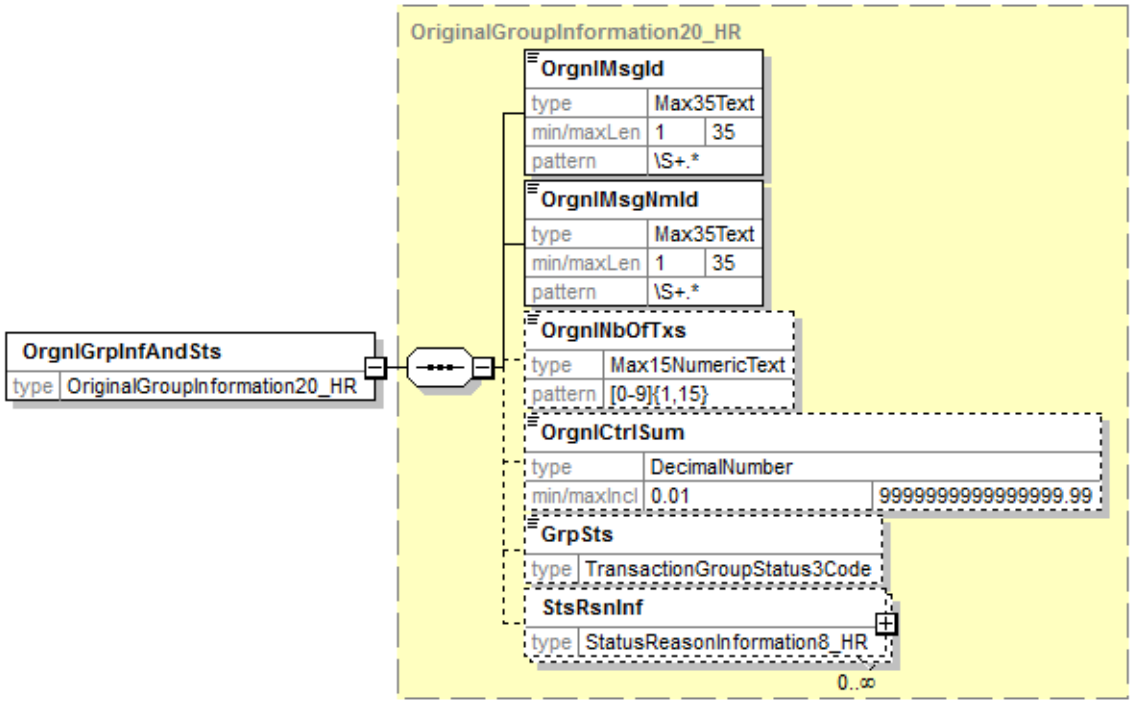
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OriginalGroupInformation20_HR**
properties	content complex
children	**OrgnlMsgId** **OrgnlMsgNmId** **OrgnlNbOfTxs** **OrgnlCtrlSum** **GrpSts** **StsRsnInf**
source	<xs:element name="OrgnlGrpInfAndSts" type="OriginalGroupInformation20_HR"/>

element **CustomerPaymentStatusReportV03/OrgnlPmtInfAndSts**

diagram	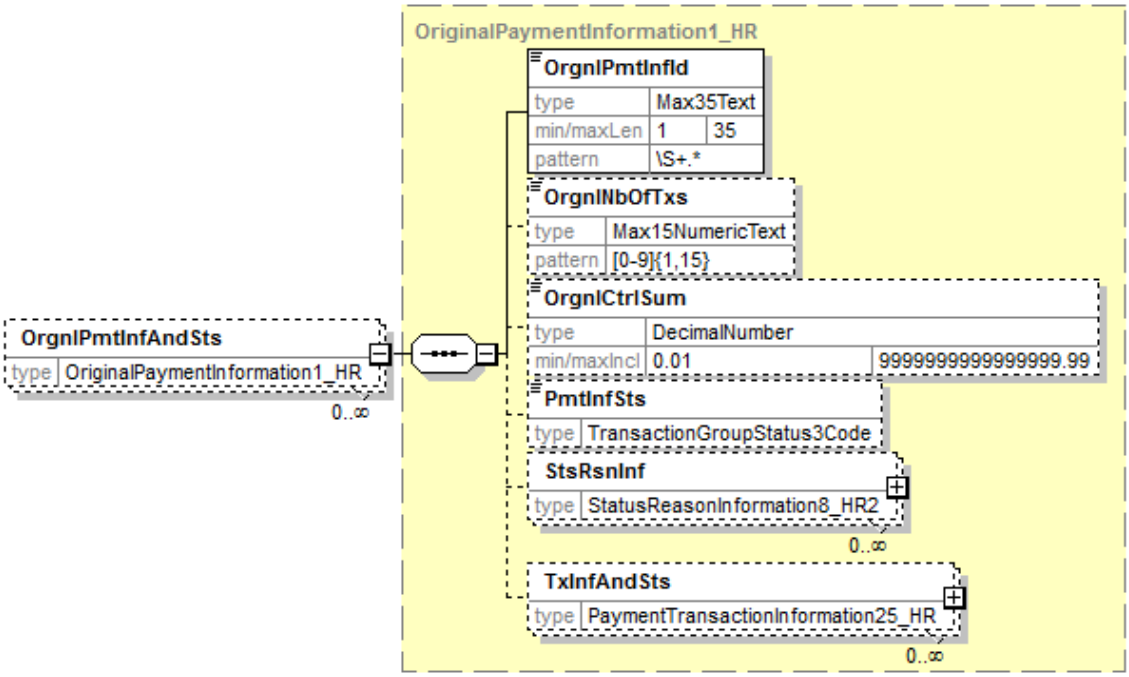
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OriginalPaymentInformation1_HR**
properties	minOcc 0 maxOcc unbounded content complex
children	**OrgnlPmtInfId** **OrgnlNbOfTxs** **OrgnlCtrlSum** **PmtInfSts** **StsRsnInf** **TxInfAndSts**
source	<xs:element name="OrgnlPmtInfAndSts" type="OriginalPaymentInformation1_HR" minOccurs="0" maxOccurs="unbounded"/>

complexType **DateAndPlaceOfBirth**

diagram	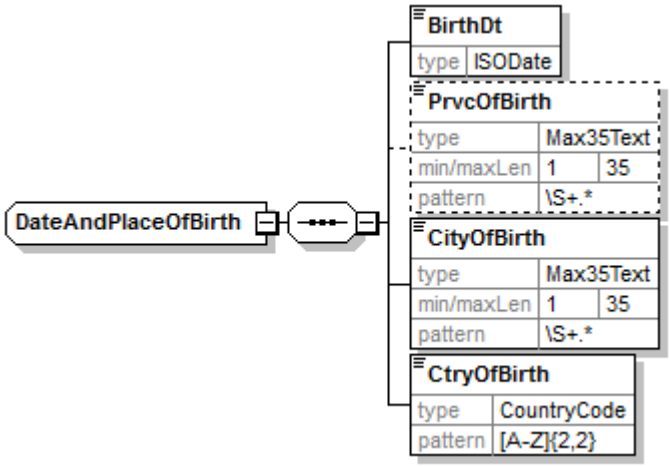
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03

children	**BirthDt** **PrvcOfBirth** **CityOfBirth** **CtryOfBirth**
used by	elements **PersonIdentification5_HR3/DtAndPlcOfBirth** **PersonIdentification5_HR4/DtAndPlcOfBirth** **PersonIdentification5_HR5/DtAndPlcOfBirth**

source	`<xs:complexType name="DateAndPlaceOfBirth">`
	`  <xs:sequence>`
	`  <xs:element name="BirthDt" type="ISODate"/>`
	`  <xs:element name="PrvcOfBirth" type="Max35Text" minOccurs="0" maxOccurs="1"/>`
	`  <xs:element name="CityOfBirth" type="Max35Text"/>`
	`  <xs:element name="CtryOfBirth" type="CountryCode"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **DateAndPlaceOfBirth/BirthDt**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ISODate**
properties	content simple
source	`<xs:element name="BirthDt" type="ISODate"/>`

element **DateAndPlaceOfBirth/PrvcOfBirth**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="PrvcOfBirth" type="Max35Text" minOccurs="0" maxOccurs="1"/>`

element **DateAndPlaceOfBirth/CityOfBirth**

diagram	

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="CityOfBirth" type="Max35Text"/>`

element **DateAndPlaceOfBirth/CtryOfBirth**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CountryCode**
properties	content simple
facets	Kind / Value / Annotation pattern [A-Z]{2,2}
source	`<xs:element name="CtryOfBirth" type="CountryCode"/>`

complexType **Document**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**CstmrPmtStsRpt**
used by	element **Document**

source	`<xs:complexType name="Document">`
	`  <xs:sequence>`
	`  <xs:element name="CstmrPmtStsRpt" type="CustomerPaymentStatusReportV03"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **Document/CstmrPmtStsRpt**

diagram	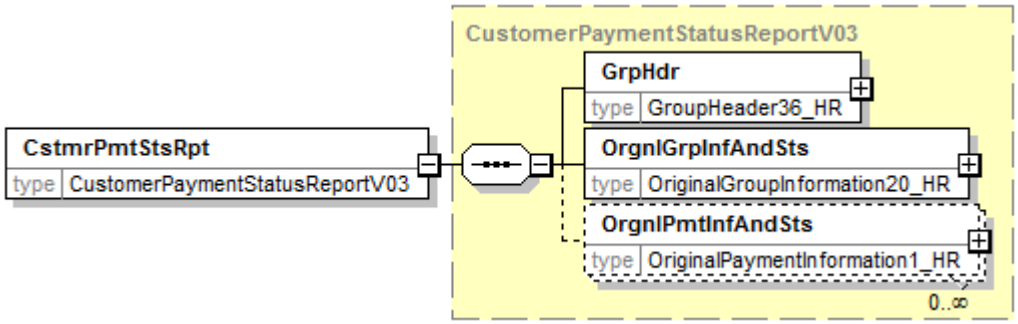
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CustomerPaymentStatusReportV03**
properties	content complex
children	**GrpHdr** **OrgnlGrpInfAndSts** **OrgnlPmtInfAndSts**
source	`<xs:element name="CstmrPmtStsRpt" type="CustomerPaymentStatusReportV03"/>`

complexType **FinancialInstitutionIdentification7_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**BIC**
used by	element **BranchAndFinancialInstitutionIdentification4_HR/FinInstnId**

source	`<xs:complexType name="FinancialInstitutionIdentification7_HR">`
	`  <xs:sequence>`
	`  <xs:element name="BIC" type="BICIdentifier" maxOccurs="1"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **FinancialInstitutionIdentification7_HR/BIC**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**BICIdentifier**
properties	content simple
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	`<xs:element name="BIC" type="BICIdentifier" maxOccurs="1"/>`

complexType **FinancialInstitutionIdentification7_HR3**

diagram	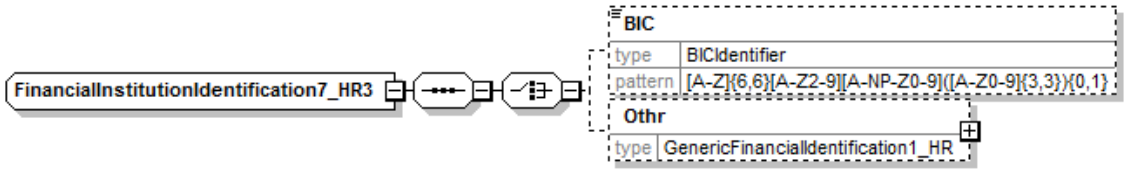
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**BIC** **Othr**
used by	element **BranchAndFinancialInstitutionIdentification4_HR3/FinInstnId**

source	`<xs:complexType name="FinancialInstitutionIdentification7_HR3">`
	`  <xs:sequence>`
	`  <xs:choice>`
	`  <xs:element name="BIC" type="BICIdentifier" minOccurs="0" maxOccurs="1"/>`
	`  <xs:element name="Othr" type="GenericFinancialIdentification1_HR" minOccurs="0" maxOccurs="1"/>`
	`  </xs:choice>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **FinancialInstitutionIdentification7_HR3/BIC**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**BICIdentifier**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	`<xs:element name="BIC" type="BICIdentifier" minOccurs="0" maxOccurs="1"/>`

element **FinancialInstitutionIdentification7_HR3/Othr**

diagram	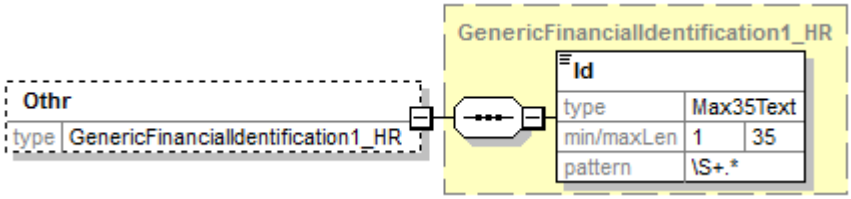
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericFinancialIdentification1_HR**

properties	minOcc 0 maxOcc 1 content complex
children	**Id**
source	<xs:element name="Othr" type="GenericFinancialIdentification1_HR" minOccurs="0" maxOccurs="1"/>

complexType **GenericAccountIdentification1_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id**
used by	element **AccountIdentification4Choice_HR/Othr**
source	<xs:complexType name="GenericAccountIdentification1_HR"> <xs:sequence> <xs:element name="Id" type="Max34Text"/> </xs:sequence> </xs:complexType>

element **GenericAccountIdentification1_HR/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max34Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 34 pattern \S+.*
source	<xs:element name="Id" type="Max34Text"/>

complexType **GenericFinancialIdentification1_HR**

diagram	

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id**
used by	element **FinancialInstitutionIdentification7_HR3/Othr**
source	<xs:complexType name="GenericFinancialIdentification1_HR"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> </xs:sequence> </xs:complexType>

element **GenericFinancialIdentification1_HR/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

complexType **GenericOrganisationIdentification1**

diagram	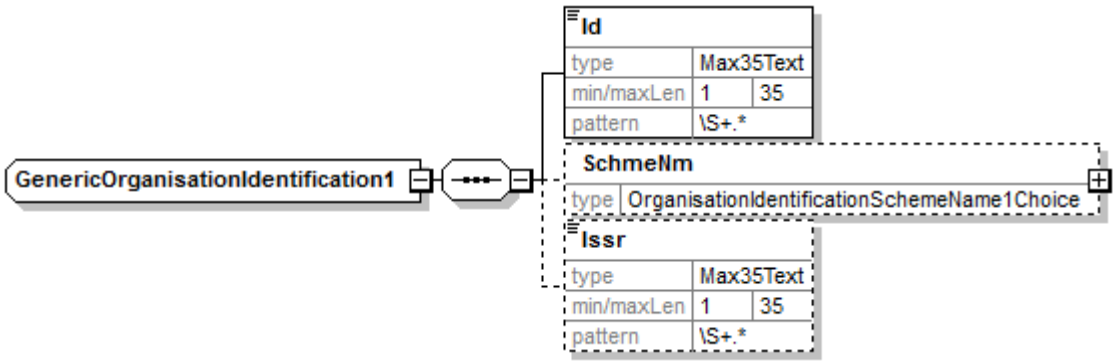
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id** **SchmeNm** **Issr**
used by	element **OrganisationIdentification4_HR2/Othr**
source	<xs:complexType name="GenericOrganisationIdentification1"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> <xs:element name="SchmeNm" type="OrganisationIdentificationSchemeName1Choice" minOccurs="0" maxOccurs="1"/>

```
    <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

element **GenericOrganisationIdentification1/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

element **GenericOrganisationIdentification1/SchmeNm**

diagram	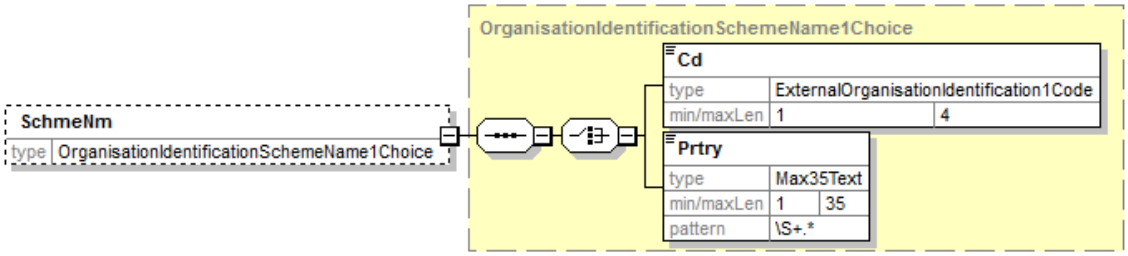
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OrganisationIdentificationSchemeName1Choice**
properties	minOcc 0 maxOcc 1 content complex
children	**Cd** **Prtry**
source	<xs:element name="SchmeNm" type="OrganisationIdentificationSchemeName1Choice" minOccurs="0" maxOccurs="1"/>

element **GenericOrganisationIdentification1/Issr**

diagram	

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>`

complexType **GenericOrganisationIdentification1_HR**

diagram	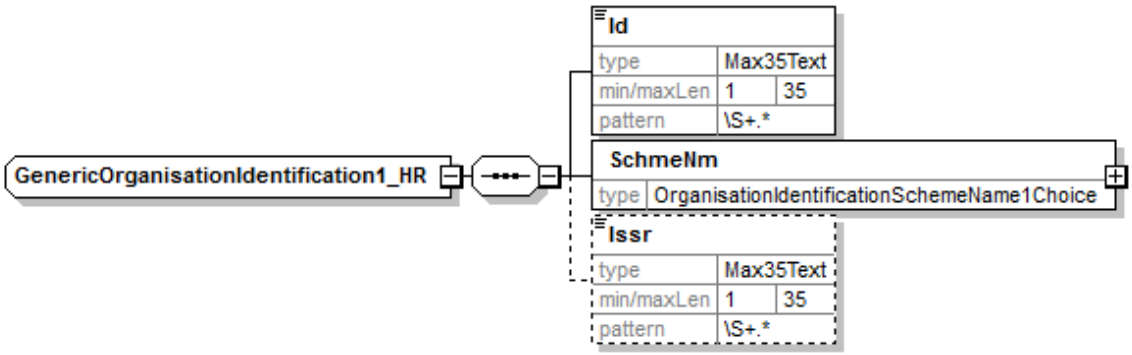
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id** **SchmeNm** **Issr**
used by	element **OrganisationIdentification4_HR3/Othr**

source	`<xs:complexType name="GenericOrganisationIdentification1_HR">`
	`  <xs:sequence>`
	`  <xs:element name="Id" type="Max35Text"/>`
	`  <xs:element name="SchmeNm" type="OrganisationIdentificationSchemeName1Choice"/>`
	`  <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **GenericOrganisationIdentification1_HR/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1

	maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

element **GenericOrganisationIdentification1_HR/SchmeNm**

diagram	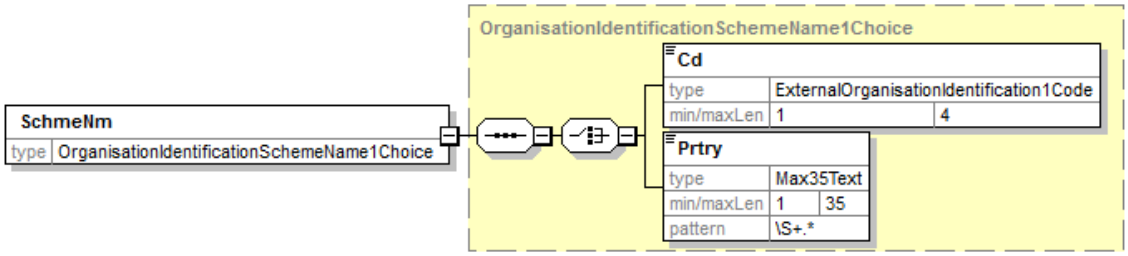
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OrganisationIdentificationSchemeName1Choice**
properties	content complex
children	**Cd** **Prtry**
source	<xs:element name="SchmeNm" type="OrganisationIdentificationSchemeName1Choice"/>

element **GenericOrganisationIdentification1_HR/Issr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>

complexType **GenericPersonIdentification1_HR**

diagram	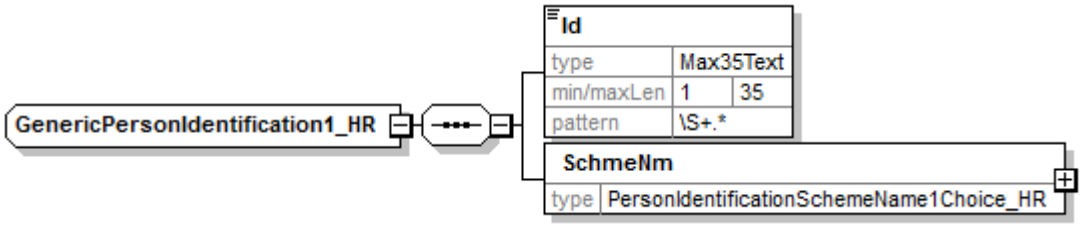
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id** **SchmeNm**
used by	element **PersonIdentification5_HR/Othr**

source	`<xs:complexType name="GenericPersonIdentification1_HR">`
	`  <xs:sequence>`
	`  <xs:element name="Id" type="Max35Text"/>`
	`  <xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_HR"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **GenericPersonIdentification1_HR/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="Id" type="Max35Text"/>`

element **GenericPersonIdentification1_HR/SchmeNm**

diagram	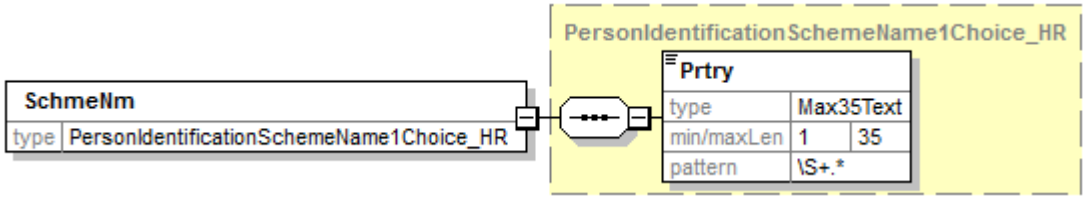
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentificationSchemeName1Choice_HR**
properties	content complex

children	**Prtry**
source	<xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_HR"/>

complexType **GenericPersonIdentification1_HR2**

diagram	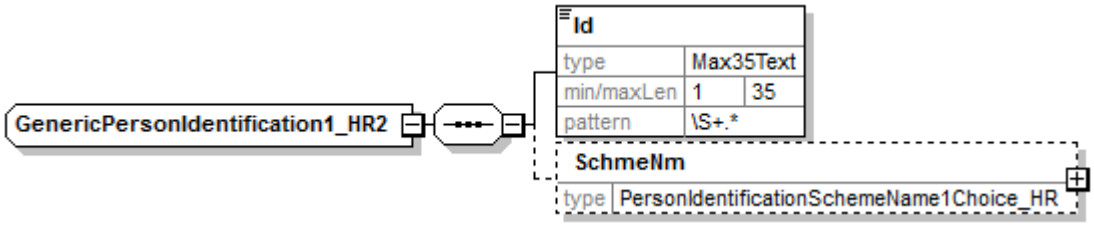
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id** **SchmeNm**
used by	element **PersonIdentification5_HR2/Othr**
source	<xs:complexType name="GenericPersonIdentification1_HR2"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> <xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_HR" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **GenericPersonIdentification1_HR2/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

element **GenericPersonIdentification1_HR2/SchmeNm**

diagram	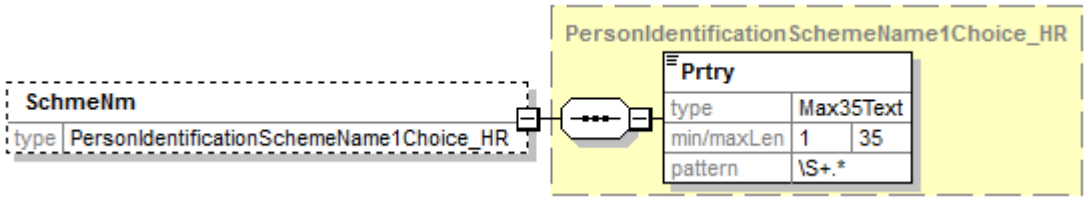
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentificationSchemeName1Choice_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**Prtry**
source	<xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_HR" minOccurs="0" maxOccurs="1"/>

complexType **GenericPersonIdentification1_HR3**

diagram	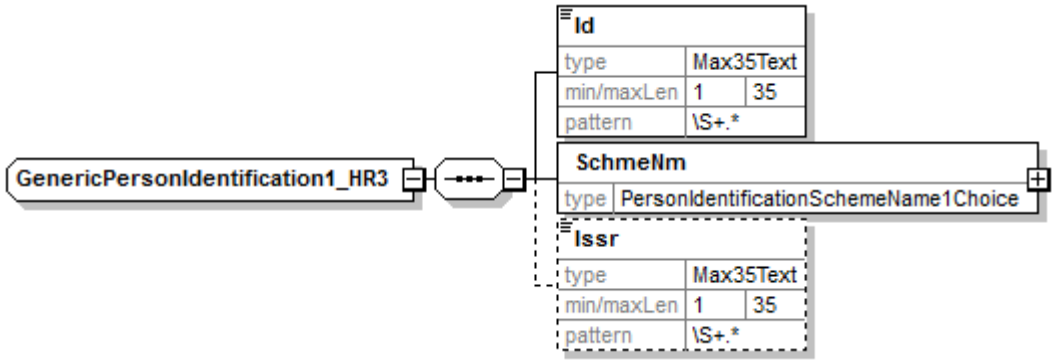
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id** **SchmeNm** **Issr**
used by	elements **PersonIdentification5_HR3/Othr** **PersonIdentification5_HR5/Othr**
source	<xs:complexType name="GenericPersonIdentification1_HR3">\ <xs:sequence>\ <xs:element name="Id" type="Max35Text"/>\ <xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice" maxOccurs="1"/>\ <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>\ </xs:sequence>\ </xs:complexType>

element **GenericPersonIdentification1_HR3/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

element **GenericPersonIdentification1_HR3/SchmeNm**

diagram	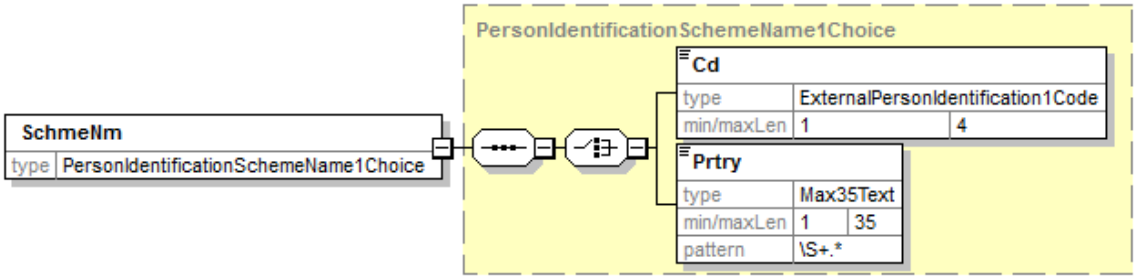
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentificationSchemeName1Choice**
properties	content complex
children	**Cd** **Prtry**
source	<xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice" maxOccurs="1"/>

element **GenericPersonIdentification1_HR3/Issr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation

	minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>

complexType **GenericPersonIdentification1_HR4**

diagram	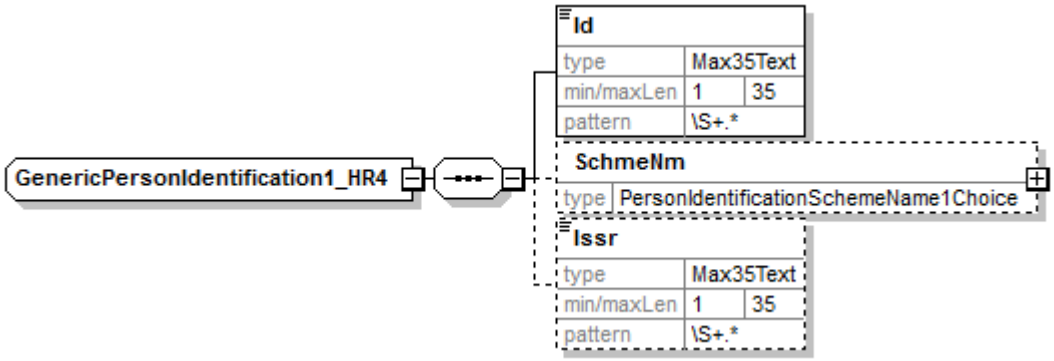
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id** **SchmeNm** **Issr**
used by	element **PersonIdentification5_HR4/Othr**
source	<xs:complexType name="GenericPersonIdentification1_HR4"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> <xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice" minOccurs="0" maxOccurs="1"/> <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **GenericPersonIdentification1_HR4/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

element **GenericPersonIdentification1_HR4/SchmeNm**

diagram	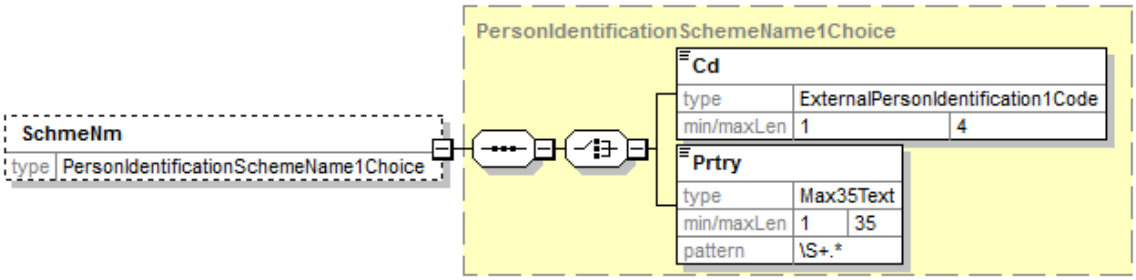
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentificationSchemeName1Choice**
properties	minOcc 0 maxOcc 1 content complex
children	**Cd** **Prtry**
source	<xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice" minOccurs="0" maxOccurs="1"/>

element **GenericPersonIdentification1_HR4/Issr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>

complexType **GroupHeader36_HR**

diagram	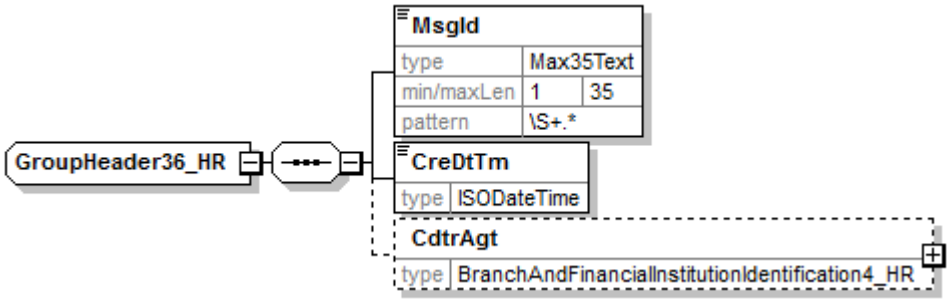
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**MsgId** **CreDtTm** **CdtrAgt**
used by	element **CustomerPaymentStatusReportV03/GrpHdr**
source	<xs:complexType name="GroupHeader36_HR"> <xs:sequence> <xs:element name="MsgId" type="Max35Text"/> <xs:element name="CreDtTm" type="ISODateTime"/> <xs:element name="CdtrAgt" type="BranchAndFinancialInstitutionIdentification4_HR" minOccurs="0"/> </xs:sequence> </xs:complexType>

element **GroupHeader36_HR/MsgId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="MsgId" type="Max35Text"/>

element **GroupHeader36_HR/CreDtTm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ISODateTime**

properties	content simple
source	<xs:element name="CreDtTm" type="ISODateTime"/>

element **GroupHeader36_HR/CdtrAgt**

diagram	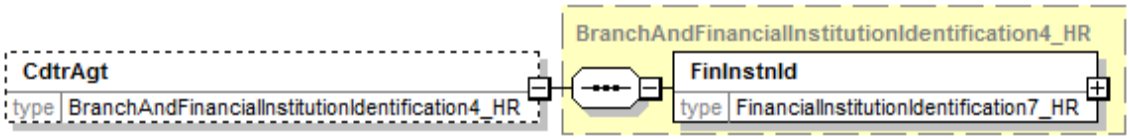
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**BranchAndFinancialInstitutionIdentification4_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**FinInstnId**
source	<xs:element name="CdtrAgt" type="BranchAndFinancialInstitutionIdentification4_HR" minOccurs="0"/>

complexType **LocalInstrument2Choice_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Cd**
used by	element **PaymentTypeInformation22_HR/LclInstrm**
source	<xs:complexType name="LocalInstrument2Choice_HR"> <xs:sequence> <xs:element name="Cd" type="ExternalLocalInstrument1Code"/> </xs:sequence> </xs:complexType>

element **LocalInstrument2Choice_HR/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ExternalLocalInstrument1Code**
properties	content simple
facets	Kind Value Annotation minLength 1

	maxLength 35
source	<xs:element name="Cd" type="ExternalLocalInstrument1Code"/>

complexType **MandateRelatedInformation6_HR**

diagram	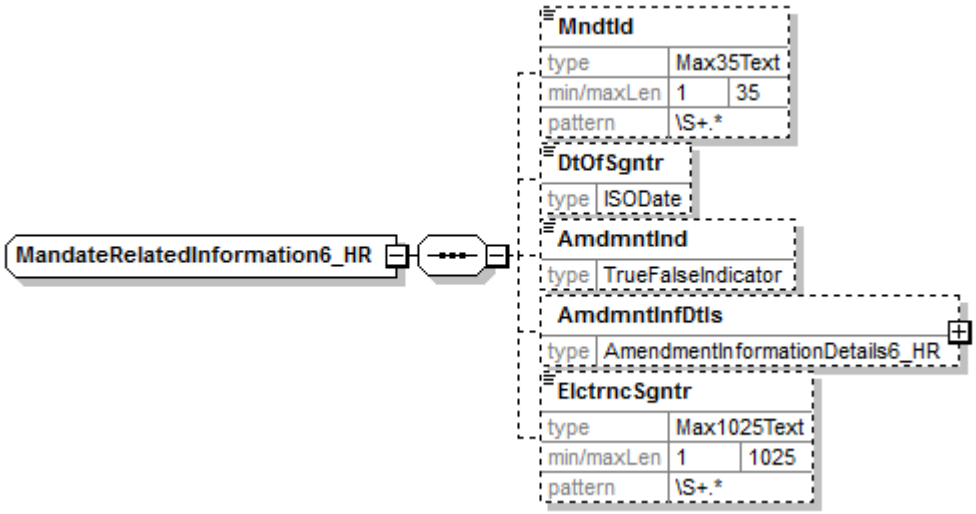
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**MndtId** **DtOfSgntr** **AmdmntInd** **AmdmntInfDtls** **ElctrncSgntr**
used by	element **OriginalTransactionReference13_HR/MndtRltdInf**
source	<xs:complexType name="MandateRelatedInformation6_HR"> <xs:sequence> <xs:element name="MndtId" type="Max35Text" minOccurs="0" maxOccurs="1"/> <xs:element name="DtOfSgntr" type="ISODate" minOccurs="0" maxOccurs="1"/> <xs:element name="AmdmntInd" type="TrueFalseIndicator" minOccurs="0" maxOccurs="1"/> <xs:element name="AmdmntInfDtls" type="AmendmentInformationDetails6_HR" minOccurs="0" maxOccurs="1"/> <xs:element name="ElctrncSgntr" type="Max1025Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **MandateRelatedInformation6_HR/MndtId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1

	maxLength 35 pattern \S+.*
source	<xs:element name="MndtId" type="Max35Text" minOccurs="0" maxOccurs="1"/>

element **MandateRelatedInformation6_HR/DtOfSgntr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ISODate**
properties	minOcc 0 maxOcc 1 content simple
source	<xs:element name="DtOfSgntr" type="ISODate" minOccurs="0" maxOccurs="1"/>

element **MandateRelatedInformation6_HR/AmdmntInd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**TrueFalseIndicator**
properties	minOcc 0 maxOcc 1 content simple
source	<xs:element name="AmdmntInd" type="TrueFalseIndicator" minOccurs="0" maxOccurs="1"/>

element **MandateRelatedInformation6_HR/AmdmntInfDtls**

diagram	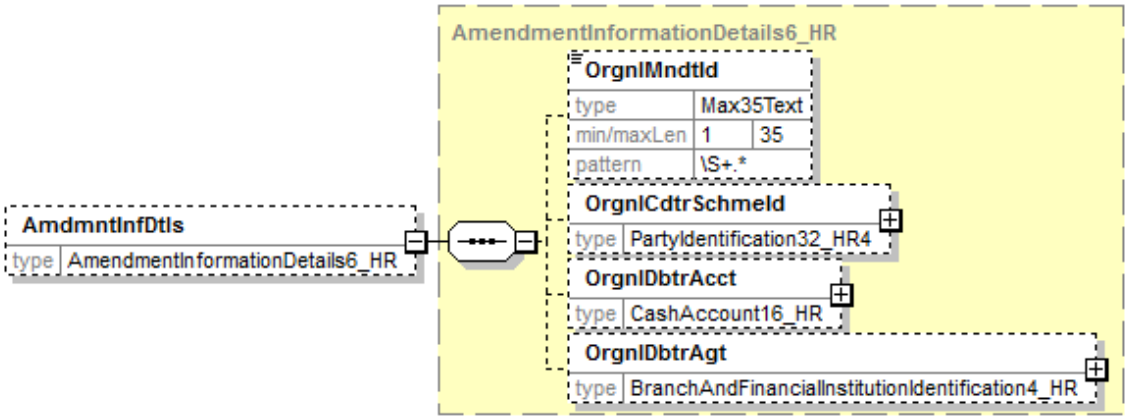
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AmendmentInformationDetails6_HR**
properties	minOcc 0 maxOcc 1

	content complex
children	**OrgnlMndtId** **OrgnlCdtrSchmeId** **OrgnlDbtrAcct** **OrgnlDbtrAgt**
source	<xs:element name="AmdmntInfDtls" type="AmendmentInformationDetails6_HR" minOccurs="0" maxOccurs="1"/>

element **MandateRelatedInformation6_HR/ElctrncSgntr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max1025Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 1025 pattern \S+.*
source	<xs:element name="ElctrncSgntr" type="Max1025Text" minOccurs="0" maxOccurs="1"/>

complexType **OrganisationIdentification4_HR**

diagram	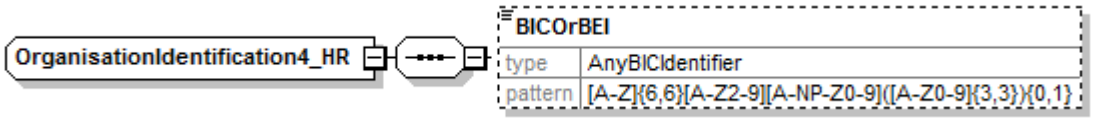
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**BICOrBEI**
used by	element **Party6Choice_HR/OrgId**
source	<xs:complexType name="OrganisationIdentification4_HR"> <xs:sequence> <xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **OrganisationIdentification4_HR/BICOrBEI**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AnyBICIdentifier**

properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/>

complexType **OrganisationIdentification4_HR1**

diagram	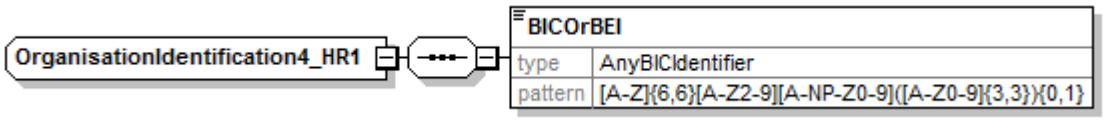
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**BICOrBEI**
used by	element **Party6Choice_HR1/OrgId**
source	<xs:complexType name="OrganisationIdentification4_HR1"> <xs:sequence> <xs:element name="BICOrBEI" type="AnyBICIdentifier"/> </xs:sequence> </xs:complexType>

element **OrganisationIdentification4_HR1/BICOrBEI**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AnyBICIdentifier**
properties	content simple
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:element name="BICOrBEI" type="AnyBICIdentifier"/>

complexType **OrganisationIdentification4_HR2**

diagram	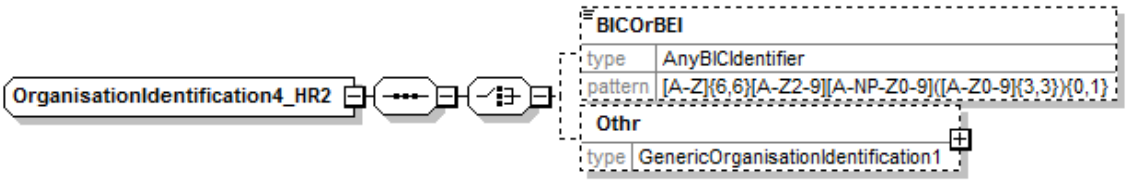
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**BICOrBEI** **Othr**
used by	elements **Party6Choice_HR4/OrgId** **Party6Choice_HR5/OrgId** **Party6Choice_HR6/OrgId**

source	<xs:complexType name="OrganisationIdentification4_HR2"> <xs:sequence> <xs:choice> <xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericOrganisationIdentification1" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:sequence> </xs:complexType>

element **OrganisationIdentification4_HR2/BICOrBEI**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AnyBICIdentifier**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/>

element **OrganisationIdentification4_HR2/Othr**

diagram	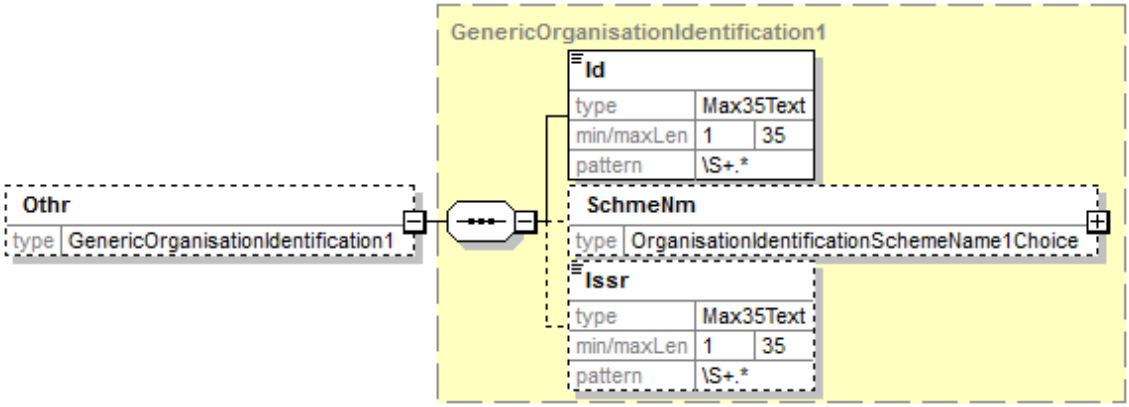
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericOrganisationIdentification1**
properties	minOcc 0 maxOcc 1 content complex
children	**Id** **SchmeNm** **Issr**
source	<xs:element name="Othr" type="GenericOrganisationIdentification1" minOccurs="0" maxOccurs="1"/>

complexType **OrganisationIdentification4_HR3**

diagram	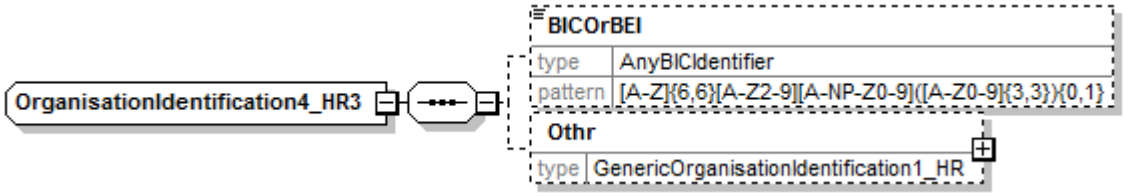
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**BICOrBEI** **Othr**
source	<xs:complexType name="OrganisationIdentification4_HR3"> <xs:sequence> <xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericOrganisationIdentification1_HR" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **OrganisationIdentification4_HR3/BICOrBEI**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AnyBICIdentifier**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/>

element **OrganisationIdentification4_HR3/Othr**

diagram	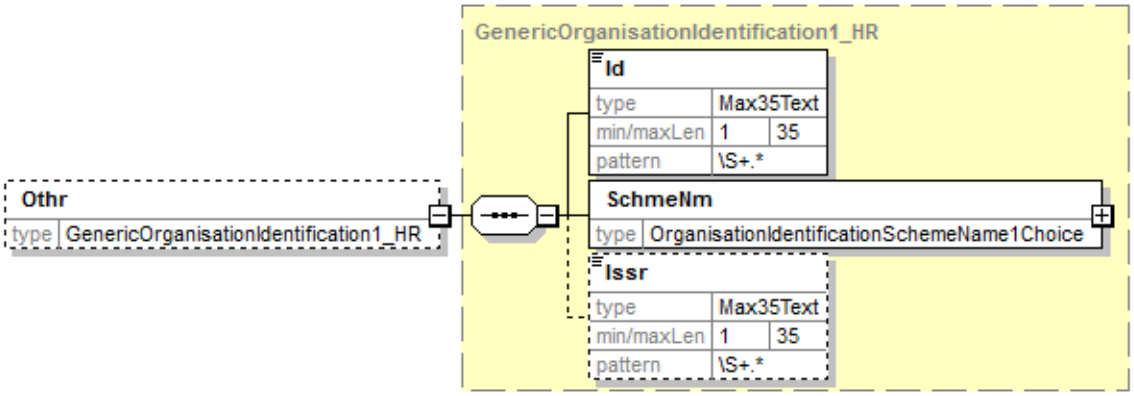

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericOrganisationIdentification1_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**Id** **SchmeNm** **Issr**
source	<xs:element name="Othr" type="GenericOrganisationIdentification1_HR" minOccurs="0" maxOccurs="1"/>

complexType **OrganisationIdentificationSchemeName1Choice**

diagram	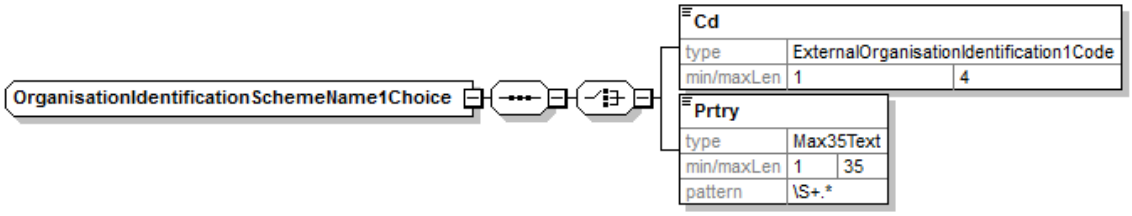
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Cd** **Prtry**
used by	elements **GenericOrganisationIdentification1/SchmeNm** **GenericOrganisationIdentification1_HR/SchmeNm**
source	<xs:complexType name="OrganisationIdentificationSchemeName1Choice"> <xs:sequence> <xs:choice> <xs:element name="Cd" type="ExternalOrganisationIdentification1Code"/> <xs:element name="Prtry" type="Max35Text"/> </xs:choice> </xs:sequence> </xs:complexType>

element **OrganisationIdentificationSchemeName1Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ExternalOrganisationIdentification1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4
source	<xs:element name="Cd" type="ExternalOrganisationIdentification1Code"/>

element **OrganisationIdentificationSchemeName1Choice/Prtry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Prtry" type="Max35Text"/>

complexType **OriginalGroupInformation20_HR**

diagram	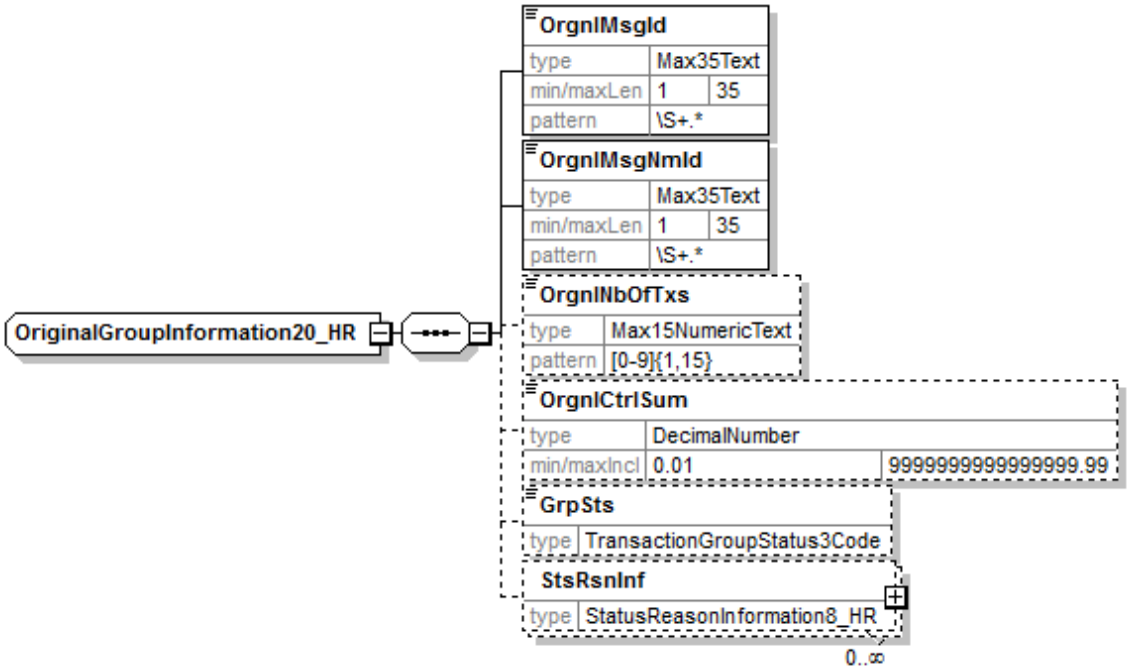
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**OrgnlMsgId** **OrgnlMsgNmId** **OrgnlNbOfTxs** **OrgnlCtrlSum** **GrpSts** **StsRsnInf**
used by	element **CustomerPaymentStatusReportV03/OrgnlGrpInfAndSts**
source	<xs:complexType name="OriginalGroupInformation20_HR"> <xs:sequence> <xs:element name="OrgnlMsgId" type="Max35Text"/> <xs:element name="OrgnlMsgNmId" type="Max35Text"/> <xs:element name="OrgnlNbOfTxs" type="Max15NumericText" minOccurs="0" maxOccurs="1"/> <xs:element name="OrgnlCtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>

```
    <xs:element name="GrpSts" type="TransactionGroupStatus3Code" minOccurs="0"/>
    <xs:element name="StsRsnInf" type="StatusReasonInformation8_HR" minOccurs="0"
maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

element **OriginalGroupInformation20_HR/OrgnlMsgId**

diagram	**OrgnlMsgId** type: Max35Text min/maxLen: 1 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="OrgnlMsgId" type="Max35Text"/>`

element **OriginalGroupInformation20_HR/OrgnlMsgNmId**

diagram	**OrgnlMsgNmId** type: Max35Text min/maxLen: 1 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="OrgnlMsgNmId" type="Max35Text"/>`

element **OriginalGroupInformation20_HR/OrgnlNbOfTxs**

diagram	**OrgnlNbOfTxs** type: Max15NumericText pattern: [0-9]{1,15}
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03

type	**Max15NumericText**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [0-9]{1,15}
source	<xs:element name="OrgnlNbOfTxs" type="Max15NumericText" minOccurs="0" maxOccurs="1"/>

element **OriginalGroupInformation20_HR/OrgnlCtrlSum**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**DecimalNumber**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 0.01 maxInclusive 9999999999999999.99 totalDigits 18 fractionDigits 2
source	<xs:element name="OrgnlCtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>

element **OriginalGroupInformation20_HR/GrpSts**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**TransactionGroupStatus3Code**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration RJCT
source	<xs:element name="GrpSts" type="TransactionGroupStatus3Code" minOccurs="0"/>

element **OriginalGroupInformation20_HR/StsRsnInf**

diagram	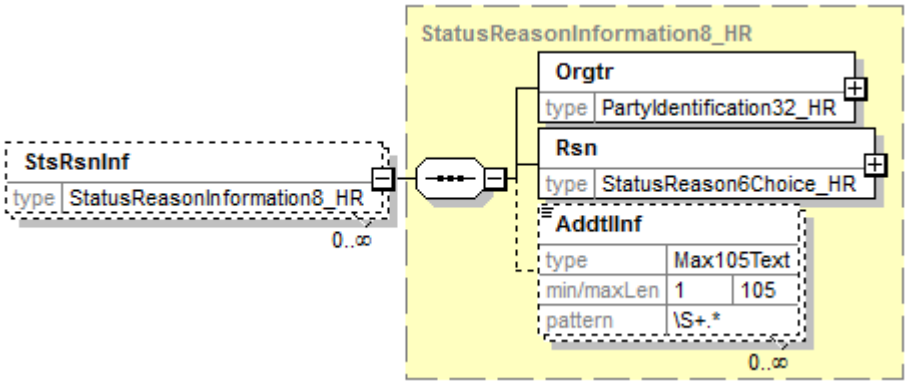
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**StatusReasonInformation8_HR**
properties	minOcc 0 maxOcc unbounded content complex
children	**Orgtr** **Rsn** **AddtlInf**
source	<xs:element name="StsRsnInf" type="StatusReasonInformation8_HR" minOccurs="0" maxOccurs="unbounded"/>

complexType **OriginalPaymentInformation1_HR**

diagram	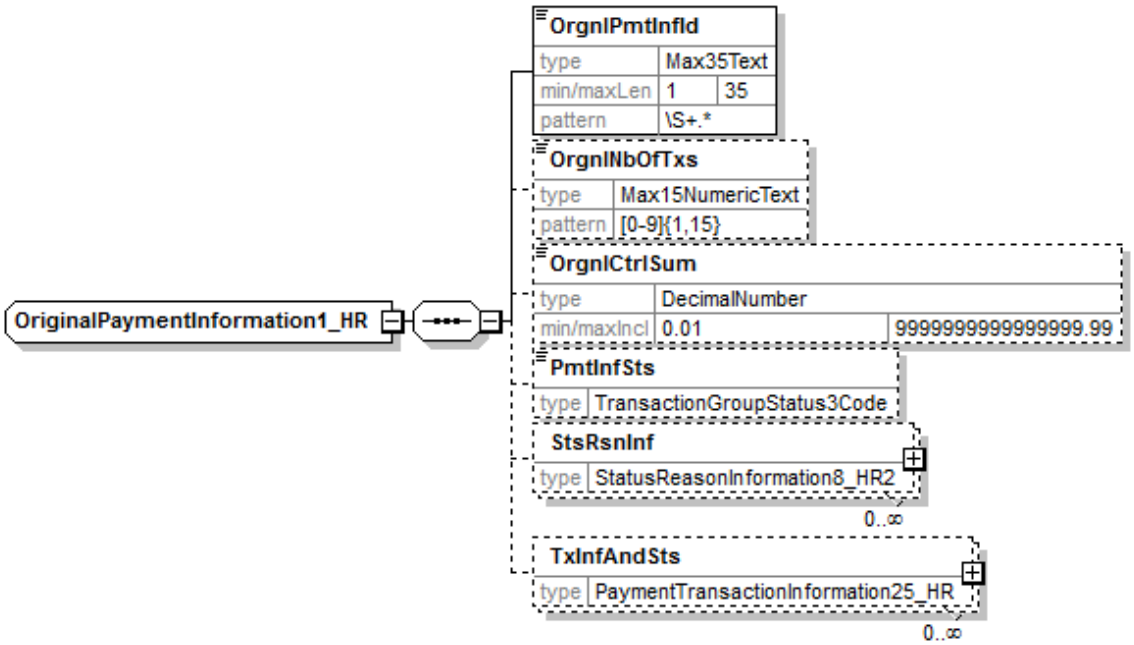
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**OrgnlPmtInfId** **OrgnlNbOfTxs** **OrgnlCtrlSum** **PmtInfSts** **StsRsnInf** **TxInfAndSts**
used by	element **CustomerPaymentStatusReportV03/OrgnlPmtInfAndSts**
source	<xs:complexType name="OriginalPaymentInformation1_HR">

```
  <xs:sequence>
    <xs:element name="OrgnlPmtInfId" type="Max35Text"/>
    <xs:element name="OrgnlNbOfTxs" type="Max15NumericText" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="OrgnlCtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>
    <xs:element name="PmtInfSts" type="TransactionGroupStatus3Code" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="StsRsnInf" type="StatusReasonInformation8_HR2" minOccurs="0"
maxOccurs="unbounded"/>
    <xs:element name="TxInfAndSts" type="PaymentTransactionInformation25_HR"
minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

element **OriginalPaymentInformation1_HR/OrgnlPmtInfId**

diagram	**OrgnlPmtInfId** type: Max35Text min/maxLen: 1 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="OrgnlPmtInfId" type="Max35Text"/>`

element **OriginalPaymentInformation1_HR/OrgnlNbOfTxs**

diagram	**OrgnlNbOfTxs** type: Max15NumericText pattern: [0-9]{1,15}
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max15NumericText**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation pattern [0-9]{1,15}
source	`<xs:element name="OrgnlNbOfTxs" type="Max15NumericText" minOccurs="0" maxOccurs="1"/>`

element **OriginalPaymentInformation1_HR/OrgnlCtrlSum**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**DecimalNumber**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minInclusive 0.01 maxInclusive 9999999999999999.99 totalDigits 18 fractionDigits 2
source	<xs:element name="OrgnlCtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>

element **OriginalPaymentInformation1_HR/PmtInfSts**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**TransactionGroupStatus3Code**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation enumeration RJCT
source	<xs:element name="PmtInfSts" type="TransactionGroupStatus3Code" minOccurs="0" maxOccurs="1"/>

element **OriginalPaymentInformation1_HR/StsRsnInf**

diagram	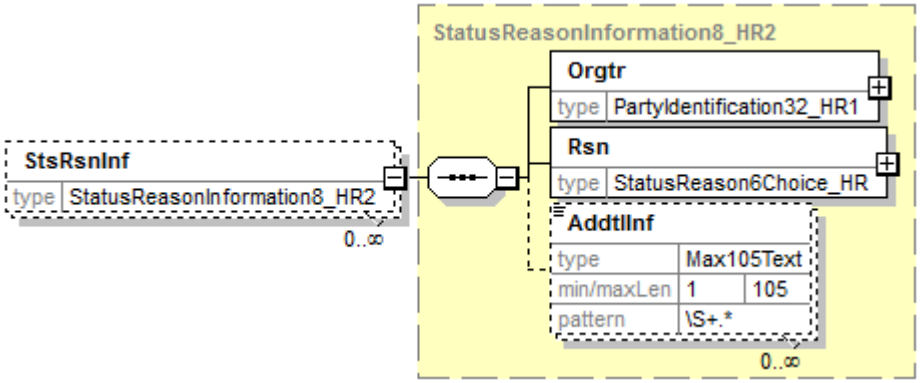
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**StatusReasonInformation8_HR2**

properties	minOcc 0 maxOcc unbounded content complex
children	**Orgtr** **Rsn** **AddtlInf**
source	<xs:element name="StsRsnInf" type="StatusReasonInformation8_HR2" minOccurs="0" maxOccurs="unbounded"/>

element **OriginalPaymentInformation1_HR/TxInfAndSts**

diagram	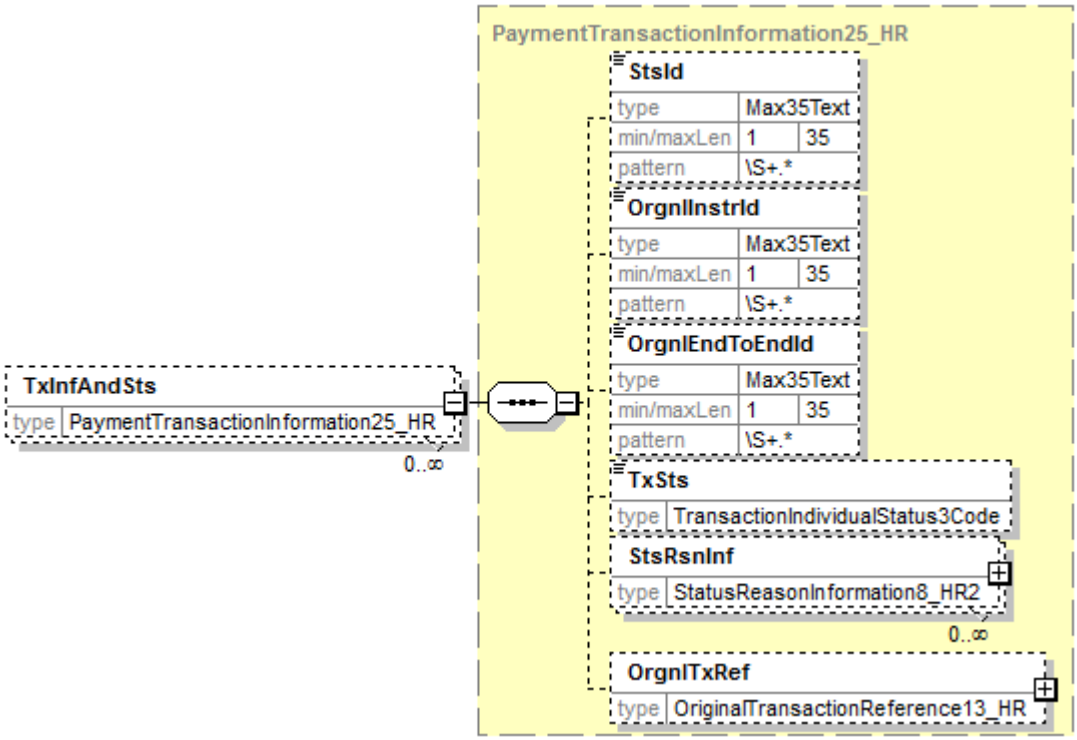
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PaymentTransactionInformation25_HR**
properties	minOcc 0 maxOcc unbounded content complex
children	**StsId** **OrgnlInstrId** **OrgnlEndToEndId** **TxSts** **StsRsnInf** **OrgnlTxRef**
source	<xs:element name="TxInfAndSts" type="PaymentTransactionInformation25_HR" minOccurs="0" maxOccurs="unbounded"/>

complexType **OriginalTransactionReference13_HR**

diagram

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Amt** **ReqdColltnDt** **CdtrSchmeId** **PmtTpInf** **PmtMtd** **MndtRltdInf** **RmtInf** **UltmtDbtr** **Dbtr** **DbtrAcct** **DbtrAgt** **CdtrAgt** **Cdtr** **CdtrAcct** **UltmtCdtr**
used by	element **PaymentTransactionInformation25_HR/OrgnlTxRef**

source

```
<xs:complexType name="OriginalTransactionReference13_HR">
  <xs:sequence>
    <xs:element name="Amt" type="AmountType3Choice_HR" minOccurs="0" maxOccurs="1"/>
    <xs:element name="ReqdColltnDt" type="ISODate" minOccurs="0" maxOccurs="1"/>
    <xs:element name="CdtrSchmeId" type="PartyIdentification32_HR3" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="PmtTpInf" type="PaymentTypeInformation22_HR" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="PmtMtd" type="PaymentMethod4Code" minOccurs="0" maxOccurs="1"/>
    <xs:element name="MndtRltdInf" type="MandateRelatedInformation6_HR" minOccurs="0"/>
    <xs:element name="RmtInf" type="RemittanceInformation5" minOccurs="0" maxOccurs="1"/>
```

```
    <xs:element name="UltmtDbtr" type="PartyIdentification32_HR5" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Dbtr" type="PartyIdentification32_HR6" minOccurs="0" maxOccurs="1"/>
    <xs:element name="DbtrAcct" type="CashAccount16_HR2" minOccurs="0" maxOccurs="1"/>
    <xs:element name="DbtrAgt" type="BranchAndFinancialInstitutionIdentification4_HR3" minOccurs="0" maxOccurs="1"/>
    <xs:element name="CdtrAgt" type="BranchAndFinancialInstitutionIdentification4_HR3" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Cdtr" type="PartyIdentification32_HR7" minOccurs="0" maxOccurs="1"/>
    <xs:element name="CdtrAcct" type="CashAccount16_HR3" minOccurs="0" maxOccurs="1"/>
    <xs:element name="UltmtCdtr" type="PartyIdentification32_HR5" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

element **OriginalTransactionReference13_HR/Amt**

diagram	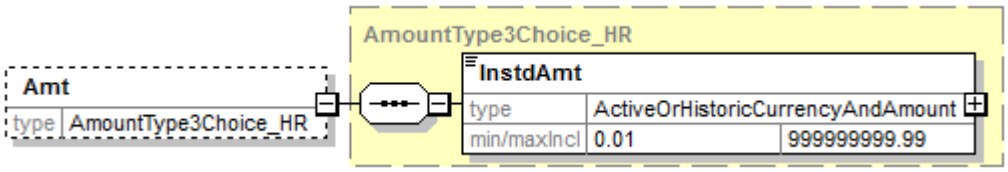
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**AmountType3Choice_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**InstdAmt**
source	`<xs:element name="Amt" type="AmountType3Choice_HR" minOccurs="0" maxOccurs="1"/>`

element **OriginalTransactionReference13_HR/ReqdColltnDt**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ISODate**
properties	minOcc 0 maxOcc 1 content simple
source	`<xs:element name="ReqdColltnDt" type="ISODate" minOccurs="0" maxOccurs="1"/>`

element **OriginalTransactionReference13_HR/CdtrSchmeId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PartyIdentification32_HR3**
properties	minOcc 0 maxOcc 1 content complex
children	**Id**
source	<xs:element name="CdtrSchmeId" type="PartyIdentification32_HR3" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/PmtTpInf**

diagram	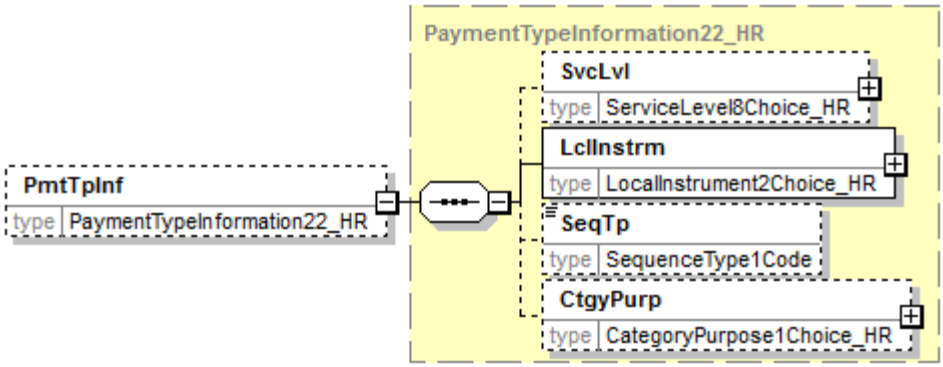
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PaymentTypeInformation22_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**SvcLvl** **LclInstrm** **SeqTp** **CtgyPurp**
source	<xs:element name="PmtTpInf" type="PaymentTypeInformation22_HR" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/PmtMtd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PaymentMethod4Code**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind: enumeration; Value: DD; Annotation:
source	<xs:element name="PmtMtd" type="PaymentMethod4Code" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/MndtRltdInf**

diagram	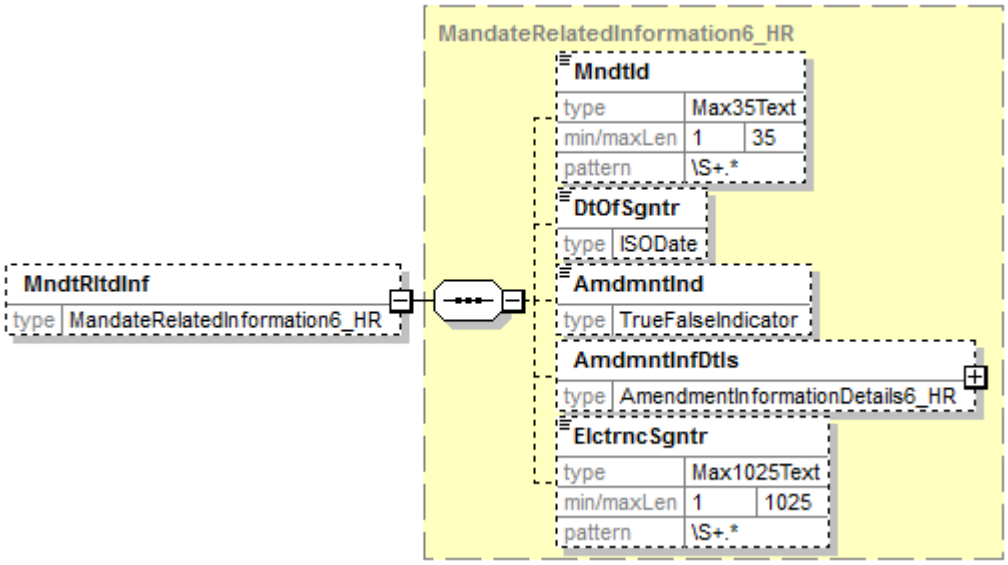
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**MandateRelatedInformation6_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**MndtId** **DtOfSgntr** **AmdmntInd** **AmdmntInfDtls** **ElctrncSgntr**
source	<xs:element name="MndtRltdInf" type="MandateRelatedInformation6_HR" minOccurs="0"/>

element **OriginalTransactionReference13_HR/RmtInf**

diagram	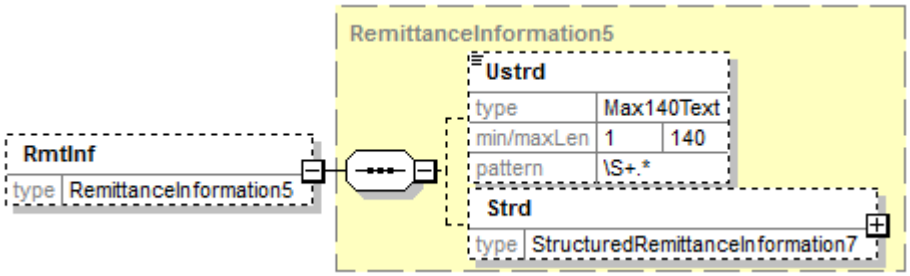
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**RemittanceInformation5**
properties	minOcc 0 maxOcc 1 content complex
children	**Ustrd** **Strd**

source	<xs:element name="RmtInf" type="RemittanceInformation5" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/UltmtDbtr**

diagram	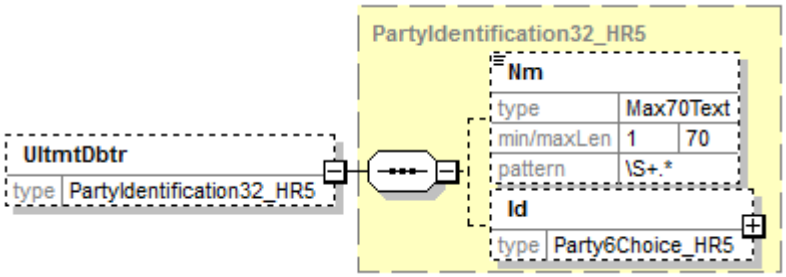
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PartyIdentification32_HR5**
properties	minOcc 0 maxOcc 1 content complex
children	**Nm** **Id**
source	<xs:element name="UltmtDbtr" type="PartyIdentification32_HR5" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/Dbtr**

diagram	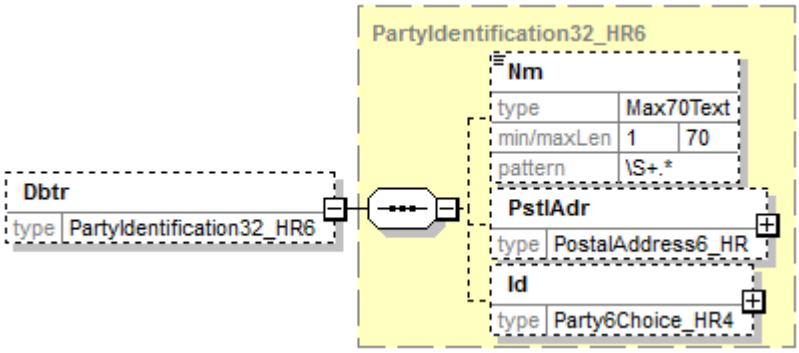
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PartyIdentification32_HR6**
properties	minOcc 0 maxOcc 1 content complex
children	**Nm** **PstlAdr** **Id**
source	<xs:element name="Dbtr" type="PartyIdentification32_HR6" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/DbtrAcct**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CashAccount16_HR2**
properties	minOcc 0 maxOcc 1 content complex
children	**Id**
source	<xs:element name="DbtrAcct" type="CashAccount16_HR2" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/DbtrAgt**

diagram	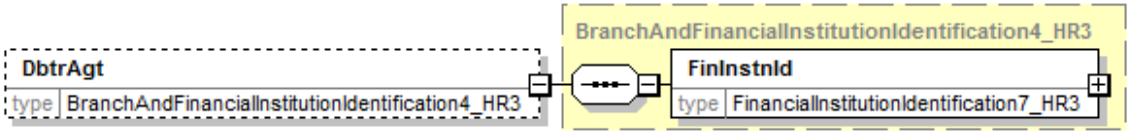
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**BranchAndFinancialInstitutionIdentification4_HR3**
properties	minOcc 0 maxOcc 1 content complex
children	**FinInstnId**
source	<xs:element name="DbtrAgt" type="BranchAndFinancialInstitutionIdentification4_HR3" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/CdtrAgt**

diagram	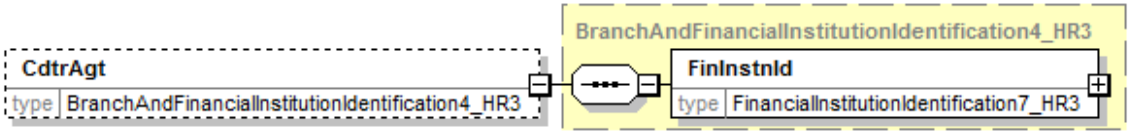
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**BranchAndFinancialInstitutionIdentification4_HR3**
properties	minOcc 0 maxOcc 1 content complex
children	**FinInstnId**
source	<xs:element name="CdtrAgt" type="BranchAndFinancialInstitutionIdentification4_HR3" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/Cdtr**

diagram	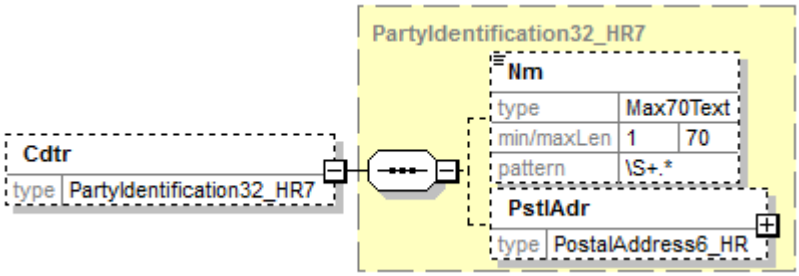
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PartyIdentification32_HR7**
properties	minOcc 0 maxOcc 1 content complex
children	**Nm** **PstlAdr**
source	<xs:element name="Cdtr" type="PartyIdentification32_HR7" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/CdtrAcct**

diagram	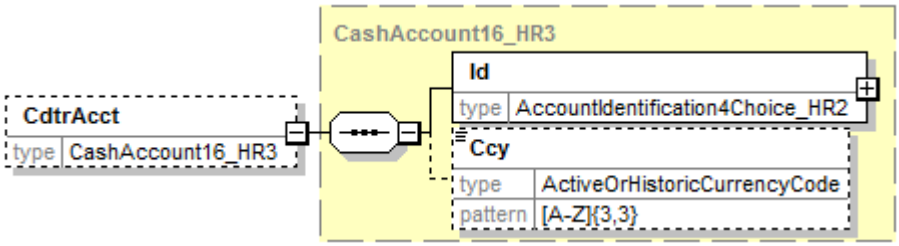
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CashAccount16_HR3**
properties	minOcc 0 maxOcc 1 content complex
children	**Id** **Ccy**
source	<xs:element name="CdtrAcct" type="CashAccount16_HR3" minOccurs="0" maxOccurs="1"/>

element **OriginalTransactionReference13_HR/UltmtCdtr**

diagram	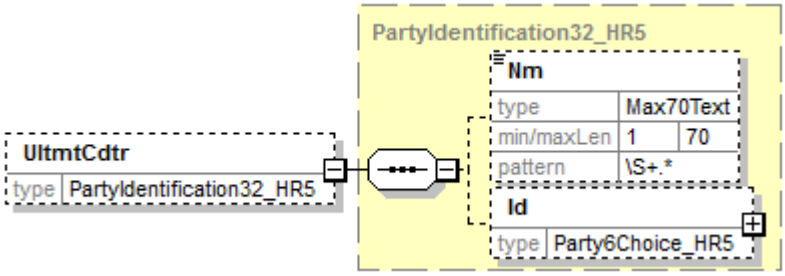
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03

type	**PartyIdentification32_HR5**
properties	minOcc 0 maxOcc 1 content complex
children	**Nm** **Id**
source	<xs:element name="UltmtCdtr" type="PartyIdentification32_HR5" minOccurs="0" maxOccurs="1"/>

complexType **Party6Choice_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**OrgId**
used by	element **PartyIdentification32_HR/Id**
source	<xs:complexType name="Party6Choice_HR"> <xs:sequence> <xs:element name="OrgId" type="OrganisationIdentification4_HR"/> </xs:sequence> </xs:complexType>

element **Party6Choice_HR/OrgId**

diagram	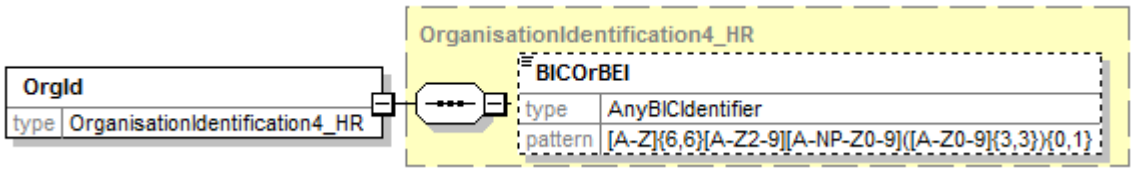
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OrganisationIdentification4_HR**
properties	content complex
children	**BICOrBEI**
source	<xs:element name="OrgId" type="OrganisationIdentification4_HR"/>

complexType **Party6Choice_HR1**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**OrgId**
used by	element **PartyIdentification32_HR1/Id**
source	<xs:complexType name="Party6Choice_HR1">

```
  <xs:sequence>
    <xs:element name="OrgId" type="OrganisationIdentification4_HR1"/>
  </xs:sequence>
</xs:complexType>
```

element **Party6Choice_HR1/OrgId**

diagram	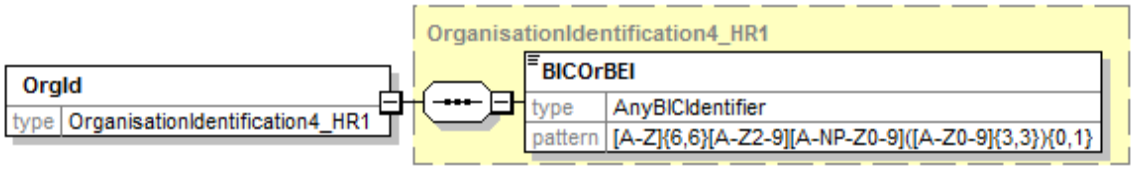
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OrganisationIdentification4_HR1**
properties	content complex
children	**BICOrBEI**
source	`<xs:element name="OrgId" type="OrganisationIdentification4_HR1"/>`

complexType **Party6Choice_HR2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**PrvtId**
used by	element **PartyIdentification32_HR3/Id**

source	`<xs:complexType name="Party6Choice_HR2">`
	`  <xs:sequence>`
	`  <xs:element name="PrvtId" type="PersonIdentification5_HR"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **Party6Choice_HR2/PrvtId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentification5_HR**
properties	content complex
children	**Othr**
source	`<xs:element name="PrvtId" type="PersonIdentification5_HR"/>`

complexType **Party6Choice_HR3**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**PrvtId**
used by	element **PartyIdentification32_HR4/Id**
source	<xs:complexType name="Party6Choice_HR3"> <xs:sequence> <xs:element name="PrvtId" type="PersonIdentification5_HR2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **Party6Choice_HR3/PrvtId**

diagram	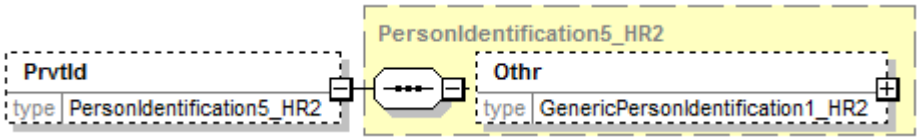
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentification5_HR2**
properties	minOcc 0 maxOcc 1 content complex
children	**Othr**
source	<xs:element name="PrvtId" type="PersonIdentification5_HR2" minOccurs="0" maxOccurs="1"/>

complexType **Party6Choice_HR4**

diagram	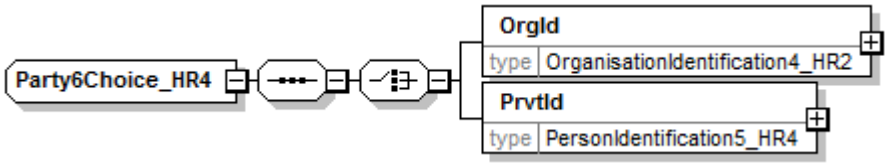
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**OrgId** **PrvtId**
used by	element **PartyIdentification32_HR6/Id**
source	<xs:complexType name="Party6Choice_HR4"> <xs:sequence> <xs:choice> <xs:element name="OrgId" type="OrganisationIdentification4_HR2"/> <xs:element name="PrvtId" type="PersonIdentification5_HR4"/>

```
    </xs:choice>
  </xs:sequence>
</xs:complexType>
```

element **Party6Choice_HR4/OrgId**

diagram	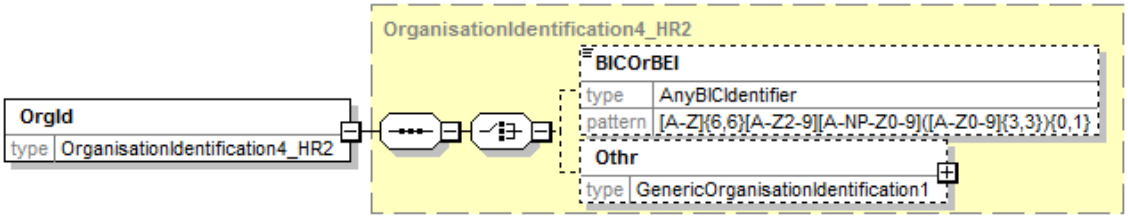
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OrganisationIdentification4_HR2**
properties	content complex
children	**BICOrBEI** **Othr**
source	<xs:element name="OrgId" type="OrganisationIdentification4_HR2"/>

element **Party6Choice_HR4/PrvtId**

diagram	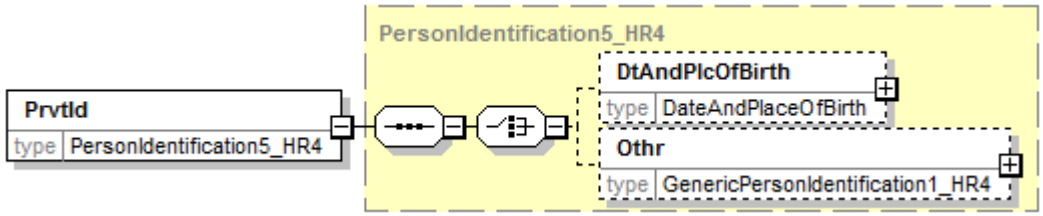
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentification5_HR4**
properties	content complex
children	**DtAndPlcOfBirth** **Othr**
source	<xs:element name="PrvtId" type="PersonIdentification5_HR4"/>

complexType **Party6Choice_HR5**

diagram	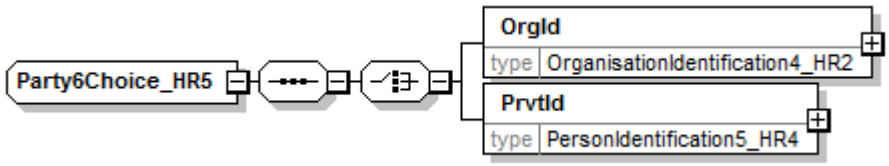
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**OrgId** **PrvtId**
used by	element **PartyIdentification32_HR5/Id**

source	<xs:complexType name="Party6Choice_HR5"> <xs:sequence> <xs:choice> <xs:element name="OrgId" type="OrganisationIdentification4_HR2"/> <xs:element name="PrvtId" type="PersonIdentification5_HR4"/> </xs:choice> </xs:sequence> </xs:complexType>

element **Party6Choice_HR5/OrgId**

diagram	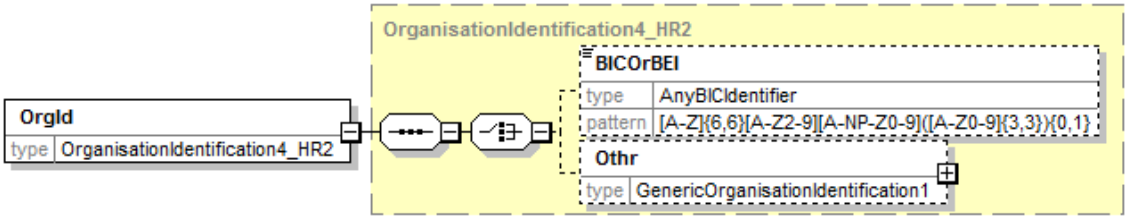
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OrganisationIdentification4_HR2**
properties	content complex
children	**BICOrBEI** **Othr**
source	<xs:element name="OrgId" type="OrganisationIdentification4_HR2"/>

element **Party6Choice_HR5/PrvtId**

diagram	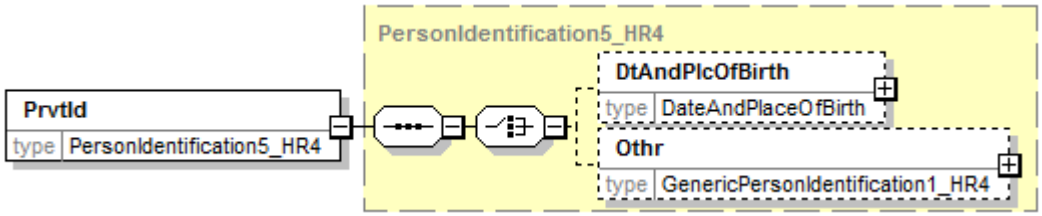
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentification5_HR4**
properties	content complex
children	**DtAndPlcOfBirth** **Othr**
source	<xs:element name="PrvtId" type="PersonIdentification5_HR4"/>

complexType **Party6Choice_HR6**

diagram	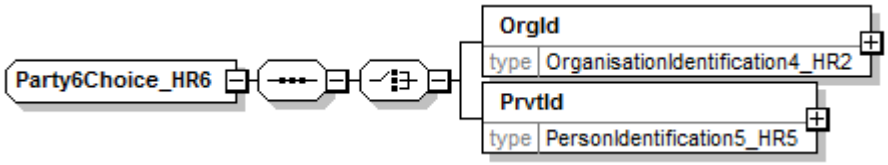
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**OrgId** **PrvtId**

source	`<xs:complexType name="Party6Choice_HR6">`
	`  <xs:sequence>`
	`  <xs:choice>`
	`  <xs:element name="OrgId" type="OrganisationIdentification4_HR2"/>`
	`  <xs:element name="PrvtId" type="PersonIdentification5_HR5"/>`
	`  </xs:choice>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **Party6Choice_HR6/OrgId**

diagram	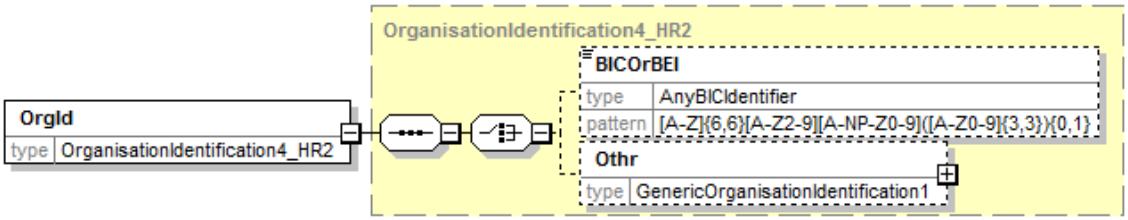
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OrganisationIdentification4_HR2**
properties	content complex
children	**BICOrBEI** **Othr**
source	`<xs:element name="OrgId" type="OrganisationIdentification4_HR2"/>`

element **Party6Choice_HR6/PrvtId**

diagram	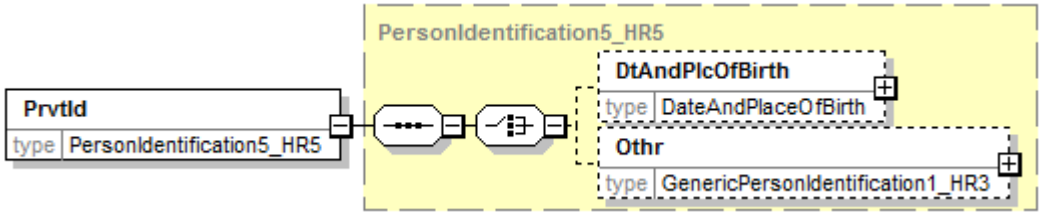
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PersonIdentification5_HR5**
properties	content complex
children	**DtAndPlcOfBirth** **Othr**

source	<xs:element name="PrvtId" type="PersonIdentification5_HR5"/>

complexType **PartyIdentification32_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id**
used by	element **StatusReasonInformation8_HR/Orgtr**
source	<xs:complexType name="PartyIdentification32_HR"> <xs:sequence> <xs:element name="Id" type="Party6Choice_HR" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_HR/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Party6Choice_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**OrgId**
source	<xs:element name="Id" type="Party6Choice_HR" minOccurs="0" maxOccurs="1"/>

complexType **PartyIdentification32_HR1**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id**
used by	element **StatusReasonInformation8_HR2/Orgtr**
source	<xs:complexType name="PartyIdentification32_HR1"> <xs:sequence> <xs:element name="Id" type="Party6Choice_HR1" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_HR1/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Party6Choice_HR1**
properties	minOcc 0 maxOcc 1 content complex
children	**OrgId**
source	<xs:element name="Id" type="Party6Choice_HR1" minOccurs="0" maxOccurs="1"/>

complexType **PartyIdentification32_HR3**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Id**
used by	element **OriginalTransactionReference13_HR/CdtrSchmeId**
source	<xs:complexType name="PartyIdentification32_HR3"> <xs:sequence> <xs:element name="Id" type="Party6Choice_HR2" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_HR3/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Party6Choice_HR2**
properties	content complex
children	**PrvtId**
source	<xs:element name="Id" type="Party6Choice_HR2" maxOccurs="1"/>

complexType **PartyIdentification32_HR4**

diagram	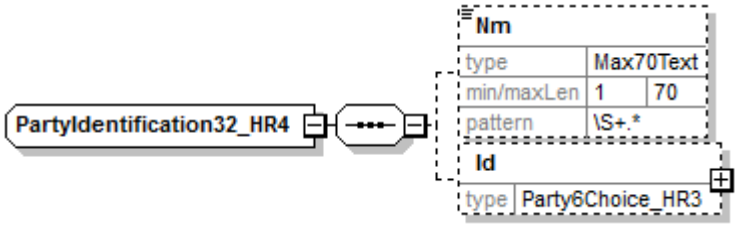
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Nm** **Id**
used by	element **AmendmentInformationDetails6_HR/OrgnlCdtrSchmeId**
source	<xs:complexType name="PartyIdentification32_HR4"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_HR3" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_HR4/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max70Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/>

element **PartyIdentification32_HR4/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Party6Choice_HR3**
properties	minOcc 0 maxOcc 1 content complex

children	**PrvtId**
source	<xs:element name="Id" type="Party6Choice_HR3" minOccurs="0" maxOccurs="1"/>

complexType **PartyIdentification32_HR5**

diagram	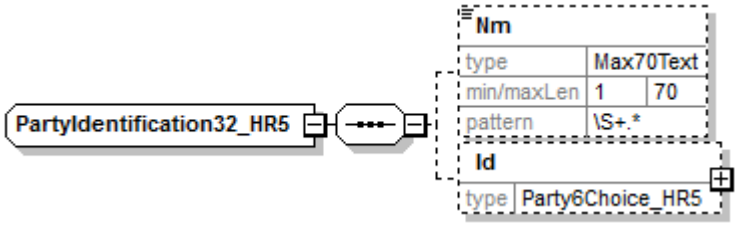
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Nm** **Id**
used by	elements **OriginalTransactionReference13_HR/UltmtCdtr** **OriginalTransactionReference13_HR/UltmtDbtr**
source	<xs:complexType name="PartyIdentification32_HR5"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_HR5" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_HR5/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max70Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/>

element **PartyIdentification32_HR5/Id**

diagram	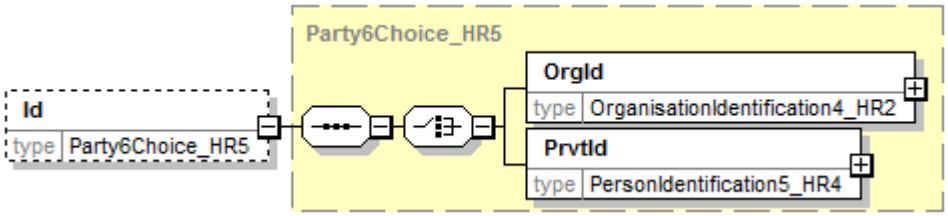
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Party6Choice_HR5**
properties	minOcc 0 maxOcc 1 content complex
children	**OrgId** **PrvtId**
source	<xs:element name="Id" type="Party6Choice_HR5" minOccurs="0" maxOccurs="1"/>

complexType **PartyIdentification32_HR6**

diagram	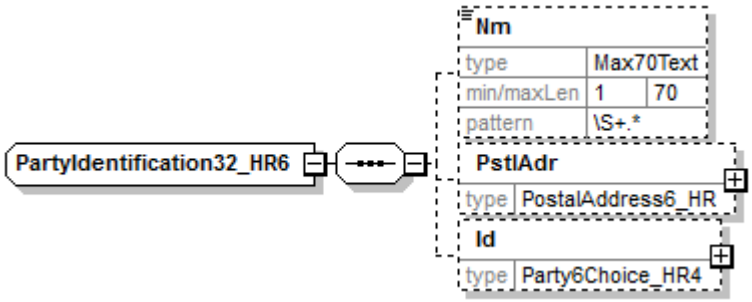
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Nm** **PstlAdr** **Id**
used by	element **OriginalTransactionReference13_HR/Dbtr**
source	<xs:complexType name="PartyIdentification32_HR6"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/> <xs:element name="PstlAdr" type="PostalAddress6_HR" minOccurs="0" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_HR4" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_HR6/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03

type	**Max70Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/>

element **PartyIdentification32_HR6/PstlAdr**

diagram	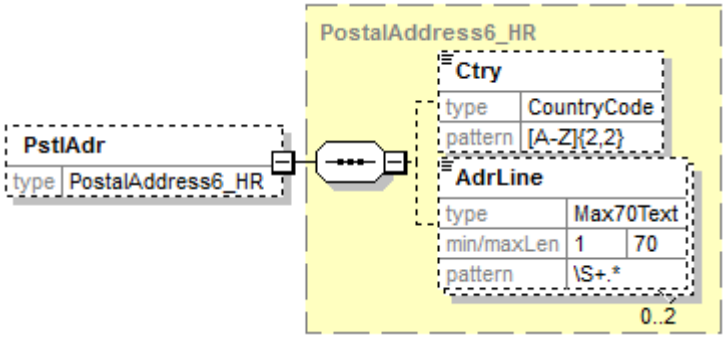
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PostalAddress6_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**Ctry** **AdrLine**
source	<xs:element name="PstlAdr" type="PostalAddress6_HR" minOccurs="0" maxOccurs="1"/>

element **PartyIdentification32_HR6/Id**

diagram	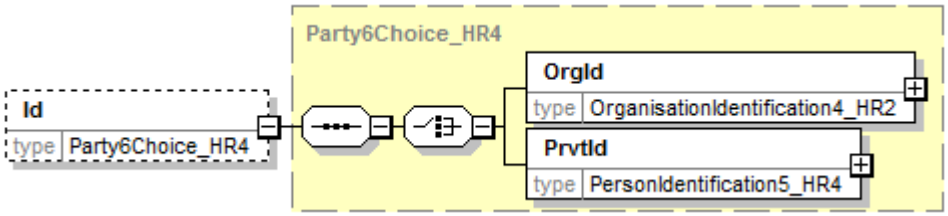
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Party6Choice_HR4**
properties	minOcc 0 maxOcc 1 content complex
children	**OrgId** **PrvtId**
source	<xs:element name="Id" type="Party6Choice_HR4" minOccurs="0" maxOccurs="1"/>

complexType **PartyIdentification32_HR7**

diagram	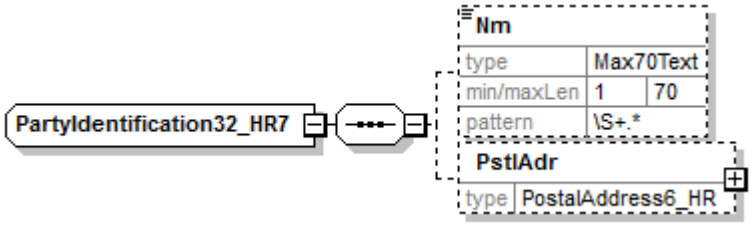
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Nm** **PstlAdr**
used by	element **OriginalTransactionReference13_HR/Cdtr**
source	<xs:complexType name="PartyIdentification32_HR7"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/> <xs:element name="PstlAdr" type="PostalAddress6_HR" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_HR7/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max70Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/>

element **PartyIdentification32_HR7/PstlAdr**

diagram	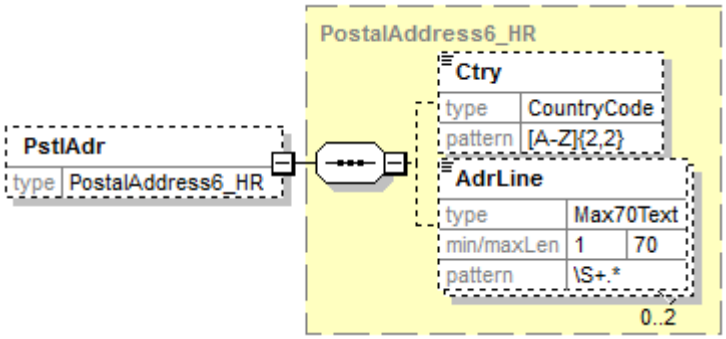
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PostalAddress6_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**Ctry** **AdrLine**
source	<xs:element name="PstlAdr" type="PostalAddress6_HR" minOccurs="0" maxOccurs="1"/>

complexType **PaymentTransactionInformation25_HR**

diagram	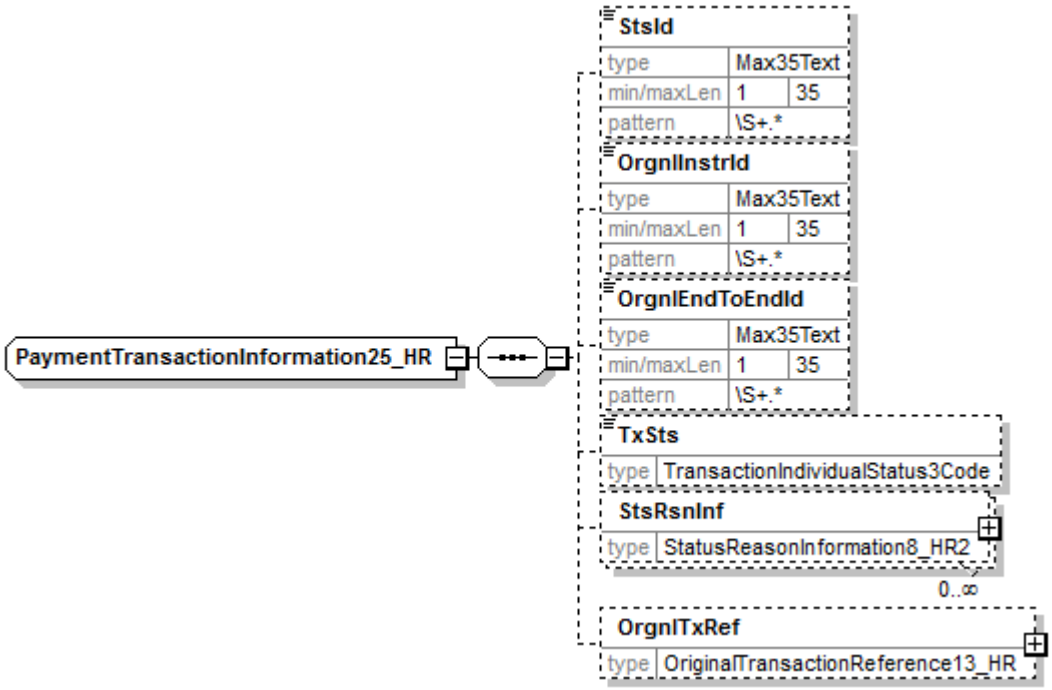
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**StsId** **OrgnlInstrId** **OrgnlEndToEndId** **TxSts** **StsRsnInf** **OrgnlTxRef**
used by	element **OriginalPaymentInformation1_HR/TxInfAndSts**
source	<xs:complexType name="PaymentTransactionInformation25_HR"> <xs:sequence>

```
    <xs:element name="StsId" type="Max35Text" minOccurs="0" maxOccurs="1"/>
    <xs:element name="OrgnlInstrId" type="Max35Text" minOccurs="0" maxOccurs="1"/>
    <xs:element name="OrgnlEndToEndId" type="Max35Text" minOccurs="0" maxOccurs="1"/>
    <xs:element name="TxSts" type="TransactionIndividualStatus3Code" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="StsRsnInf" type="StatusReasonInformation8_HR2" minOccurs="0"
maxOccurs="unbounded"/>
    <xs:element name="OrgnlTxRef" type="OriginalTransactionReference13_HR" minOccurs="0"
maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

element **PaymentTransactionInformation25_HR/StsId**

diagram	**StsId** type: Max35Text min/maxLen: 1 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="StsId" type="Max35Text" minOccurs="0" maxOccurs="1"/>`

element **PaymentTransactionInformation25_HR/OrgnlInstrId**

diagram	**OrgnlInstrId** type: Max35Text min/maxLen: 1 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="OrgnlInstrId" type="Max35Text" minOccurs="0" maxOccurs="1"/>`

element **PaymentTransactionInformation25_HR/OrgnlEndToEndId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="OrgnlEndToEndId" type="Max35Text" minOccurs="0" maxOccurs="1"/>

element **PaymentTransactionInformation25_HR/TxSts**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**TransactionIndividualStatus3Code**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration RJCT
source	<xs:element name="TxSts" type="TransactionIndividualStatus3Code" minOccurs="0" maxOccurs="1"/>

element **PaymentTransactionInformation25_HR/StsRsnInf**

diagram	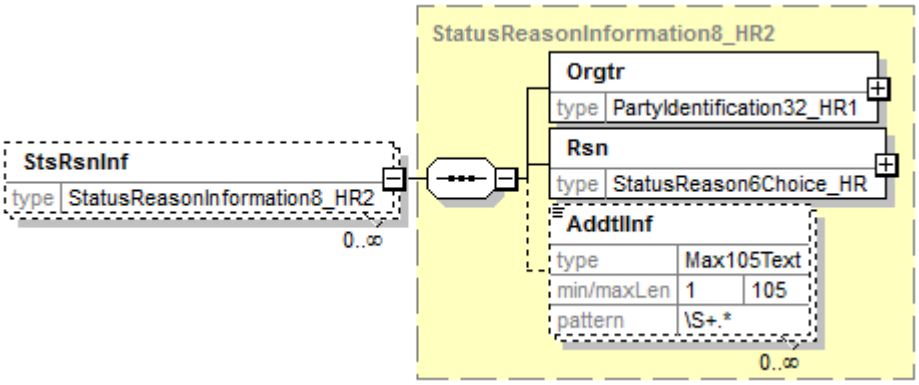
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**StatusReasonInformation8_HR2**

properties	minOcc 0 maxOcc unbounded content complex
children	**Orgtr** **Rsn** **AddtlInf**
source	<xs:element name="StsRsnInf" type="StatusReasonInformation8_HR2" minOccurs="0" maxOccurs="unbounded"/>

element **PaymentTransactionInformation25_HR/OrgnlTxRef**

diagram	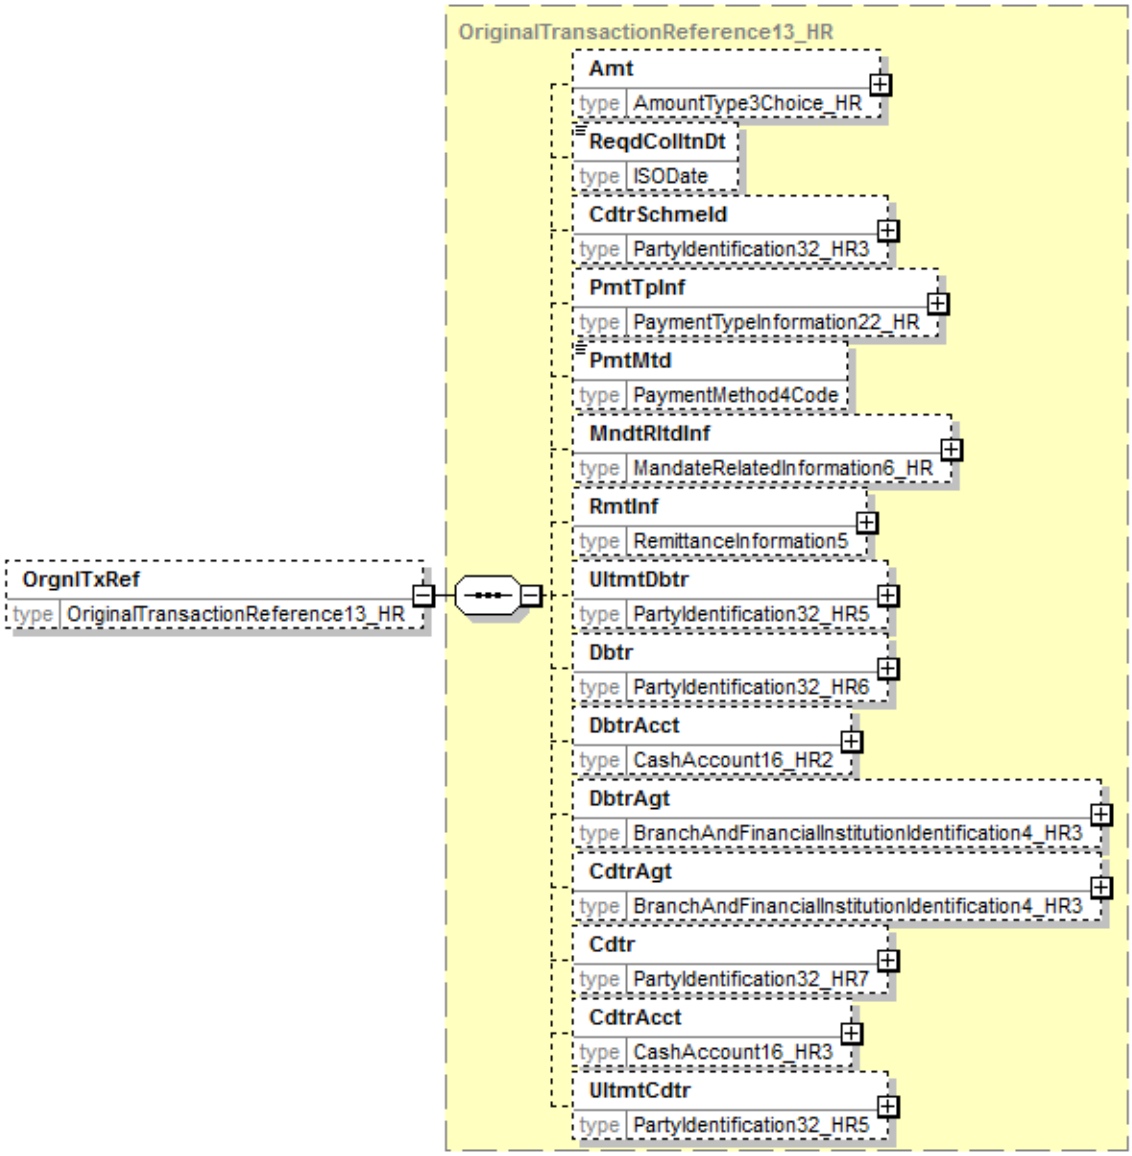
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**OriginalTransactionReference13_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**Amt** **ReqdColltnDt** **CdtrSchmeId** **PmtTpInf** **PmtMtd** **MndtRltdInf** **RmtInf** **UltmtDbtr** **Dbtr** **DbtrAcct** **DbtrAgt** **CdtrAgt**

	Cdtr **CdtrAcct** **UltmtCdtr**
source	<xs:element name="OrgnlTxRef" type="OriginalTransactionReference13_HR" minOccurs="0" maxOccurs="1"/>

complexType **PaymentTypeInformation22_HR**

diagram	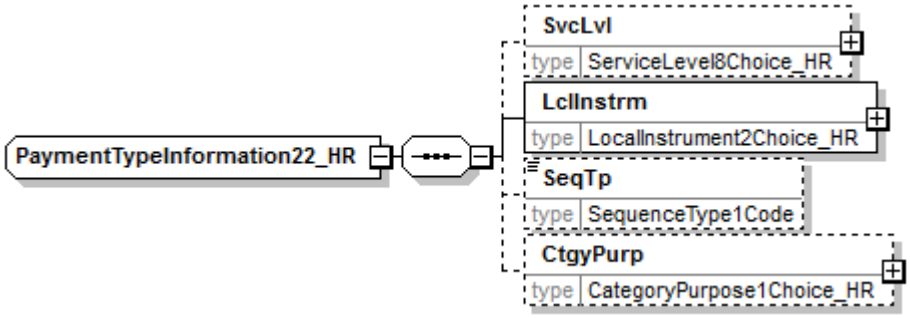
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**SvcLvl** **LclInstrm** **SeqTp** **CtgyPurp**
used by	element **OriginalTransactionReference13_HR/PmtTpInf**
source	<xs:complexType name="PaymentTypeInformation22_HR"> <xs:sequence> <xs:element name="SvcLvl" type="ServiceLevel8Choice_HR" minOccurs="0" maxOccurs="1"/> <xs:element name="LclInstrm" type="LocalInstrument2Choice_HR" maxOccurs="1"/> <xs:element name="SeqTp" type="SequenceType1Code" minOccurs="0" maxOccurs="1"/> <xs:element name="CtgyPurp" type="CategoryPurpose1Choice_HR" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PaymentTypeInformation22_HR/SvcLvl**

diagram	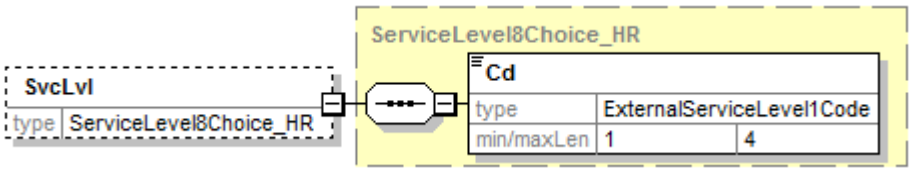
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ServiceLevel8Choice_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**Cd**
source	<xs:element name="SvcLvl" type="ServiceLevel8Choice_HR" minOccurs="0" maxOccurs="1"/>

element **PaymentTypeInformation22_HR/LclInstrm**

diagram	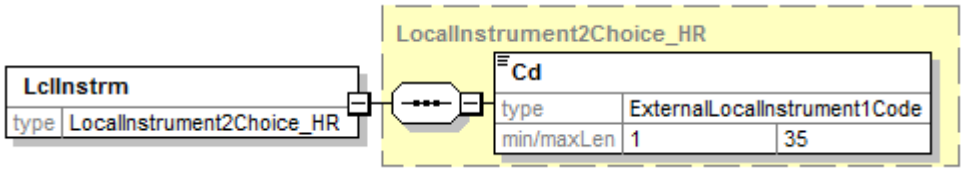
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**LocalInstrument2Choice_HR**
properties	content complex
children	**Cd**
source	<xs:element name="LclInstrm" type="LocalInstrument2Choice_HR" maxOccurs="1"/>

element **PaymentTypeInformation22_HR/SeqTp**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**SequenceType1Code**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation enumeration FRST enumeration RCUR enumeration FNAL enumeration OOFF
source	<xs:element name="SeqTp" type="SequenceType1Code" minOccurs="0" maxOccurs="1"/>

element **PaymentTypeInformation22_HR/CtgyPurp**

diagram	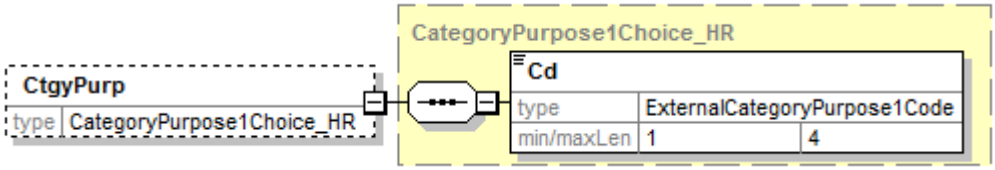
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CategoryPurpose1Choice_HR**
properties	minOcc 0 maxOcc 1 content complex
children	**Cd**
source	<xs:element name="CtgyPurp" type="CategoryPurpose1Choice_HR" minOccurs="0" maxOccurs="1"/>

complexType **PersonIdentification5_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Othr**
used by	element **Party6Choice_HR2/PrvtId**
source	<xs:complexType name="PersonIdentification5_HR"> <xs:sequence> <xs:element name="Othr" type="GenericPersonIdentification1_HR"/> </xs:sequence> </xs:complexType>

element **PersonIdentification5_HR/Othr**

diagram	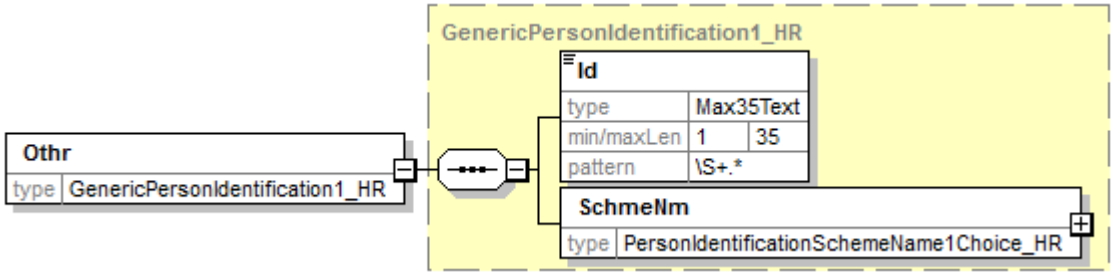
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericPersonIdentification1_HR**
properties	content complex
children	**Id** **SchmeNm**
source	<xs:element name="Othr" type="GenericPersonIdentification1_HR"/>

complexType **PersonIdentification5_HR2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Othr**
used by	element **Party6Choice_HR3/PrvtId**
source	<xs:complexType name="PersonIdentification5_HR2"> <xs:sequence> <xs:element name="Othr" type="GenericPersonIdentification1_HR2" minOccurs="0"/> </xs:sequence> </xs:complexType>

element **PersonIdentification5_HR2/Othr**

diagram	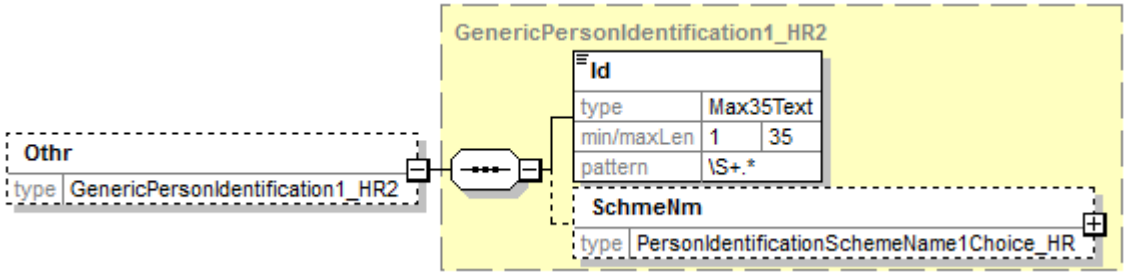
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericPersonIdentification1_HR2**
properties	minOcc 0 maxOcc 1 content complex
children	**Id** **SchmeNm**
source	<xs:element name="Othr" type="GenericPersonIdentification1_HR2" minOccurs="0"/>

complexType **PersonIdentification5_HR3**

diagram	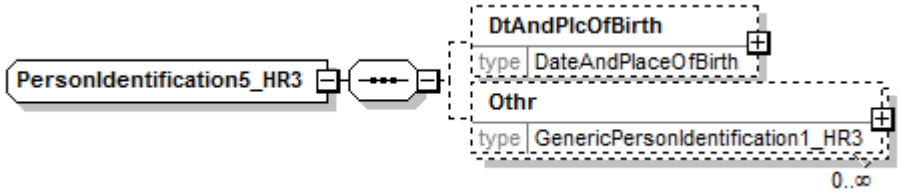
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**DtAndPlcOfBirth** **Othr**
source	<xs:complexType name="PersonIdentification5_HR3"> <xs:sequence> <xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericPersonIdentification1_HR3" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType>

element **PersonIdentification5_HR3/DtAndPlcOfBirth**

diagram	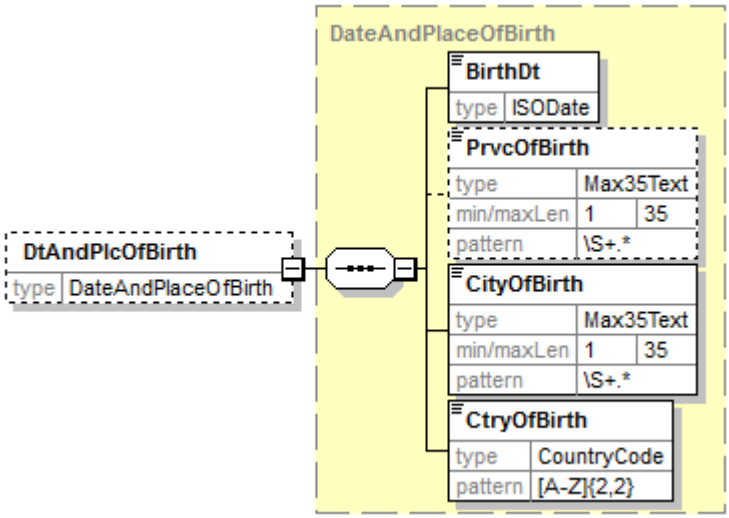
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**DateAndPlaceOfBirth**
properties	minOcc 0 maxOcc 1 content complex
children	**BirthDt** **PrvcOfBirth** **CityOfBirth** **CtryOfBirth**
source	<xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/>

element **PersonIdentification5_HR3/Othr**

diagram	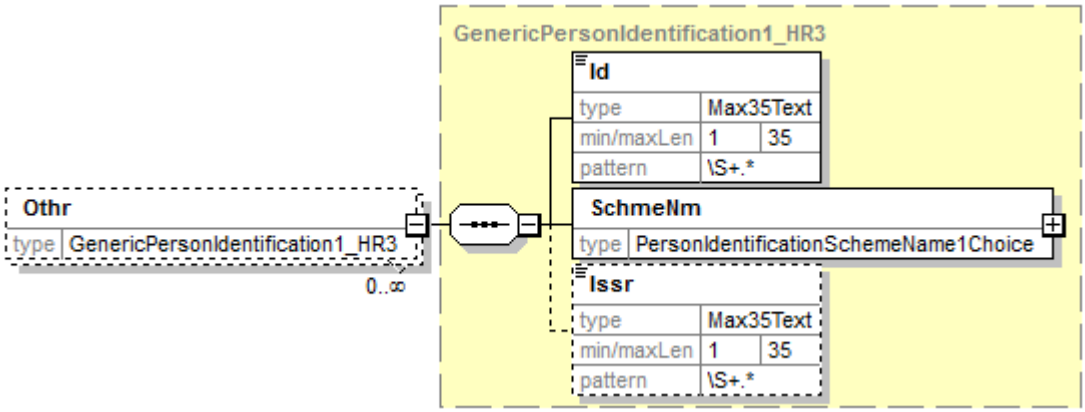
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericPersonIdentification1_HR3**
properties	minOcc 0 maxOcc unbounded content complex
children	**Id** **SchmeNm** **Issr**
source	<xs:element name="Othr" type="GenericPersonIdentification1_HR3" minOccurs="0" maxOccurs="unbounded"/>

complexType **PersonIdentification5_HR4**

diagram	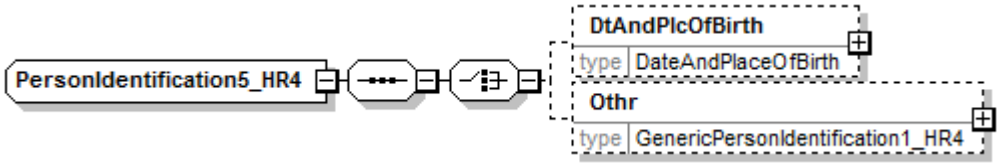
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**DtAndPlcOfBirth** **Othr**
used by	elements **Party6Choice_HR4/PrvtId** **Party6Choice_HR5/PrvtId**
source	<xs:complexType name="PersonIdentification5_HR4"> <xs:sequence> <xs:choice> <xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericPersonIdentification1_HR4" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:sequence> </xs:complexType>

element **PersonIdentification5_HR4/DtAndPlcOfBirth**

diagram	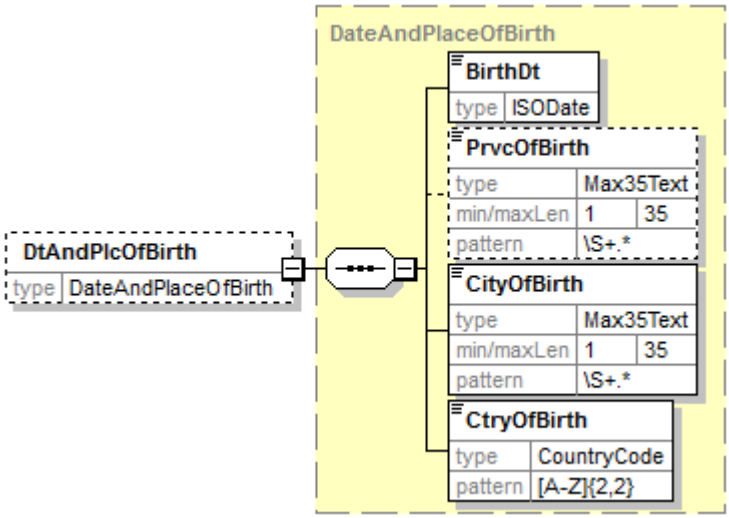
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**DateAndPlaceOfBirth**
properties	minOcc 0 maxOcc 1 content complex
children	**BirthDt** **PrvcOfBirth** **CityOfBirth** **CtryOfBirth**
source	<xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/>

element **PersonIdentification5_HR4/Othr**

diagram	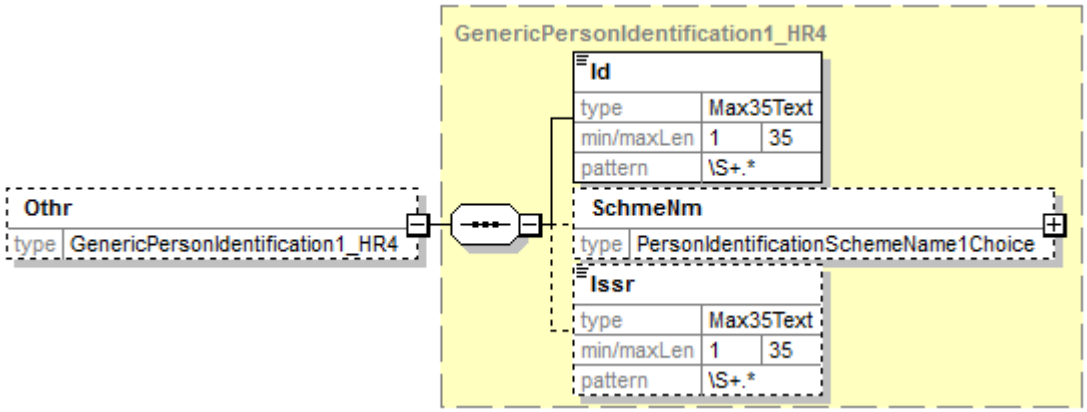
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericPersonIdentification1_HR4**
properties	minOcc 0 maxOcc 1 content complex
children	**Id** **SchmeNm** **Issr**
source	<xs:element name="Othr" type="GenericPersonIdentification1_HR4" minOccurs="0" maxOccurs="1"/>

complexType **PersonIdentification5_HR5**

diagram	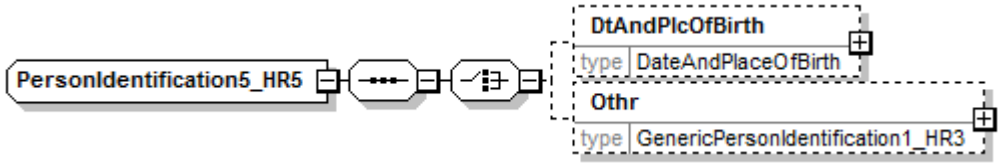
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**DtAndPlcOfBirth** **Othr**
used by	element **Party6Choice_HR6/PrvtId**
source	<xs:complexType name="PersonIdentification5_HR5"> <xs:sequence> <xs:choice> <xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericPersonIdentification1_HR3" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:sequence> </xs:complexType>

element **PersonIdentification5_HR5/DtAndPlcOfBirth**

diagram	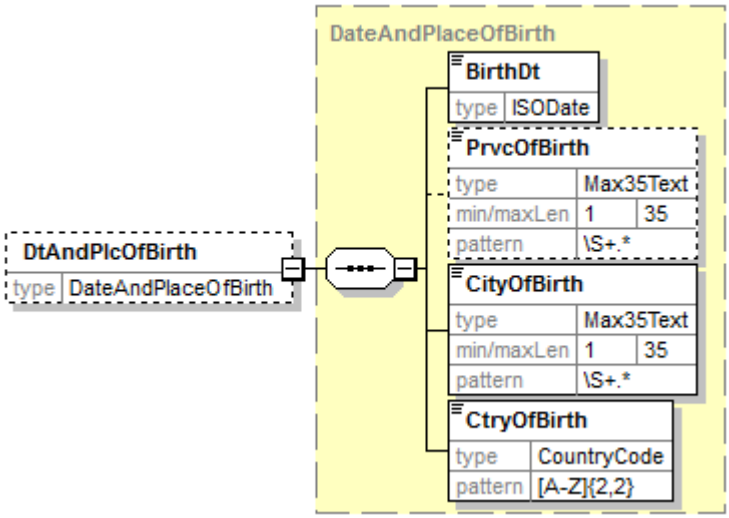
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**DateAndPlaceOfBirth**
properties	minOcc 0 maxOcc 1 content complex
children	**BirthDt** **PrvcOfBirth** **CityOfBirth** **CtryOfBirth**
source	<xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/>

element **PersonIdentification5_HR5/Othr**

diagram	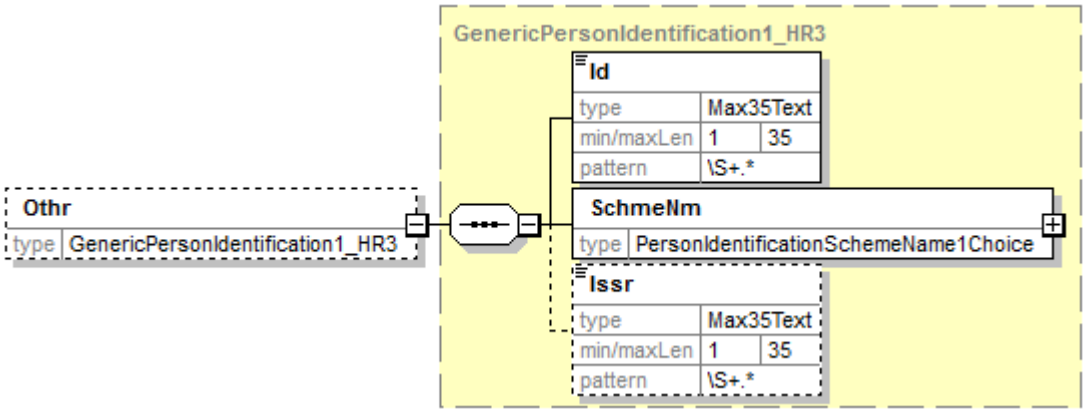
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**GenericPersonIdentification1_HR3**
properties	minOcc 0 maxOcc 1 content complex
children	**Id** **SchmeNm** **Issr**
source	<xs:element name="Othr" type="GenericPersonIdentification1_HR3" minOccurs="0" maxOccurs="1"/>

complexType **PersonIdentificationSchemeName1Choice**

diagram	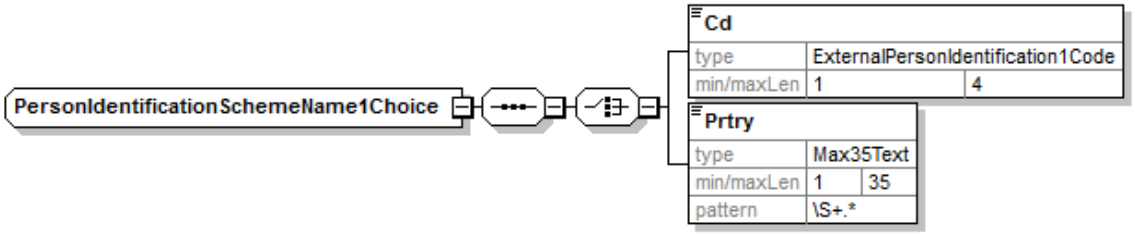
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Cd** **Prtry**
used by	elements **GenericPersonIdentification1_HR3/SchmeNm** **GenericPersonIdentification1_HR4/SchmeNm**

source	`<xs:complexType name="PersonIdentificationSchemeName1Choice">`
	`  <xs:sequence>`
	`  <xs:choice>`
	`  <xs:element name="Cd" type="ExternalPersonIdentification1Code"/>`
	`  <xs:element name="Prtry" type="Max35Text"/>`
	`  </xs:choice>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **PersonIdentificationSchemeName1Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ExternalPersonIdentification1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4
source	`<xs:element name="Cd" type="ExternalPersonIdentification1Code"/>`

element **PersonIdentificationSchemeName1Choice/Prtry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**

properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Prtry" type="Max35Text"/>

complexType **PersonIdentificationSchemeName1Choice_HR**

diagram	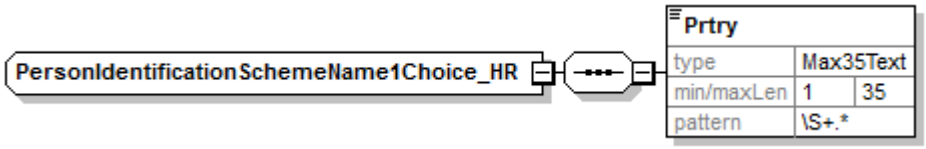
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Prtry**
used by	elements **GenericPersonIdentification1_HR/SchmeNm** **GenericPersonIdentification1_HR2/SchmeNm**
source	<xs:complexType name="PersonIdentificationSchemeName1Choice_HR"> <xs:sequence> <xs:element name="Prtry" type="Max35Text"/> </xs:sequence> </xs:complexType>

element **PersonIdentificationSchemeName1Choice_HR/Prtry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Prtry" type="Max35Text"/>

complexType **PostalAddress6_HR**

diagram	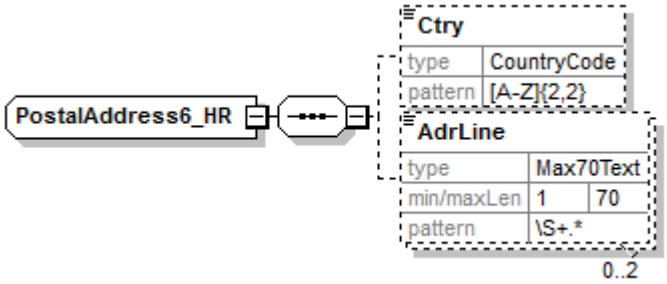
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Ctry** **AdrLine**
used by	elements **PartyIdentification32_HR6/PstlAdr** **PartyIdentification32_HR7/PstlAdr**

source	`<xs:complexType name="PostalAddress6_HR">`
	`  <xs:sequence>`
	`  <xs:element name="Ctry" type="CountryCode" minOccurs="0" maxOccurs="1"/>`
	`  <xs:element name="AdrLine" type="Max70Text" minOccurs="0" maxOccurs="2"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **PostalAddress6_HR/Ctry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CountryCode**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{2,2}
source	`<xs:element name="Ctry" type="CountryCode" minOccurs="0" maxOccurs="1"/>`

element **PostalAddress6_HR/AdrLine**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max70Text**
properties	minOcc 0 maxOcc 2 content simple

facets	Kind / Value / Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="AdrLine" type="Max70Text" minOccurs="0" maxOccurs="2"/>

complexType **RemittanceInformation5**

diagram	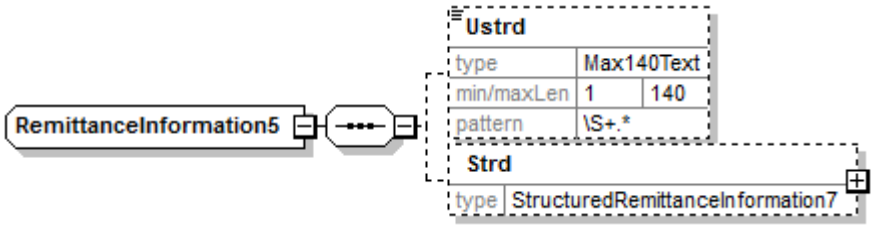
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Ustrd** **Strd**
used by	element **OriginalTransactionReference13_HR/RmtInf**
source	<xs:complexType name="RemittanceInformation5"> <xs:sequence> <xs:element name="Ustrd" type="Max140Text" minOccurs="0" maxOccurs="1"/> <xs:element name="Strd" type="StructuredRemittanceInformation7" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **RemittanceInformation5/Ustrd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max140Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 1 maxLength 140 pattern \S+.*
source	<xs:element name="Ustrd" type="Max140Text" minOccurs="0" maxOccurs="1"/>

element **RemittanceInformation5/Strd**

diagram	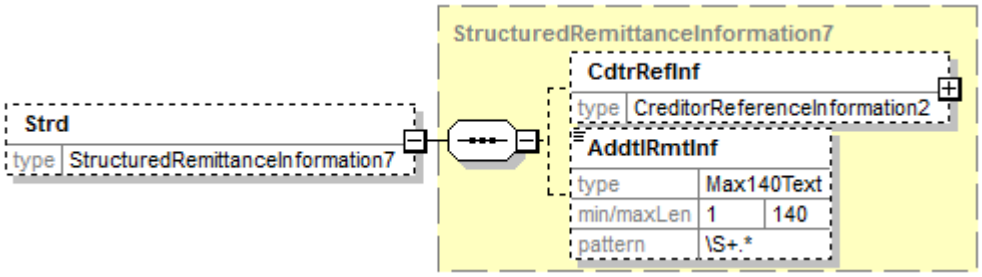
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**StructuredRemittanceInformation7**
properties	minOcc 0 maxOcc 1 content complex
children	**CdtrRefInf** **AddtlRmtInf**
source	<xs:element name="Strd" type="StructuredRemittanceInformation7" minOccurs="0" maxOccurs="1"/>

complexType **ServiceLevel8Choice_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Cd**
used by	element **PaymentTypeInformation22_HR/SvcLvl**
source	<xs:complexType name="ServiceLevel8Choice_HR"> <xs:sequence> <xs:element name="Cd" type="ExternalServiceLevel1Code"/> </xs:sequence> </xs:complexType>

element **ServiceLevel8Choice_HR/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ExternalServiceLevel1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4

source	<xs:element name="Cd" type="ExternalServiceLevel1Code"/>

complexType **StatusReason6Choice_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Cd**
used by	elements **StatusReasonInformation8_HR/Rsn** **StatusReasonInformation8_HR2/Rsn**
source	<xs:complexType name="StatusReason6Choice_HR"> <xs:sequence> <xs:element name="Cd" type="ExternalStatusReason1Code"/> </xs:sequence> </xs:complexType>

element **StatusReason6Choice_HR/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**ExternalStatusReason1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4
source	<xs:element name="Cd" type="ExternalStatusReason1Code"/>

complexType **StatusReasonInformation8_HR**

diagram	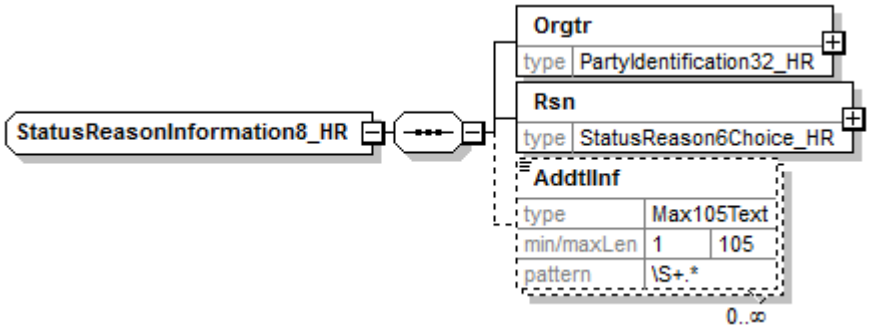
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03

children	**Orgtr** **Rsn** **AddtlInf**
used by	element **OriginalGroupInformation20_HR/StsRsnInf**
source	<xs:complexType name="StatusReasonInformation8_HR"> <xs:sequence> <xs:element name="Orgtr" type="PartyIdentification32_HR"/> <xs:element name="Rsn" type="StatusReason6Choice_HR"/> <xs:element name="AddtlInf" type="Max105Text" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType>

element **StatusReasonInformation8_HR/Orgtr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PartyIdentification32_HR**
properties	content complex
children	**Id**
source	<xs:element name="Orgtr" type="PartyIdentification32_HR"/>

element **StatusReasonInformation8_HR/Rsn**

diagram	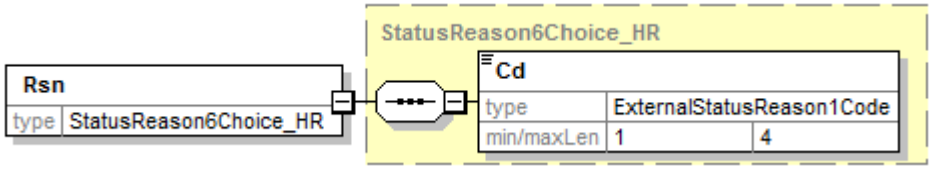
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**StatusReason6Choice_HR**
properties	content complex
children	**Cd**
source	<xs:element name="Rsn" type="StatusReason6Choice_HR"/>

element **StatusReasonInformation8_HR/AddtlInf**

diagram	

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max105Text**
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation minLength 1 maxLength 105 pattern \S+.*
source	<xs:element name="AddtlInf" type="Max105Text" minOccurs="0" maxOccurs="unbounded"/>

complexType **StatusReasonInformation8_HR2**

diagram	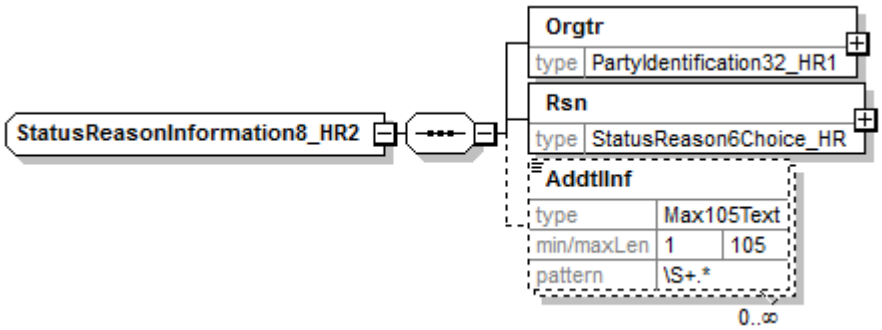
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**Orgtr** **Rsn** **AddtlInf**
used by	elements **OriginalPaymentInformation1_HR/StsRsnInf** **PaymentTransactionInformation25_HR/StsRsnInf**
source	<xs:complexType name="StatusReasonInformation8_HR2"> <xs:sequence> <xs:element name="Orgtr" type="PartyIdentification32_HR1"/> <xs:element name="Rsn" type="StatusReason6Choice_HR"/> <xs:element name="AddtlInf" type="Max105Text" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType>

element **StatusReasonInformation8_HR2/Orgtr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**PartyIdentification32_HR1**
properties	content complex
children	**Id**
source	<xs:element name="Orgtr" type="PartyIdentification32_HR1"/>

element **StatusReasonInformation8_HR2/Rsn**

diagram	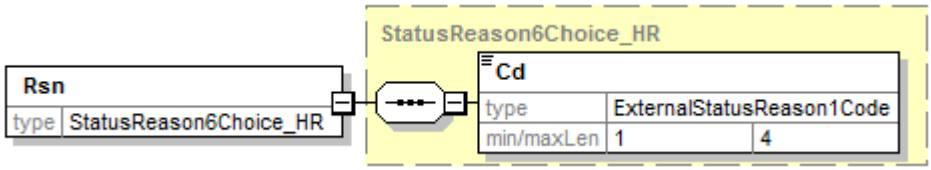
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**StatusReason6Choice_HR**
properties	content complex
children	**Cd**
source	<xs:element name="Rsn" type="StatusReason6Choice_HR"/>

element **StatusReasonInformation8_HR2/AddtlInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max105Text**
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation minLength 1 maxLength 105 pattern \S+.*
source	<xs:element name="AddtlInf" type="Max105Text" minOccurs="0" maxOccurs="unbounded"/>

complexType **StructuredRemittanceInformation7**

diagram	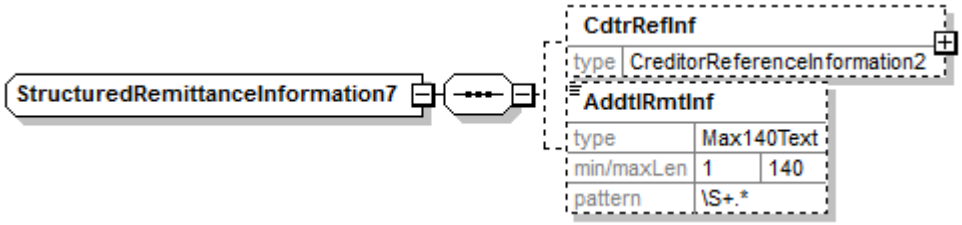
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
children	**CdtrRefInf** **AddtlRmtInf**
used by	element **RemittanceInformation5/Strd**

source	<xs:complexType name="StructuredRemittanceInformation7"> <xs:sequence> <xs:element name="CdtrRefInf" type="CreditorReferenceInformation2" minOccurs="0" maxOccurs="1"/> <xs:element name="AddtlRmtInf" type="Max140Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **StructuredRemittanceInformation7/CdtrRefInf**

diagram	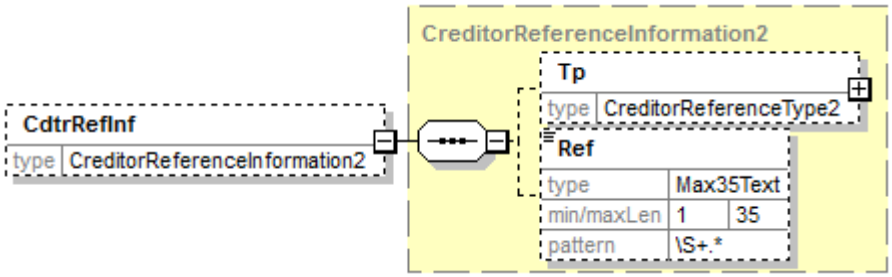
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**CreditorReferenceInformation2**
properties	minOcc 0 maxOcc 1 content complex
children	**Tp** **Ref**
source	<xs:element name="CdtrRefInf" type="CreditorReferenceInformation2" minOccurs="0" maxOccurs="1"/>

element **StructuredRemittanceInformation7/AddtlRmtInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**Max140Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 140 pattern \S+.*
source	<xs:element name="AddtlRmtInf" type="Max140Text" minOccurs="0" maxOccurs="1"/>

simpleType **ActiveOrHistoricCurrencyAndAmount_SimpleType**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:decimal**
properties	base xs:decimal
used by	complexType **ActiveOrHistoricCurrencyAndAmount**
facets	Kind / Value / Annotation minInclusive 0.01 maxInclusive 999999999.99 totalDigits 11 fractionDigits 2 whiteSpace collapse

source	`<xs:simpleType name="ActiveOrHistoricCurrencyAndAmount_SimpleType">`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:minInclusive value="0.01"/>`
	`  <xs:fractionDigits value="2"/>`
	`  <xs:totalDigits value="11"/>`
	`  <xs:maxInclusive value="999999999.99"/>`
	`  <xs:whiteSpace value="collapse"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ActiveOrHistoricCurrencyCode**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **CashAccount16_HR3/Ccy** attribute **ActiveOrHistoricCurrencyAndAmount/@Ccy**
facets	Kind / Value / Annotation pattern [A-Z]{3,3}

source	`<xs:simpleType name="ActiveOrHistoricCurrencyCode">`
	`  <xs:restriction base="xs:string">`
	`  <xs:pattern value="[A-Z]{3,3}"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **AnyBICIdentifier**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **OrganisationIdentification4_HR/BICOrBEI** **OrganisationIdentification4_HR1/BICOrBEI** **OrganisationIdentification4_HR2/BICOrBEI** **OrganisationIdentification4_HR3/BICOrBEI**
facets	Kind / Value / Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

source	`<xs:simpleType name="AnyBICIdentifier">`
	`  <xs:restriction base="xs:string">`
	`  <xs:pattern value="[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}"/>`

```
  </xs:restriction>
</xs:simpleType>
```

simpleType **BICIdentifier**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **FinancialInstitutionIdentification7_HR/BIC** **FinancialInstitutionIdentification7_HR3/BIC**
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

source	`<xs:simpleType name="BICIdentifier">`
	`  <xs:restriction base="xs:string">`
	`  <xs:pattern value="[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **CountryCode**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **PostalAddress6_HR/Ctry** **DateAndPlaceOfBirth/CtryOfBirth**
facets	Kind Value Annotation pattern [A-Z]{2,2}

source	`<xs:simpleType name="CountryCode">`
	`  <xs:restriction base="xs:string">`
	`  <xs:pattern value="[A-Z]{2,2}"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **DecimalNumber**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:decimal**
properties	base xs:decimal
used by	elements **OriginalGroupInformation20_HR/OrgnlCtrlSum** **OriginalPaymentInformation1_HR/OrgnlCtrlSum**
facets	Kind Value Annotation minInclusive 0.01 maxInclusive 9999999999999999.99 totalDigits 18 fractionDigits 2

source	`<xs:simpleType name="DecimalNumber">`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:fractionDigits value="2"/>`
	`  <xs:totalDigits value="18"/>`

```
    <xs:minInclusive value="0.01"/>
    <xs:maxInclusive value="999999999999999.99"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **DocumentType3Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **CreditorReferenceType1Choice/Cd**
facets	Kind Value Annotation enumeration SCOR

source	`<xs:simpleType name="DocumentType3Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="SCOR"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ExternalCategoryPurpose1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **CategoryPurpose1Choice_HR/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4

source	`<xs:simpleType name="ExternalCategoryPurpose1Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="4"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ExternalLocalInstrument1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **LocalInstrument2Choice_HR/Cd**
facets	Kind Value Annotation minLength 1 maxLength 35
source	`<xs:simpleType name="ExternalLocalInstrument1Code">` `  <xs:restriction base="xs:string">`

```
      <xs:minLength value="1"/>
      <xs:maxLength value="35"/>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **ExternalOrganisationIdentification1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **OrganisationIdentificationSchemeName1Choice/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4

source	`<xs:simpleType name="ExternalOrganisationIdentification1Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="4"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ExternalPersonIdentification1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **PersonIdentificationSchemeName1Choice/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4

source	`<xs:simpleType name="ExternalPersonIdentification1Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="4"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ExternalServiceLevel1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **ServiceLevel8Choice_HR/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4

source	<xs:simpleType name="ExternalServiceLevel1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType>

simpleType **ExternalStatusReason1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **StatusReason6Choice_HR/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4
source	<xs:simpleType name="ExternalStatusReason1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType>

simpleType **IBAN2007Identifier**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **AccountIdentification4Choice_HR2/IBAN**
facets	Kind Value Annotation pattern [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
source	<xs:simpleType name="IBAN2007Identifier"> <xs:restriction base="xs:string"> <xs:pattern value="[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}"/> </xs:restriction> </xs:simpleType>

simpleType **ISODate**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**xs:date**
properties	base xs:date
used by	elements **DateAndPlaceOfBirth/BirthDt** **MandateRelatedInformation6_HR/DtOfSgntr** **OriginalTransactionReference13_HR/ReqdColltnDt**
source	<xs:simpleType name="ISODate">> <xs:restriction base="xs:date"/>

	`</xs:simpleType>`

simpleType **ISODateTime**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**xs:dateTime**
properties	base xs:dateTime
used by	element **GroupHeader36_HR/CreDtTm**

source	`<xs:simpleType name="ISODateTime">`
	`  <xs:restriction base="xs:dateTime"/>`
	`</xs:simpleType>`

simpleType **Max1025Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **MandateRelatedInformation6_HR/ElctrncSgntr**
facets	Kind Value Annotation minLength 1 maxLength 1025 pattern \S+.*

source	`<xs:simpleType name="Max1025Text">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="1025"/>`
	`  <xs:pattern value="\S+.*"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **Max105Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **StatusReasonInformation8_HR/AddtlInf** **StatusReasonInformation8_HR2/AddtlInf**
facets	Kind Value Annotation minLength 1 maxLength 105 pattern \S+.*

source	`<xs:simpleType name="Max105Text">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="105"/>`
	`  <xs:pattern value="\S+.*"/>`
	`  </xs:restriction>`

	</xs:simpleType>

simpleType **Max140Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **StructuredRemittanceInformation7/AddtlRmtInf** **RemittanceInformation5/Ustrd**
facets	Kind Value Annotation minLength 1 maxLength 140 pattern \S+.*
source	<xs:simpleType name="Max140Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="140"/> <xs:pattern value="\S+.*"/> </xs:restriction> </xs:simpleType>

simpleType **Max15NumericText**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **OriginalGroupInformation20_HR/OrgnlNbOfTxs** **OriginalPaymentInformation1_HR/OrgnlNbOfTxs**
facets	Kind Value Annotation pattern [0-9]{1,15}
source	<xs:simpleType name="Max15NumericText">\ <xs:restriction base="xs:string">\ <xs:pattern value="[0-9]{1,15}"/> </xs:restriction> </xs:simpleType>

simpleType **Max34Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **GenericAccountIdentification1_HR/Id**
facets	Kind Value Annotation minLength 1 maxLength 34 pattern \S+.*
source	<xs:simpleType name="Max34Text">\

```
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="34"/>
      <xs:pattern value="\S+.*"/>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **Max35Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **DateAndPlaceOfBirth/CityOfBirth** **GenericFinancialIdentification1_HR/Id** **GenericOrganisationIdentification1/Id** **GenericOrganisationIdentification1_HR/Id** **GenericPersonIdentification1_HR/Id** **GenericPersonIdentification1_HR2/Id** **GenericPersonIdentification1_HR3/Id** **GenericPersonIdentification1_HR4/Id** **CreditorReferenceType2/Issr** **GenericOrganisationIdentification1/Issr** **GenericOrganisationIdentification1_HR/Issr** **GenericPersonIdentification1_HR3/Issr** **GenericPersonIdentification1_HR4/Issr** **MandateRelatedInformation6_HR/MndtId** **GroupHeader36_HR/MsgId** **PaymentTransactionInformation25_HR/OrgnlEndToEndId** **PaymentTransactionInformation25_HR/OrgnlInstrId** **AmendmentInformationDetails6_HR/OrgnlMndtId** **OriginalGroupInformation20_HR/OrgnlMsgId** **OriginalGroupInformation20_HR/OrgnlMsgNmId** **OriginalPaymentInformation1_HR/OrgnlPmtInfId** **OrganisationIdentificationSchemeName1Choice/Prtry** **PersonIdentificationSchemeName1Choice/Prtry** **PersonIdentificationSchemeName1Choice_HR/Prtry** **DateAndPlaceOfBirth/PrvcOfBirth** **CreditorReferenceInformation2/Ref** **PaymentTransactionInformation25_HR/StsId**
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*

source	`<xs:simpleType name="Max35Text">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  <xs:pattern value="\S+.*"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **Max70Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **PostalAddress6_HR/AdrLine** **PartyIdentification32_HR4/Nm** **PartyIdentification32_HR5/Nm** **PartyIdentification32_HR6/Nm** **PartyIdentification32_HR7/Nm**
facets	Kind / Value / Annotation minLength 1 maxLength 70 pattern \S+.*

source	`<xs:simpleType name="Max70Text">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`

```
      <xs:maxLength value="70"/>
      <xs:pattern value="\S+.*"/>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **PaymentMethod4Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **OriginalTransactionReference13_HR/PmtMtd**
facets	Kind Value Annotation enumeration DD

source	`<xs:simpleType name="PaymentMethod4Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="DD"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **SequenceType1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **PaymentTypeInformation22_HR/SeqTp**
facets	Kind Value Annotation enumeration FRST enumeration RCUR enumeration FNAL enumeration OOFF

source	`<xs:simpleType name="SequenceType1Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="FRST"/>`
	`  <xs:enumeration value="RCUR"/>`
	`  <xs:enumeration value="FNAL"/>`
	`  <xs:enumeration value="OOFF"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **TransactionGroupStatus3Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	elements **OriginalGroupInformation20_HR/GrpSts** **OriginalPaymentInformation1_HR/PmtInfSts**
facets	Kind Value Annotation

	enumeration RJCT
source	<xs:simpleType name="TransactionGroupStatus3Code"> <xs:restriction base="xs:string"> <xs:enumeration value="RJCT"/> </xs:restriction> </xs:simpleType>

simpleType **TransactionIndividualStatus3Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	restriction of **xs:string**
properties	base xs:string
used by	element **PaymentTransactionInformation25_HR/TxSts**
facets	Kind Value Annotation enumeration RJCT
source	<xs:simpleType name="TransactionIndividualStatus3Code"> <xs:restriction base="xs:string"> <xs:enumeration value="RJCT"/> </xs:restriction> </xs:simpleType>

simpleType **TrueFalseIndicator**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.002.001.03
type	**xs:boolean**
properties	base xs:boolean
used by	element **MandateRelatedInformation6_HR/AmdmntInd**
source	<xs:simpleType name="TrueFalseIndicator"> <xs:restriction base="xs:boolean"/> </xs:simpleType>

XML Schema documentation generated by **XMLSpy** Schema Editor **http://www.altova.com/xmlspy**