Schema **sepa.hr.pain.008.001.02.xsd**

schema location: **sepa.hr.pain.008.001.02.xsd**
attributeFormDefault:

elementFormDefault: **qualified**
targetNamespace: **urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02**

Elements
Document

Complex types
AccountIdentification4Choice_2
AccountIdentification4Choice_3
AccountIdentification4Choice_HR
ActiveOrHistoricCurrencyAndAmount_HRK
AmendmentInformationDetails6
BranchAndFinancialInstitutionIdentification4_1
BranchAndFinancialInstitutionIdentification4_2
CashAccount16_2
CashAccount16_3
CashAccount16_HR
CategoryPurpose1Choice
CreditorReferenceInformation2
CreditorReferenceType1Choice
CreditorReferenceType2
CustomerDirectDebitInitiationV02
DateAndPlaceOfBirth
DirectDebitTransaction6
DirectDebitTransactionInformation9
Document
FinancialIdentificationSchemeName1Choice
FinancialInstitutionIdentification7_1
FinancialInstitutionIdentification7_2
GenericAccountIdentification1
GenericFinancialIdentification1_1
GenericFinancialIdentification1_2
GenericOrganisationIdentification1
GenericPersonIdentification1_1
GenericPersonIdentification1_2
GroupHeader39
LocalInstrument2Choice
MandateRelatedInformation6
OrganisationIdentification4
OrganisationIdentificationSchemeName1Choice
Party6Choice_1
Party6Choice_2
PartyIdentification32_1
PartyIdentification32_2
PartyIdentification32_3

Simple types
ActiveOrHistoricCurrencyAndAmount_SimpleType
ActiveOrHistoricCurrencyCode_HRK
AnyBICIdentifier
BatchBookingIndicator
BICIdentifier
ChargeBearerType1Code
CountryCode
DecimalNumber
DocumentType3Code
ExternalAccountIdentification1Code
ExternalCategoryPurpose1Code
ExternalFinancialInstitutionIdentification1Code
ExternalLocalInstrument1Code
ExternalOrganisationIdentification1Code
ExternalPersonIdentification1Code
ExternalPurpose1Code
ExternalServiceLevel1Code
IBAN2007Identifier
IBAN2007Identifier_HR
ISODate
ISODateTime
Max1025Text
Max140Text
Max15NumericText
Max34Text
Max35Text
Max35Text_CI
Max35Text_NP
Max35Text_SEPA
Max70Text
PaymentMethod2Code
SequenceType1Code
TrueFalseIndicator

PartyIdentification32_4
PartyIdentification32_5
PartyIdentification32_6
PaymentIdentification1
PaymentInstructionInformation4
PaymentTypeInformation20
PersonIdentification5_1
PersonIdentification5_2
PersonIdentificationSchemeName1Choice_1
PersonIdentificationSchemeName1Choice_2
PostalAddress6
Purpose2Choice
RemittanceInformation5
ServiceLevel8Choice
StructuredRemittanceInformation7

element **Document**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	Document
properties	content complex
children	CstmrDrctDbtInitn
source	<xs:element name="Document" type="Document"/>

complexType **AccountIdentification4Choice_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	Othr
used by	element CashAccount16_2/Id
source	<xs:complexType name="AccountIdentification4Choice_2"> <xs:sequence> <xs:element name="Othr" type="GenericAccountIdentification1"/> </xs:sequence> </xs:complexType>

element **AccountIdentification4Choice_2/Othr**

diagram	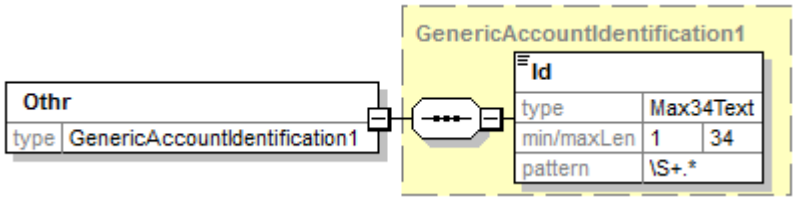
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**GenericAccountIdentification1**
properties	content complex
children	**Id**
source	<xs:element name="Othr" type="GenericAccountIdentification1"/>

complexType **AccountIdentification4Choice_3**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**IBAN**
used by	element **CashAccount16_3/Id**
source	<xs:complexType name="AccountIdentification4Choice_3"> <xs:sequence> <xs:element name="IBAN" type="IBAN2007Identifier"/> </xs:sequence> </xs:complexType>

element **AccountIdentification4Choice_3/IBAN**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**IBAN2007Identifier**
properties	content simple
facets	Kind Value Annotation pattern [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
source	<xs:element name="IBAN" type="IBAN2007Identifier"/>

complexType **AccountIdentification4Choice_HR**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**IBAN**
used by	element **CashAccount16_HR/Id**
source	<xs:complexType name="AccountIdentification4Choice_HR"> <xs:sequence> <xs:element name="IBAN" type="IBAN2007Identifier_HR"/> </xs:sequence> </xs:complexType>

element **AccountIdentification4Choice_HR/IBAN**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**IBAN2007Identifier_HR**
properties	content simple
facets	Kind / Value / Annotation pattern / [H][R][0-9]{19}
source	<xs:element name="IBAN" type="IBAN2007Identifier_HR"/>

complexType **ActiveOrHistoricCurrencyAndAmount_HRK**

diagram	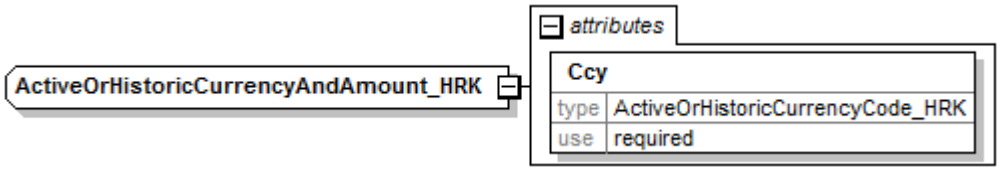
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	extension of **ActiveOrHistoricCurrencyAndAmount_SimpleType**
properties	base ActiveOrHistoricCurrencyAndAmount_SimpleType
used by	element **DirectDebitTransactionInformation9/InstdAmt**
facets	Kind / Value / Annotation minInclusive / 0.01 maxInclusive / 999999999.99 totalDigits / 11 fractionDigits / 2 whiteSpace / collapse

attributes	Name	Type	Use	Default	Fixed	Annotation
	Ccy	ActiveOrHistoricCurrencyCode_HRK	required			

source

```
<xs:complexType name="ActiveOrHistoricCurrencyAndAmount_HRK">
  <xs:simpleContent>
    <xs:extension base="ActiveOrHistoricCurrencyAndAmount_SimpleType">
      <xs:attribute name="Ccy" type="ActiveOrHistoricCurrencyCode_HRK" use="required"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

attribute **ActiveOrHistoricCurrencyAndAmount_HRK/@Ccy**

type	ActiveOrHistoricCurrencyCode_HRK
properties	use required
facets	Kind: enumeration, Value: HRK Kind: enumeration, Value: EUR Annotation

source

```
<xs:attribute name="Ccy" type="ActiveOrHistoricCurrencyCode_HRK" use="required"/>
```

complexType **AmendmentInformationDetails6**

diagram

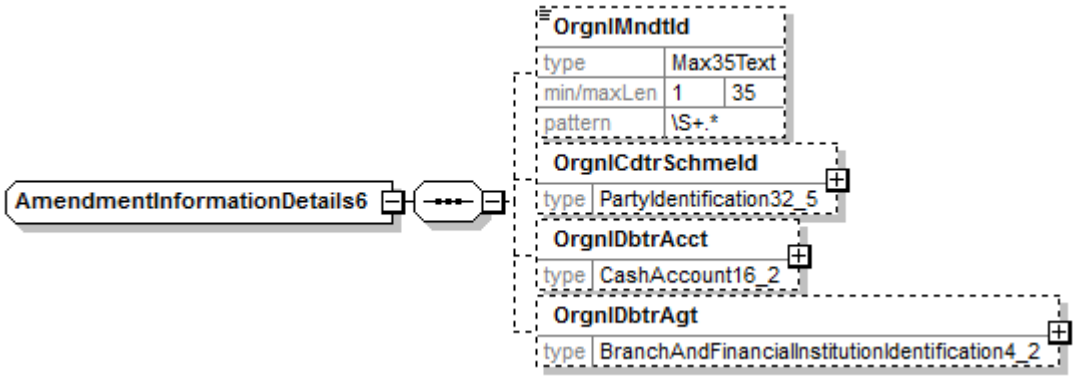

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	OrgnlMndtId OrgnlCdtrSchmeId OrgnlDbtrAcct OrgnlDbtrAgt
used by	element MandateRelatedInformation6/AmdmntInfDtls

source

```
<xs:complexType name="AmendmentInformationDetails6">
  <xs:sequence>
    <xs:element name="OrgnlMndtId" type="Max35Text" minOccurs="0" maxOccurs="1"/>
    <xs:element name="OrgnlCdtrSchmeId" type="PartyIdentification32_5" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="OrgnlDbtrAcct" type="CashAccount16_2" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="OrgnlDbtrAgt" type="BranchAndFinancialInstitutionIdentification4_2"
minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

element **AmendmentInformationDetails6/OrgnlMndtId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="OrgnlMndtId" type="Max35Text" minOccurs="0" maxOccurs="1"/>

element **AmendmentInformationDetails6/OrgnlCdtrSchmeId**

diagram	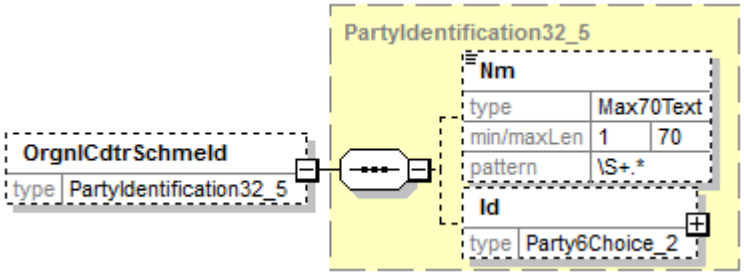
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_5**
properties	minOcc 0 maxOcc 1 content complex
children	**Nm** **Id**
source	<xs:element name="OrgnlCdtrSchmeId" type="PartyIdentification32_5" minOccurs="0" maxOccurs="1"/>

element **AmendmentInformationDetails6/OrgnlDbtrAcct**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CashAccount16_2**
properties	minOcc 0

	maxOcc 1 content complex
children	**Id**
source	<xs:element name="OrgnlDbtrAcct" type="CashAccount16_2" minOccurs="0" maxOccurs="1"/>

element **AmendmentInformationDetails6/OrgnlDbtrAgt**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**BranchAndFinancialInstitutionIdentification4_2**
properties	minOcc 0 maxOcc 1 content complex
children	**FinInstnId**
source	<xs:element name="OrgnlDbtrAgt" type="BranchAndFinancialInstitutionIdentification4_2" minOccurs="0" maxOccurs="1"/>

complexType **BranchAndFinancialInstitutionIdentification4_1**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**FinInstnId**
used by	elements **PaymentInstructionInformation4/CdtrAgt** **DirectDebitTransactionInformation9/DbtrAgt**
source	<xs:complexType name="BranchAndFinancialInstitutionIdentification4_1"> <xs:sequence> <xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_1"/> </xs:sequence> </xs:complexType>

element **BranchAndFinancialInstitutionIdentification4_1/FinInstnId**

diagram	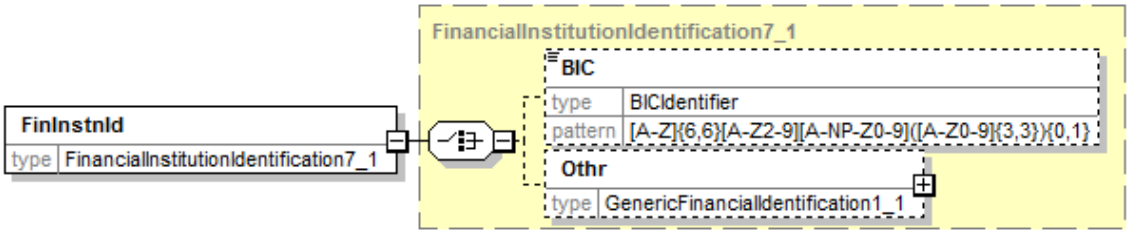
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**FinancialInstitutionIdentification7_1**

properties	content complex
children	**BIC** **Othr**
source	<xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_1"/>

complexType **BranchAndFinancialInstitutionIdentification4_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**FinInstnId**
used by	element **AmendmentInformationDetails6/OrgnlDbtrAgt**
source	<xs:complexType name="BranchAndFinancialInstitutionIdentification4_2"> <xs:sequence> <xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_2"/> </xs:sequence> </xs:complexType>

element **BranchAndFinancialInstitutionIdentification4_2/FinInstnId**

diagram	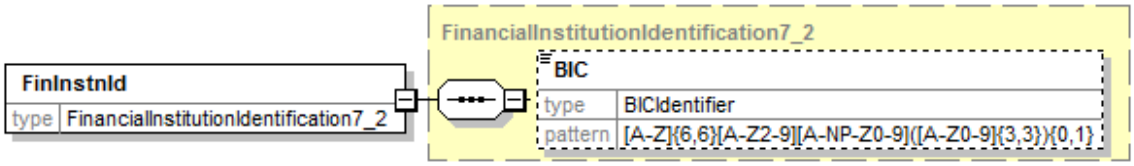
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**FinancialInstitutionIdentification7_2**
properties	content complex
children	**BIC**
source	<xs:element name="FinInstnId" type="FinancialInstitutionIdentification7_2"/>

complexType **CashAccount16_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id**
used by	element **AmendmentInformationDetails6/OrgnlDbtrAcct**
source	<xs:complexType name="CashAccount16_2"> <xs:sequence> <xs:element name="Id" type="AccountIdentification4Choice_2"/> </xs:sequence>

	`</xs:complexType>`

element **CashAccount16_2/Id**

diagram	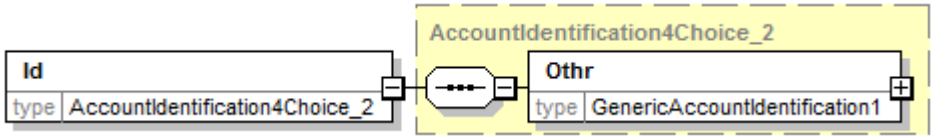
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**AccountIdentification4Choice_2**
properties	content complex
children	**Othr**
source	`<xs:element name="Id" type="AccountIdentification4Choice_2"/>`

complexType **CashAccount16_3**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id**
used by	element **DirectDebitTransactionInformation9/DbtrAcct**

source	`<xs:complexType name="CashAccount16_3">`
	`  <xs:sequence>`
	`  <xs:element name="Id" type="AccountIdentification4Choice_3"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **CashAccount16_3/Id**

diagram	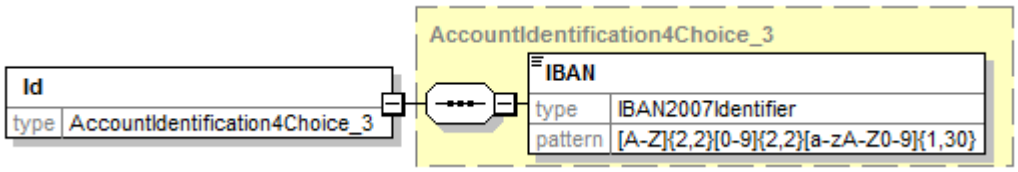
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**AccountIdentification4Choice_3**
properties	content complex
children	**IBAN**
source	`<xs:element name="Id" type="AccountIdentification4Choice_3"/>`

complexType **CashAccount16_HR**

diagram	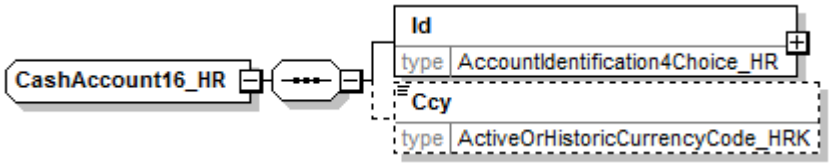
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id** **Ccy**
used by	element **PaymentInstructionInformation4/CdtrAcct**
source	<xs:complexType name="CashAccount16_HR"> <xs:sequence> <xs:element name="Id" type="AccountIdentification4Choice_HR"/> <xs:element name="Ccy" type="ActiveOrHistoricCurrencyCode_HRK" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **CashAccount16_HR/Id**

diagram	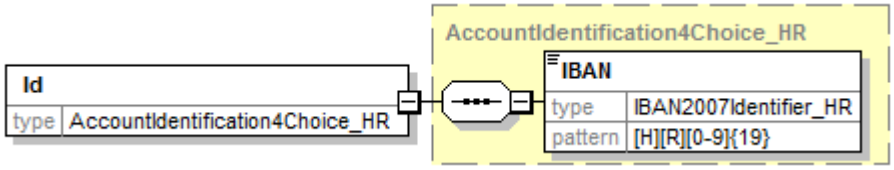
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**AccountIdentification4Choice_HR**
properties	content complex
children	**IBAN**
source	<xs:element name="Id" type="AccountIdentification4Choice_HR"/>

element **CashAccount16_HR/Ccy**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ActiveOrHistoricCurrencyCode_HRK**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration HRK enumeration EUR
source	<xs:element name="Ccy" type="ActiveOrHistoricCurrencyCode_HRK" minOccurs="0" maxOccurs="1"/>

complexType **CategoryPurpose1Choice**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Cd**
used by	element **PaymentTypeInformation20/CtgyPurp**

source	`<xs:complexType name="CategoryPurpose1Choice">`
	`  <xs:sequence>`
	`  <xs:element name="Cd" type="ExternalCategoryPurpose1Code"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **CategoryPurpose1Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ExternalCategoryPurpose1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4
source	`<xs:element name="Cd" type="ExternalCategoryPurpose1Code"/>`

complexType **CreditorReferenceInformation2**

diagram	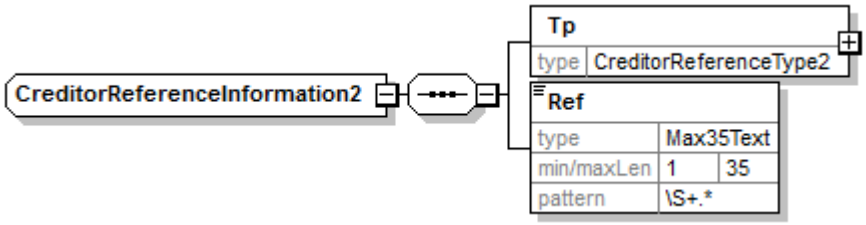
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Tp** **Ref**
used by	element **StructuredRemittanceInformation7/CdtrRefInf**

source	`<xs:complexType name="CreditorReferenceInformation2">`
	`  <xs:sequence>`
	`  <xs:element name="Tp" type="CreditorReferenceType2" minOccurs="1" maxOccurs="1"/>`

```
    <xs:element name="Ref" type="Max35Text" minOccurs="1" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

element **CreditorReferenceInformation2/Tp**

diagram	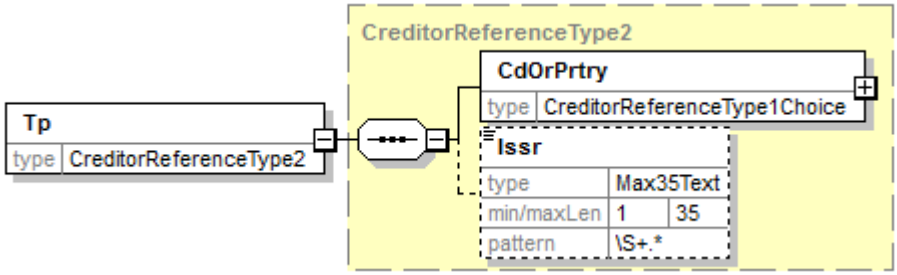
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CreditorReferenceType2**
properties	content complex
children	**CdOrPrtry** **Issr**
source	`<xs:element name="Tp" type="CreditorReferenceType2" minOccurs="1" maxOccurs="1"/>`

element **CreditorReferenceInformation2/Ref**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="Ref" type="Max35Text" minOccurs="1" maxOccurs="1"/>`

complexType **CreditorReferenceType1Choice**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Cd**

used by	element **CreditorReferenceType2/CdOrPrtry**
source	<xs:complexType name="CreditorReferenceType1Choice"> <xs:sequence> <xs:element name="Cd" type="DocumentType3Code"/> </xs:sequence> </xs:complexType>

element **CreditorReferenceType1Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**DocumentType3Code**
properties	content simple
facets	Kind: enumeration; Value: SCOR; Annotation
source	<xs:element name="Cd" type="DocumentType3Code"/>

complexType **CreditorReferenceType2**

diagram	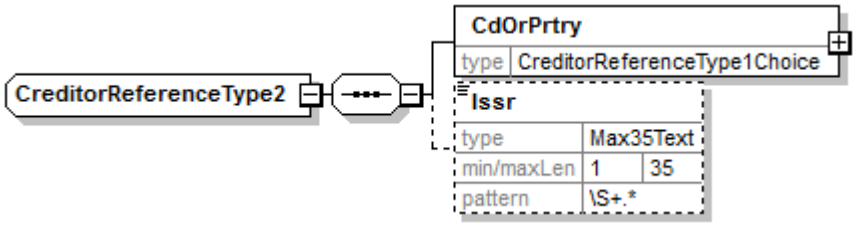
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**CdOrPrtry** **Issr**
used by	element **CreditorReferenceInformation2/Tp**
source	<xs:complexType name="CreditorReferenceType2"> <xs:sequence> <xs:element name="CdOrPrtry" type="CreditorReferenceType1Choice"/> <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **CreditorReferenceType2/CdOrPrtry**

diagram	

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CreditorReferenceType1Choice**
properties	content complex
children	**Cd**
source	<xs:element name="CdOrPrtry" type="CreditorReferenceType1Choice"/>

element **CreditorReferenceType2/Issr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>

complexType **CustomerDirectDebitInitiationV02**

diagram	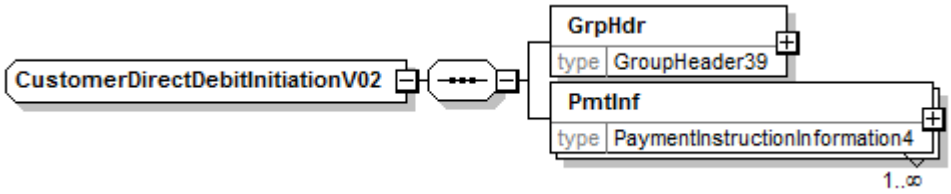
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**GrpHdr** **PmtInf**
used by	element **Document/CstmrDrctDbtInitn**
source	<xs:complexType name="CustomerDirectDebitInitiationV02"> <xs:sequence> <xs:element name="GrpHdr" type="GroupHeader39"/> <xs:element name="PmtInf" type="PaymentInstructionInformation4" minOccurs="1" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType>

element **CustomerDirectDebitInitiationV02/GrpHdr**

diagram	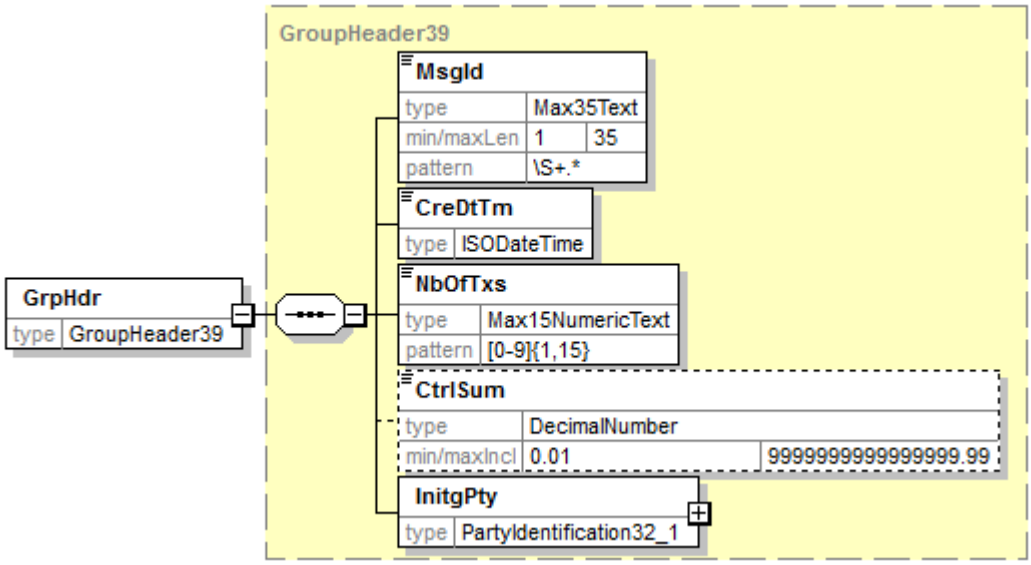
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**GroupHeader39**
properties	content complex
children	**MsgId** **CreDtTm** **NbOfTxs** **CtrlSum** **InitgPty**
source	<xs:element name="GrpHdr" type="GroupHeader39"/>

element **CustomerDirectDebitInitiationV02/PmtInf**

diagram	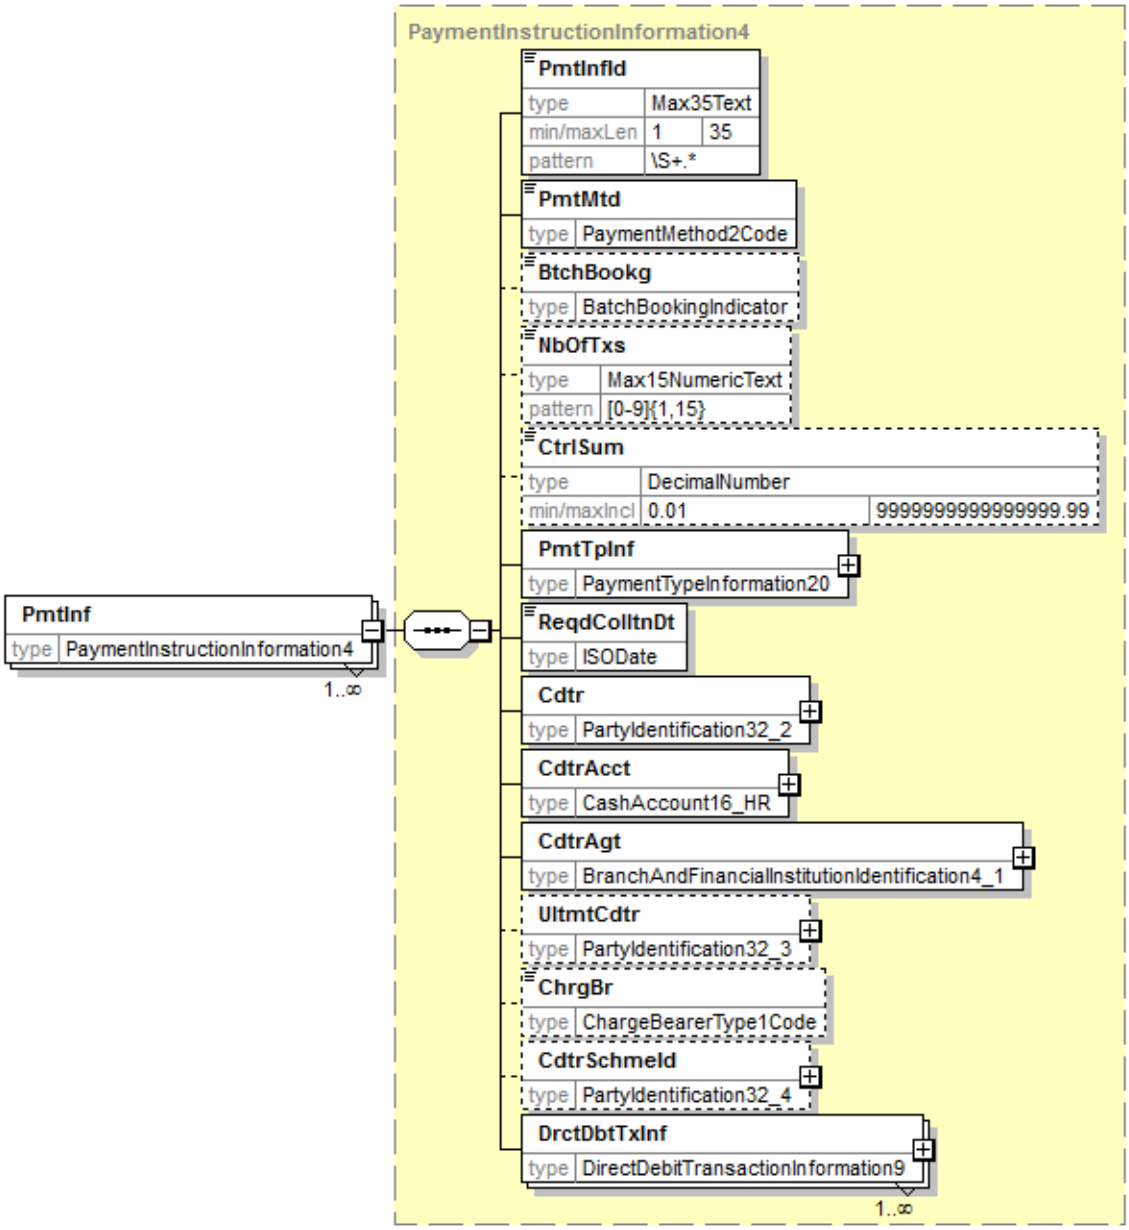
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PaymentInstructionInformation4**
properties	minOcc 1 maxOcc unbounded content complex
children	**PmtInfId** **PmtMtd** **BtchBookg** **NbOfTxs** **CtrlSum** **PmtTpInf** **ReqdCollt nDt** **Cdtr** **CdtrAcct** **CdtrAgt** **UltmtCdtr** **ChrgBr** **CdtrSchmeId** **DrctDbtTxInf**
source	<xs:element name="PmtInf" type="PaymentInstructionInformation4" minOccurs="1" maxOccurs="unbounded"/>

complexType **DateAndPlaceOfBirth**

diagram	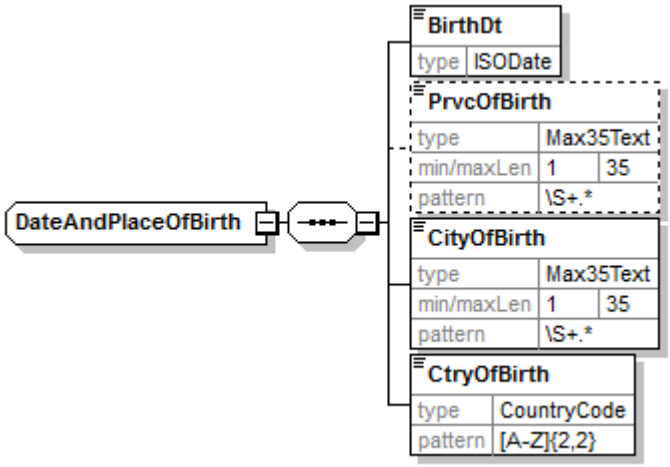
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**BirthDt** **PrvcOfBirth** **CityOfBirth** **CtryOfBirth**
used by	element **PersonIdentification5_1/DtAndPlcOfBirth**

source	`<xs:complexType name="DateAndPlaceOfBirth">`
	`  <xs:sequence>`
	`  <xs:element name="BirthDt" type="ISODate"/>`
	`  <xs:element name="PrvcOfBirth" type="Max35Text" minOccurs="0" maxOccurs="1"/>`
	`  <xs:element name="CityOfBirth" type="Max35Text"/>`
	`  <xs:element name="CtryOfBirth" type="CountryCode"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **DateAndPlaceOfBirth/BirthDt**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ISODate**
properties	content simple
source	`<xs:element name="BirthDt" type="ISODate"/>`

element **DateAndPlaceOfBirth/PrvcOfBirth**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="PrvcOfBirth" type="Max35Text" minOccurs="0" maxOccurs="1"/>

element **DateAndPlaceOfBirth/CityOfBirth**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="CityOfBirth" type="Max35Text"/>

element **DateAndPlaceOfBirth/CtryOfBirth**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CountryCode**
properties	content simple
facets	Kind Value Annotation pattern [A-Z]{2,2}
source	<xs:element name="CtryOfBirth" type="CountryCode"/>

complexType **DirectDebitTransaction6**

diagram	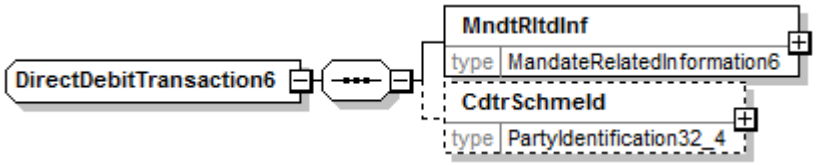
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**MndtRltdInf** **CdtrSchmeId**
used by	element **DirectDebitTransactionInformation9/DrctDbtTx**
source	<xs:complexType name="DirectDebitTransaction6"> <xs:sequence> <xs:element name="MndtRltdInf" type="MandateRelatedInformation6" minOccurs="1" maxOccurs="1"/> <xs:element name="CdtrSchmeId" type="PartyIdentification32_4" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **DirectDebitTransaction6/MndtRltdInf**

diagram	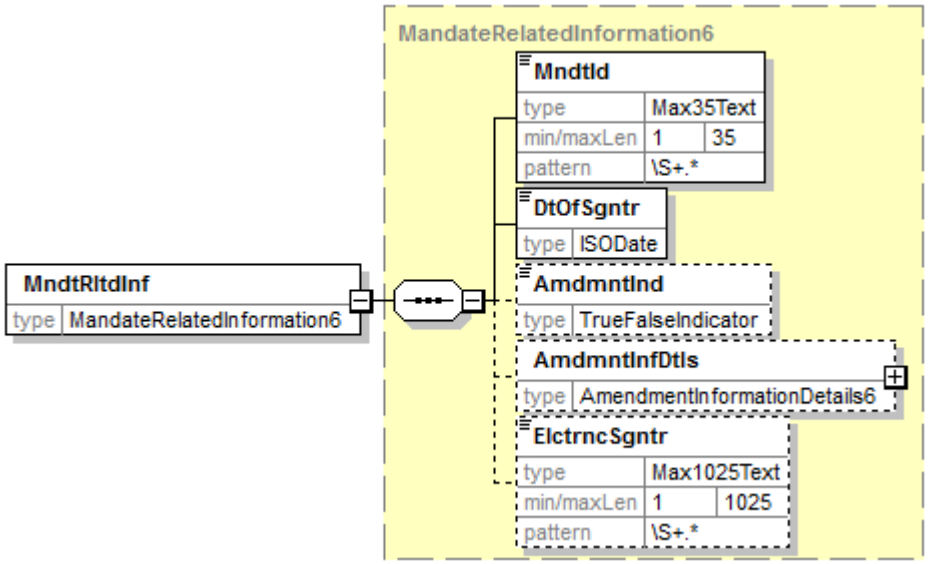
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**MandateRelatedInformation6**
properties	content complex
children	**MndtId** **DtOfSgntr** **AmdmntInd** **AmdmntInfDtls** **ElctrncSgntr**
source	<xs:element name="MndtRltdInf" type="MandateRelatedInformation6" minOccurs="1" maxOccurs="1"/>

element **DirectDebitTransaction6/CdtrSchmeId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_4**
properties	minOcc 0 maxOcc 1 content complex
children	**Id**
source	<xs:element name="CdtrSchmeId" type="PartyIdentification32_4" minOccurs="0" maxOccurs="1"/>

complexType **DirectDebitTransactionInformation9**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**PmtId** **InstdAmt** **ChrgBr** **DrctDbtTx** **UltmtCdtr** **DbtrAgt** **Dbtr** **DbtrAcct** **UltmtDbtr** **Purp** **RmtInf**
used by	element **PaymentInstructionInformation4/DrctDbtTxInf**
source	<xs:complexType name="DirectDebitTransactionInformation9"> <xs:sequence> <xs:element name="PmtId" type="PaymentIdentification1"/>

```
    <xs:element name="InstdAmt" type="ActiveOrHistoricCurrencyAndAmount_HRK"/>
    <xs:element name="ChrgBr" type="ChargeBearerType1Code" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="DrctDbtTx" type="DirectDebitTransaction6" minOccurs="1"
maxOccurs="1"/>
    <xs:element name="UltmtCdtr" type="PartyIdentification32_3" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="DbtrAgt" type="BranchAndFinancialInstitutionIdentification4_1"/>
    <xs:element name="Dbtr" type="PartyIdentification32_6"/>
    <xs:element name="DbtrAcct" type="CashAccount16_3"/>
    <xs:element name="UltmtDbtr" type="PartyIdentification32_3" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="Purp" type="Purpose2Choice" minOccurs="0" maxOccurs="1"/>
    <xs:element name="RmtInf" type="RemittanceInformation5" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

element **DirectDebitTransactionInformation9/PmtId**

diagram	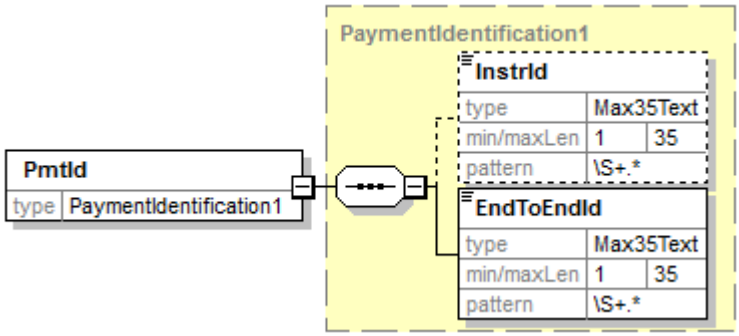
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PaymentIdentification1**
properties	content complex
children	**InstrId** **EndToEndId**
source	`<xs:element name="PmtId" type="PaymentIdentification1"/>`

element **DirectDebitTransactionInformation9/InstdAmt**

diagram	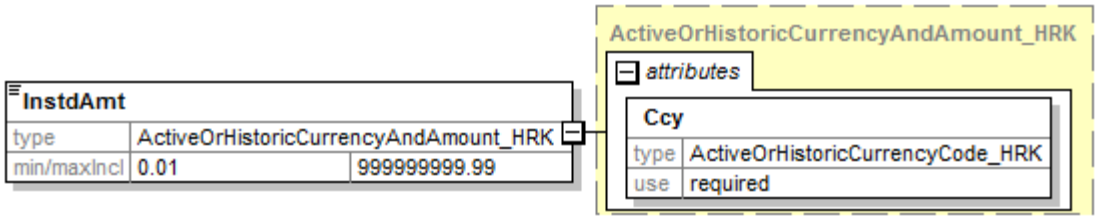
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ActiveOrHistoricCurrencyAndAmount_HRK**
properties	content complex

facets	Kind	Value	Annotation			
	minInclusive	0.01				
	maxInclusive	999999999.99				
	totalDigits	11				
	fractionDigits	2				
	whiteSpace	collapse				
attributes	Name	Type	Use	Default	Fixed	Annotation
	Ccy	**ActiveOrHistoricCurrencyCode_HRK**	required			
source	<xs:element name="InstdAmt" type="ActiveOrHistoricCurrencyAndAmount_HRK"/>					

element **DirectDebitTransactionInformation9/ChrgBr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ChargeBearerType1Code**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind: enumeration; Value: SLEV; Annotation
source	<xs:element name="ChrgBr" type="ChargeBearerType1Code" minOccurs="0" maxOccurs="1"/>

element **DirectDebitTransactionInformation9/DrctDbtTx**

diagram	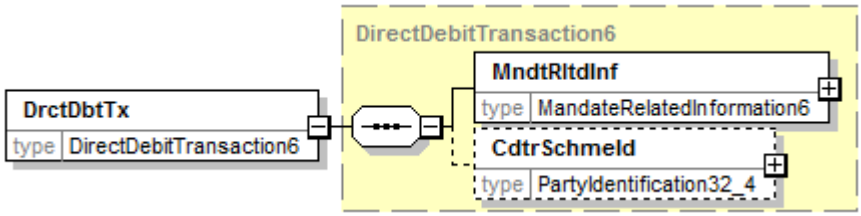
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**DirectDebitTransaction6**
properties	content complex
children	**MndtRltdInf** **CdtrSchmeId**
source	<xs:element name="DrctDbtTx" type="DirectDebitTransaction6" minOccurs="1" maxOccurs="1"/>

element **DirectDebitTransactionInformation9/UltmtCdtr**

diagram	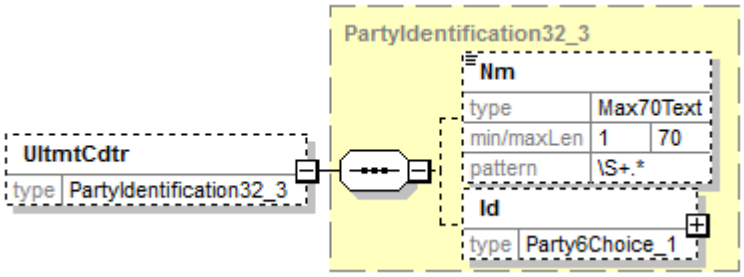
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_3**
properties	minOcc 0 maxOcc 1 content complex
children	**Nm** **Id**
source	<xs:element name="UltmtCdtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/>

element **DirectDebitTransactionInformation9/DbtrAgt**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**BranchAndFinancialInstitutionIdentification4_1**
properties	content complex
children	**FinInstnId**
source	<xs:element name="DbtrAgt" type="BranchAndFinancialInstitutionIdentification4_1"/>

element **DirectDebitTransactionInformation9/Dbtr**

diagram	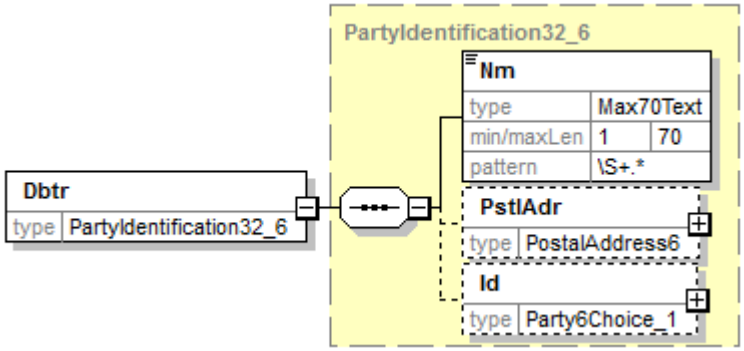
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_6**

properties	content complex
children	**Nm** **PstlAdr** **Id**
source	<xs:element name="Dbtr" type="PartyIdentification32_6"/>

element **DirectDebitTransactionInformation9/DbtrAcct**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CashAccount16_3**
properties	content complex
children	**Id**
source	<xs:element name="DbtrAcct" type="CashAccount16_3"/>

element **DirectDebitTransactionInformation9/UltmtDbtr**

diagram	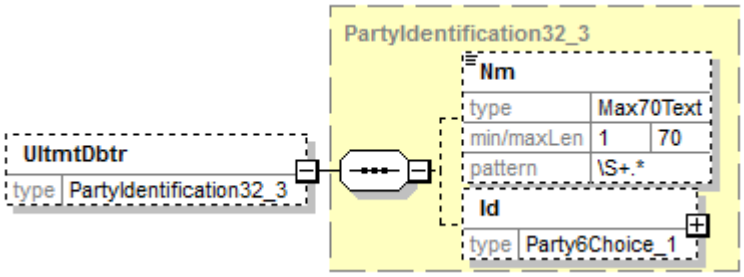
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_3**
properties	minOcc 0 maxOcc 1 content complex
children	**Nm** **Id**
source	<xs:element name="UltmtDbtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/>

element **DirectDebitTransactionInformation9/Purp**

diagram	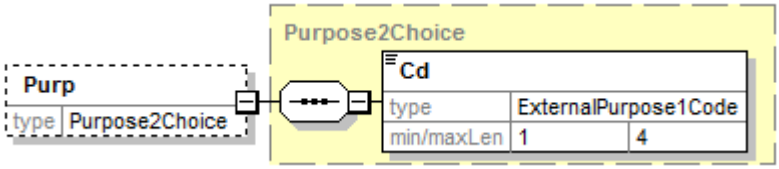
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

type	**Purpose2Choice**
properties	minOcc 0 maxOcc 1 content complex
children	**Cd**
source	<xs:element name="Purp" type="Purpose2Choice" minOccurs="0" maxOccurs="1"/>

element **DirectDebitTransactionInformation9/RmtInf**

diagram	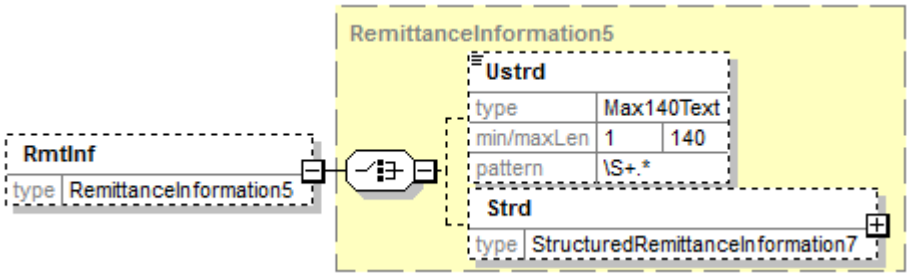
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**RemittanceInformation5**
properties	minOcc 0 maxOcc 1 content complex
children	**Ustrd** **Strd**
source	<xs:element name="RmtInf" type="RemittanceInformation5" minOccurs="0" maxOccurs="1"/>

complexType **Document**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**CstmrDrctDbtInitn**
used by	element **Document**
source	<xs:complexType name="Document"> <xs:sequence> <xs:element name="CstmrDrctDbtInitn" type="CustomerDirectDebitInitiationV02"/> </xs:sequence> </xs:complexType>

element **Document/CstmrDrctDbtInitn**

diagram	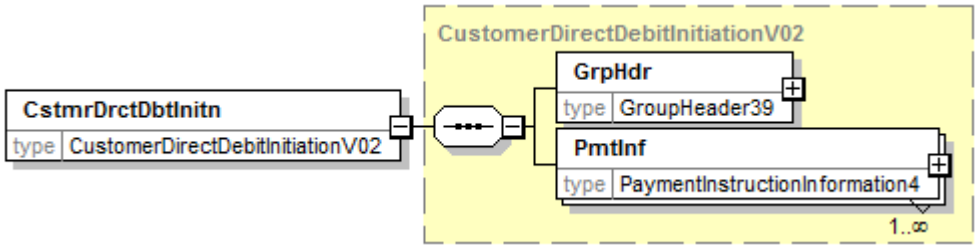
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CustomerDirectDebitInitiationV02**
properties	content complex
children	**GrpHdr** **PmtInf**
source	<xs:element name="CstmrDrctDbtInitn" type="CustomerDirectDebitInitiationV02"/>

complexType **FinancialIdentificationSchemeName1Choice**

diagram	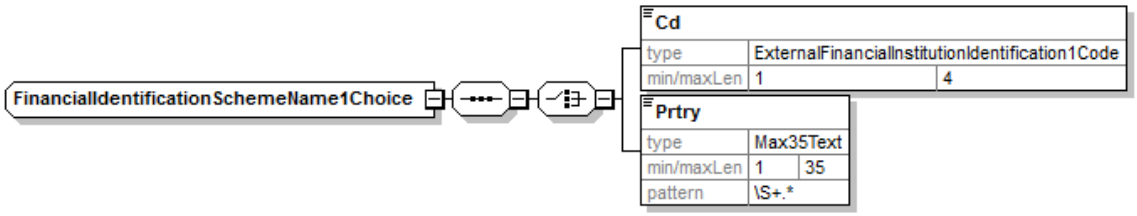
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Cd** **Prtry**
source	<xs:complexType name="FinancialIdentificationSchemeName1Choice"> <xs:sequence> <xs:choice> <xs:element name="Cd" type="ExternalFinancialInstitutionIdentification1Code"/> <xs:element name="Prtry" type="Max35Text"/> </xs:choice> </xs:sequence> </xs:complexType>

element **FinancialIdentificationSchemeName1Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ExternalFinancialInstitutionIdentification1Code**
properties	content simple
facets	Kind Value Annotation minLength 1

	maxLength 4
source	<xs:element name="Cd" type="ExternalFinancialInstitutionIdentification1Code"/>

element **FinancialIdentificationSchemeName1Choice/Prtry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Prtry" type="Max35Text"/>

complexType **FinancialInstitutionIdentification7_1**

diagram	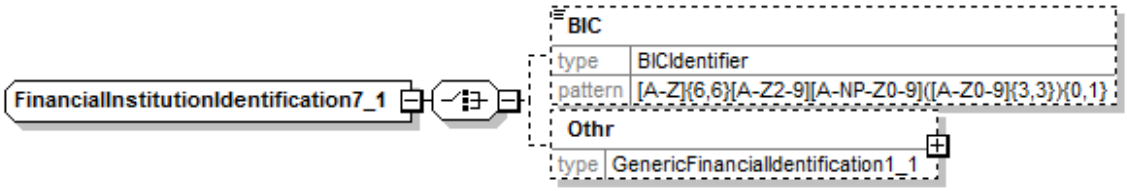
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**BIC** **Othr**
used by	element **BranchAndFinancialInstitutionIdentification4_1/FinInstnId**
source	<xs:complexType name="FinancialInstitutionIdentification7_1"> <xs:choice> <xs:element name="BIC" type="BICIdentifier" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericFinancialIdentification1_1" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:complexType>

element **FinancialInstitutionIdentification7_1/BIC**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

type	**BICIdentifier**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:element name="BIC" type="BICIdentifier" minOccurs="0" maxOccurs="1"/>

element **FinancialInstitutionIdentification7_1/Othr**

diagram	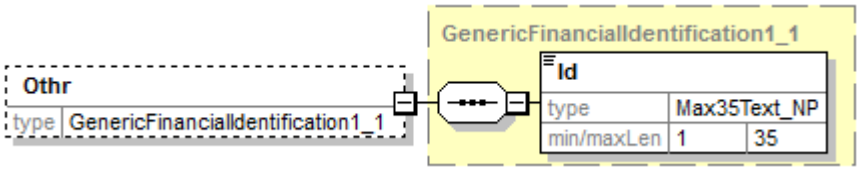
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**GenericFinancialIdentification1_1**
properties	minOcc 0 maxOcc 1 content complex
children	**Id**
source	<xs:element name="Othr" type="GenericFinancialIdentification1_1" minOccurs="0" maxOccurs="1"/>

complexType **FinancialInstitutionIdentification7_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**BIC**
used by	element **BranchAndFinancialInstitutionIdentification4_2/FinInstnId**
source	<xs:complexType name="FinancialInstitutionIdentification7_2"> <xs:sequence> <xs:element name="BIC" type="BICIdentifier" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **FinancialInstitutionIdentification7_2/BIC**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

type	**BICIdentifier**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	`<xs:element name="BIC" type="BICIdentifier" minOccurs="0" maxOccurs="1"/>`

complexType **GenericAccountIdentification1**

diagram	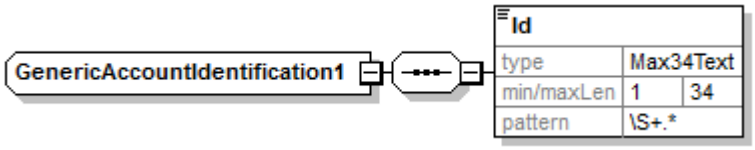
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id**
used by	element **AccountIdentification4Choice_2/Othr**

source	`<xs:complexType name="GenericAccountIdentification1">`
	`  <xs:sequence>`
	`  <xs:element name="Id" type="Max34Text"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **GenericAccountIdentification1/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max34Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 34 pattern \S+.*
source	`<xs:element name="Id" type="Max34Text"/>`

complexType **GenericFinancialIdentification1_1**

diagram	

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id**
used by	element **FinancialInstitutionIdentification7_1/Othr**
source	<xs:complexType name="GenericFinancialIdentification1_1"> <xs:sequence> <xs:element name="Id" type="Max35Text_NP"/> </xs:sequence> </xs:complexType>

element **GenericFinancialIdentification1_1/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text_NP**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 enumeration NOTPROVIDED
source	<xs:element name="Id" type="Max35Text_NP"/>

complexType **GenericFinancialIdentification1_2**

diagram	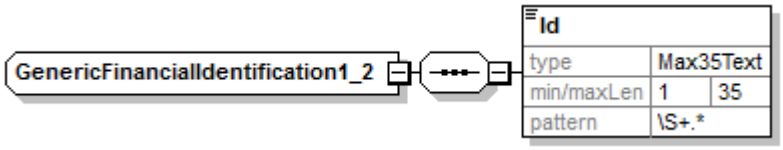
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id**
source	<xs:complexType name="GenericFinancialIdentification1_2"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> </xs:sequence> </xs:complexType>

element **GenericFinancialIdentification1_2/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

complexType **GenericOrganisationIdentification1**

diagram	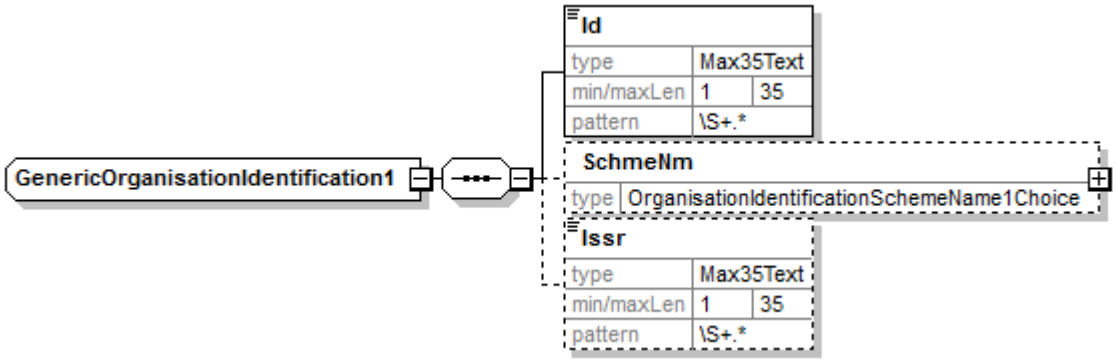
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id** **SchmeNm** **Issr**
used by	element **OrganisationIdentification4/Othr**
source	<xs:complexType name="GenericOrganisationIdentification1"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> <xs:element name="SchmeNm" type="OrganisationIdentificationSchemeName1Choice" minOccurs="0" maxOccurs="1"/> <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **GenericOrganisationIdentification1/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

element **GenericOrganisationIdentification1/SchmeNm**

diagram	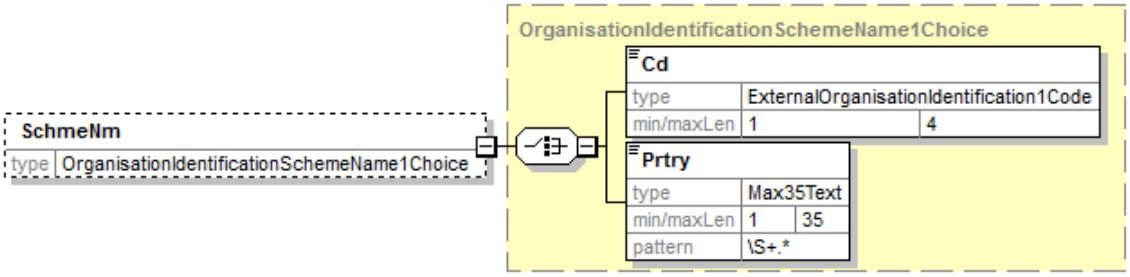
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**OrganisationIdentificationSchemeName1Choice**
properties	minOcc 0 maxOcc 1 content complex
children	**Cd** **Prtry**
source	<xs:element name="SchmeNm" type="OrganisationIdentificationSchemeName1Choice" minOccurs="0" maxOccurs="1"/>

element **GenericOrganisationIdentification1/Issr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>

complexType **GenericPersonIdentification1_1**

diagram	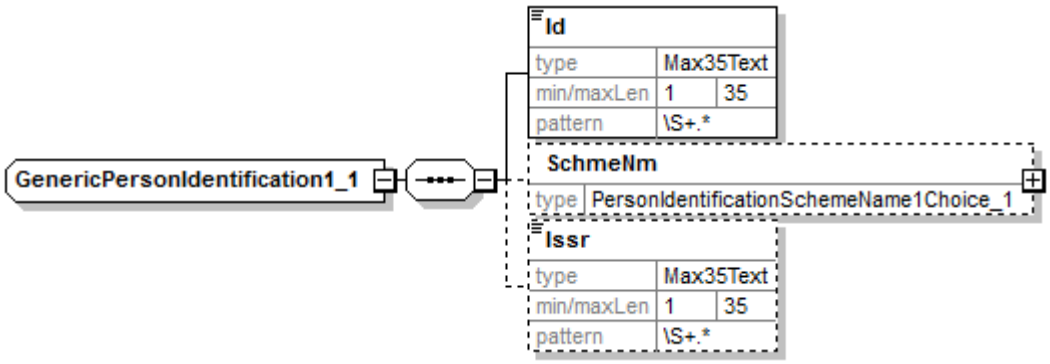
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id** **SchmeNm** **Issr**
used by	element **PersonIdentification5_1/Othr**
source	<xs:complexType name="GenericPersonIdentification1_1"> <xs:sequence> <xs:element name="Id" type="Max35Text"/> <xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_1" minOccurs="0" maxOccurs="1"/> <xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **GenericPersonIdentification1_1/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Id" type="Max35Text"/>

element **GenericPersonIdentification1_1/SchmeNm**

diagram	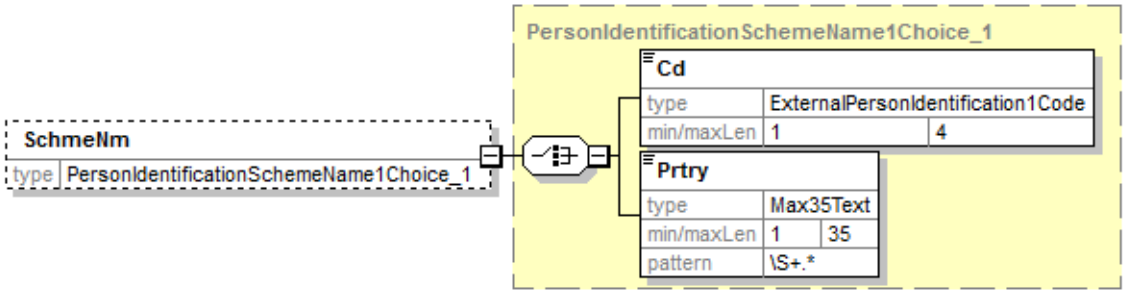
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PersonIdentificationSchemeName1Choice_1**
properties	minOcc 0 maxOcc 1 content complex
children	**Cd** **Prtry**
source	<xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_1" minOccurs="0" maxOccurs="1"/>

element **GenericPersonIdentification1_1/Issr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Issr" type="Max35Text" minOccurs="0" maxOccurs="1"/>

complexType **GenericPersonIdentification1_2**

diagram	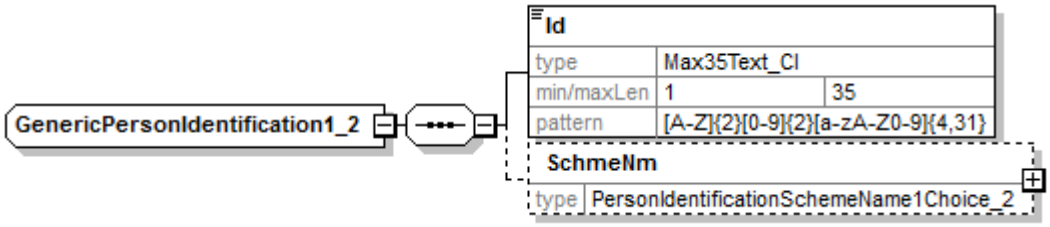
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id** **SchmeNm**
used by	element **PersonIdentification5_2/Othr**
source	<xs:complexType name="GenericPersonIdentification1_2"> <xs:sequence> <xs:element name="Id" type="Max35Text_CI"/> <xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **GenericPersonIdentification1_2/Id**

diagram	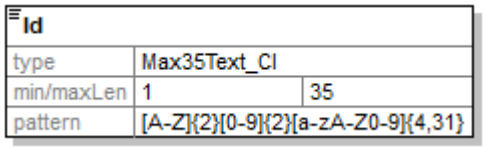
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text_CI**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern [A-Z]{2}[0-9]{2}[a-zA-Z0-9]{4,31}
source	<xs:element name="Id" type="Max35Text_CI"/>

element **GenericPersonIdentification1_2/SchmeNm**

diagram	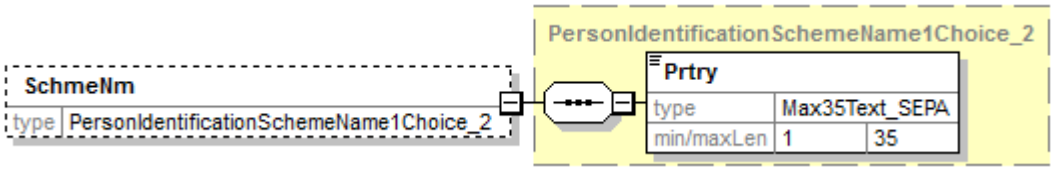
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PersonIdentificationSchemeName1Choice_2**
properties	minOcc 0 maxOcc 1

	content complex
children	**Prtry**
source	<xs:element name="SchmeNm" type="PersonIdentificationSchemeName1Choice_2" minOccurs="0" maxOccurs="1"/>

complexType **GroupHeader39**

diagram	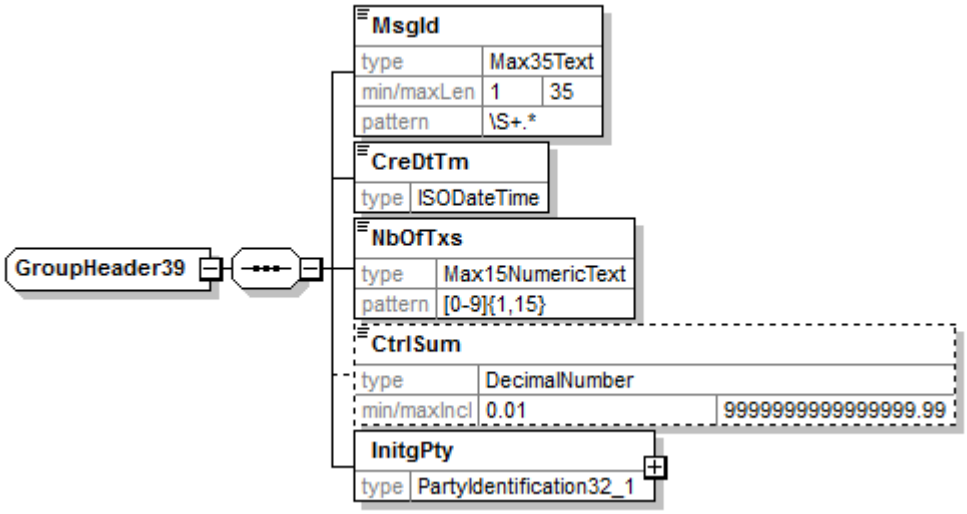
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**MsgId** **CreDtTm** **NbOfTxs** **CtrlSum** **InitgPty**
used by	element **CustomerDirectDebitInitiationV02/GrpHdr**
source	<xs:complexType name="GroupHeader39"> <xs:sequence> <xs:element name="MsgId" type="Max35Text"/> <xs:element name="CreDtTm" type="ISODateTime"/> <xs:element name="NbOfTxs" type="Max15NumericText"/> <xs:element name="CtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/> <xs:element name="InitgPty" type="PartyIdentification32_1"/> </xs:sequence> </xs:complexType>

element **GroupHeader39/MsgId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation

	minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="MsgId" type="Max35Text"/>

element **GroupHeader39/CreDtTm**

diagram	CreDtTm type ISODateTime
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ISODateTime**
properties	content simple
source	<xs:element name="CreDtTm" type="ISODateTime"/>

element **GroupHeader39/NbOfTxs**

diagram	NbOfTxs type Max15NumericText pattern [0-9]{1,15}
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max15NumericText**
properties	content simple
facets	Kind Value Annotation pattern [0-9]{1,15}
source	<xs:element name="NbOfTxs" type="Max15NumericText"/>

element **GroupHeader39/CtrlSum**

diagram	CtrlSum type DecimalNumber min/maxIncl 0.01 9999999999999999.99
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**DecimalNumber**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 0.01 maxInclusive 9999999999999999.99 totalDigits 18 fractionDigits 2

source	<xs:element name="CtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>

element **GroupHeader39/InitgPty**

diagram	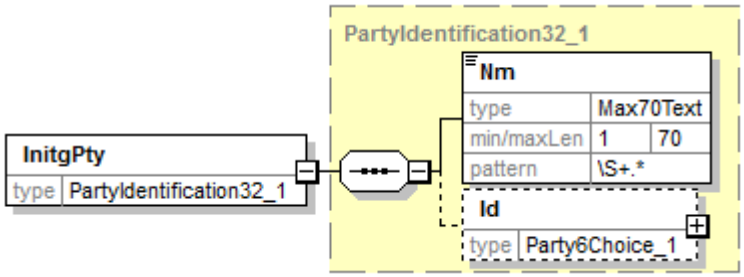
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_1**
properties	content complex
children	**Nm** **Id**
source	<xs:element name="InitgPty" type="PartyIdentification32_1"/>

complexType **LocalInstrument2Choice**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Cd**
used by	element **PaymentTypeInformation20/LclInstrm**
source	<xs:complexType name="LocalInstrument2Choice"> <xs:sequence> <xs:element name="Cd" type="ExternalLocalInstrument1Code"/> </xs:sequence> </xs:complexType>

element **LocalInstrument2Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ExternalLocalInstrument1Code**
properties	content simple
facets	Kind Value Annotation

	minLength 1 maxLength 35 enumeration CORE enumeration B2B
source	<xs:element name="Cd" type="ExternalLocalInstrument1Code"/>

complexType **MandateRelatedInformation6**

diagram	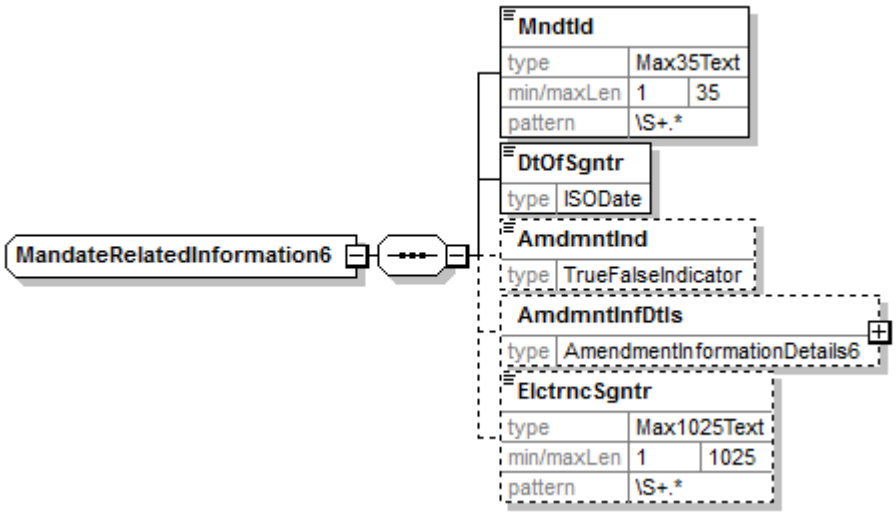
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**MndtId** **DtOfSgntr** **AmdmntInd** **AmdmntInfDtls** **ElctrncSgntr**
used by	element **DirectDebitTransaction6/MndtRltdInf**
source	<xs:complexType name="MandateRelatedInformation6"> <xs:sequence> <xs:element name="MndtId" type="Max35Text" minOccurs="1" maxOccurs="1"/> <xs:element name="DtOfSgntr" type="ISODate" minOccurs="1" maxOccurs="1"/> <xs:element name="AmdmntInd" type="TrueFalseIndicator" minOccurs="0" maxOccurs="1"/> <xs:element name="AmdmntInfDtls" type="AmendmentInformationDetails6" minOccurs="0" maxOccurs="1"/> <xs:element name="ElctrncSgntr" type="Max1025Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **MandateRelatedInformation6/MndtId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**

properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="MndtId" type="Max35Text" minOccurs="1" maxOccurs="1"/>

element **MandateRelatedInformation6/DtOfSgntr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ISODate**
properties	content simple
source	<xs:element name="DtOfSgntr" type="ISODate" minOccurs="1" maxOccurs="1"/>

element **MandateRelatedInformation6/AmdmntInd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**TrueFalseIndicator**
properties	minOcc 0 maxOcc 1 content simple
source	<xs:element name="AmdmntInd" type="TrueFalseIndicator" minOccurs="0" maxOccurs="1"/>

element **MandateRelatedInformation6/AmdmntInfDtls**

diagram	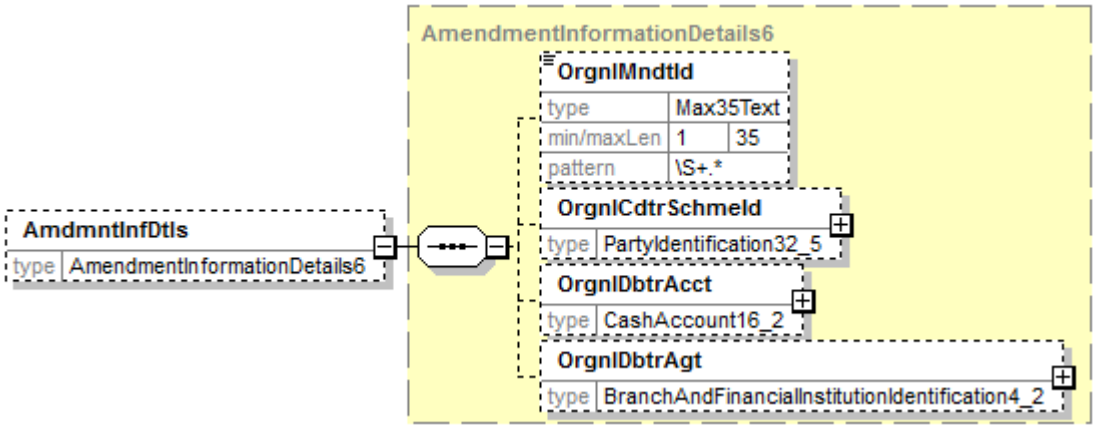
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

type	**AmendmentInformationDetails6**
properties	minOcc 0 maxOcc 1 content complex
children	**OrgnlMndtId** **OrgnlCdtrSchmeId** **OrgnlDbtrAcct** **OrgnlDbtrAgt**
source	<xs:element name="AmdmntInfDtls" type="AmendmentInformationDetails6" minOccurs="0" maxOccurs="1"/>

element **MandateRelatedInformation6/ElctrncSgntr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max1025Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 1025 pattern \S+.*
source	<xs:element name="ElctrncSgntr" type="Max1025Text" minOccurs="0" maxOccurs="1"/>

complexType **OrganisationIdentification4**

diagram	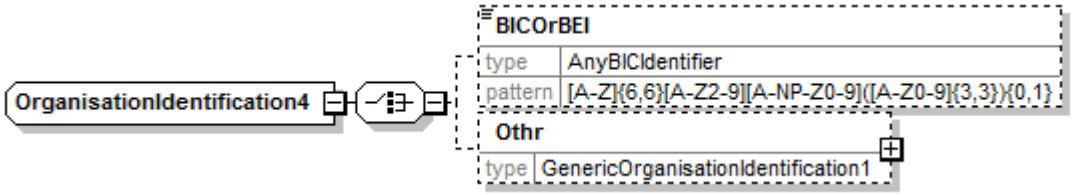
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**BICOrBEI** **Othr**
used by	element **Party6Choice_1/OrgId**
source	<xs:complexType name="OrganisationIdentification4"> <xs:choice> <xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericOrganisationIdentification1" minOccurs="0" maxOccurs="1"/> </xs:choice> </xs:complexType>

element **OrganisationIdentification4/BICOrBEI**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**AnyBICIdentifier**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:element name="BICOrBEI" type="AnyBICIdentifier" minOccurs="0" maxOccurs="1"/>

element **OrganisationIdentification4/Othr**

diagram	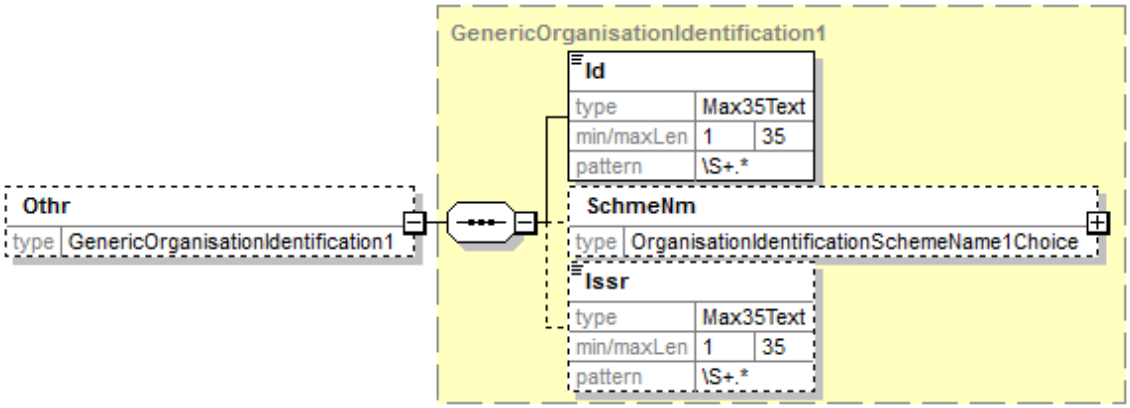
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**GenericOrganisationIdentification1**
properties	minOcc 0 maxOcc 1 content complex
children	**Id SchmeNm Issr**
source	<xs:element name="Othr" type="GenericOrganisationIdentification1" minOccurs="0" maxOccurs="1"/>

complexType **OrganisationIdentificationSchemeName1Choice**

diagram	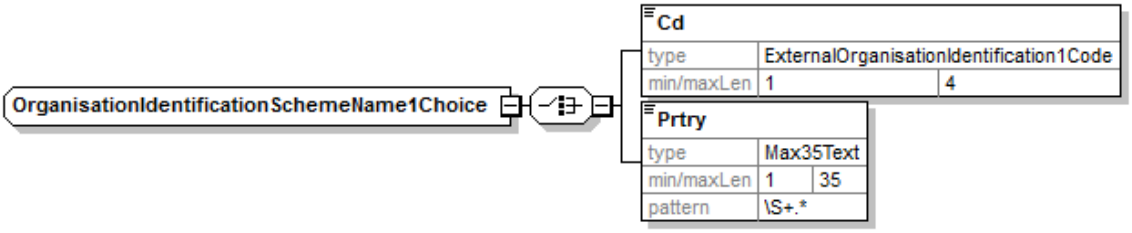
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

children	**Cd** **Prtry**
used by	element **GenericOrganisationIdentification1/SchmeNm**
source	<xs:complexType name="OrganisationIdentificationSchemeName1Choice"> <xs:choice> <xs:element name="Cd" type="ExternalOrganisationIdentification1Code"/> <xs:element name="Prtry" type="Max35Text"/> </xs:choice> </xs:complexType>

element **OrganisationIdentificationSchemeName1Choice/Cd**

diagram	**Cd** type: ExternalOrganisationIdentification1Code min/maxLen: 1 – 4
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ExternalOrganisationIdentification1Code**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 4
source	<xs:element name="Cd" type="ExternalOrganisationIdentification1Code"/>

element **OrganisationIdentificationSchemeName1Choice/Prtry**

diagram	**Prtry** type: Max35Text min/maxLen: 1 – 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="Prtry" type="Max35Text"/>

complexType **Party6Choice_1**

diagram	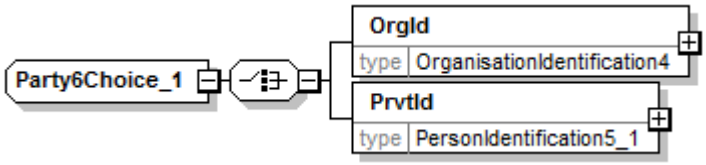
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**OrgId** **PrvtId**
used by	elements **PartyIdentification32_1/Id** **PartyIdentification32_3/Id** **PartyIdentification32_6/Id**

source	`<xs:complexType name="Party6Choice_1">`
	`  <xs:choice>`
	`  <xs:element name="OrgId" type="OrganisationIdentification4"/>`
	`  <xs:element name="PrvtId" type="PersonIdentification5_1"/>`
	`  </xs:choice>`
	`</xs:complexType>`

element **Party6Choice_1/OrgId**

diagram	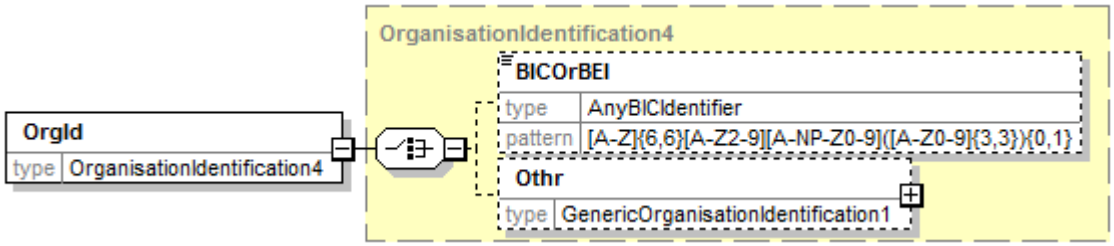
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**OrganisationIdentification4**
properties	content complex
children	**BICOrBEI** **Othr**
source	`<xs:element name="OrgId" type="OrganisationIdentification4"/>`

element **Party6Choice_1/PrvtId**

diagram	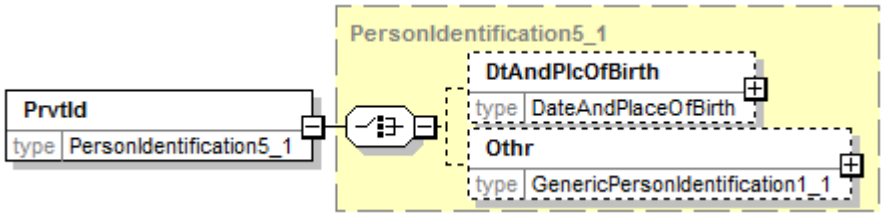
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PersonIdentification5_1**
properties	content complex
children	**DtAndPlcOfBirth** **Othr**

source	<xs:element name="PrvtId" type="PersonIdentification5_1"/>

complexType **Party6Choice_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**PrvtId**
used by	elements **PartyIdentification32_4/Id** **PartyIdentification32_5/Id**
source	<xs:complexType name="Party6Choice_2"> <xs:sequence> <xs:element name="PrvtId" type="PersonIdentification5_2"/> </xs:sequence> </xs:complexType>

element **Party6Choice_2/PrvtId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PersonIdentification5_2**
properties	content complex
children	**Othr**
source	<xs:element name="PrvtId" type="PersonIdentification5_2"/>

complexType **PartyIdentification32_1**

diagram	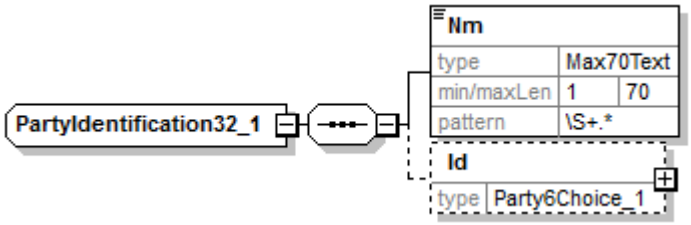
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Nm** **Id**
used by	element **GroupHeader39/InitgPty**
source	<xs:complexType name="PartyIdentification32_1"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/>

```
    <xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

element **PartyIdentification32_1/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max70Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	`<xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/>`

element **PartyIdentification32_1/Id**

diagram	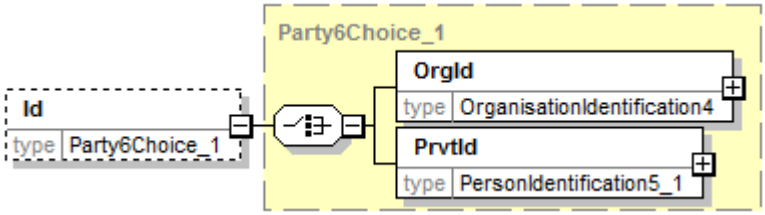
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Party6Choice_1**
properties	minOcc 0 maxOcc 1 content complex
children	**OrgId** **PrvtId**
source	`<xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/>`

complexType **PartyIdentification32_2**

diagram	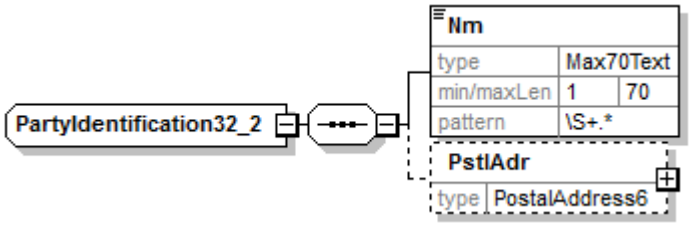

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Nm** **PstlAdr**
used by	element **PaymentInstructionInformation4/Cdtr**
source	<xs:complexType name="PartyIdentification32_2"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/> <xs:element name="PstlAdr" type="PostalAddress6" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_2/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max70Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/>

element **PartyIdentification32_2/PstlAdr**

diagram	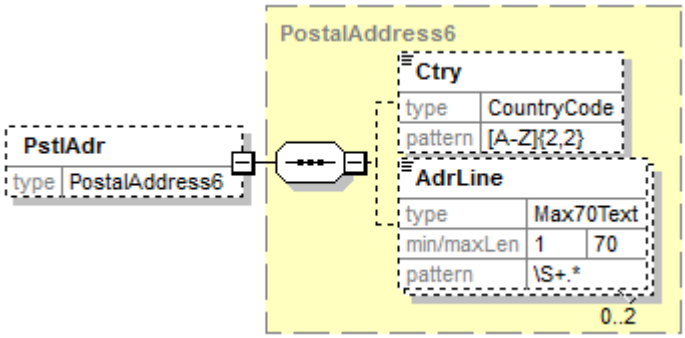
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PostalAddress6**
properties	minOcc 0 maxOcc 1 content complex
children	**Ctry** **AdrLine**
source	<xs:element name="PstlAdr" type="PostalAddress6" minOccurs="0" maxOccurs="1"/>

complexType **PartyIdentification32_3**

diagram	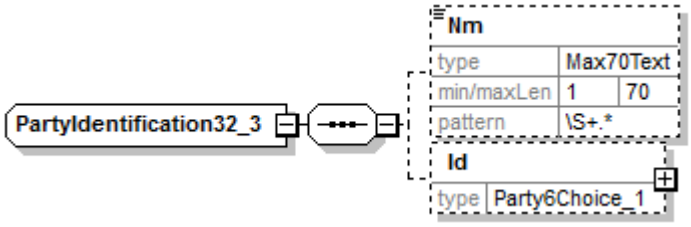
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Nm** **Id**
used by	elements **DirectDebitTransactionInformation9/UltmtCdtr** **PaymentInstructionInformation4/UltmtCdtr** **DirectDebitTransactionInformation9/UltmtDbtr**

source	`<xs:complexType name="PartyIdentification32_3">`
	`  <xs:sequence>`
	`  <xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/>`
	`  <xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **PartyIdentification32_3/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max70Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	`<xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/>`

element **PartyIdentification32_3/Id**

diagram	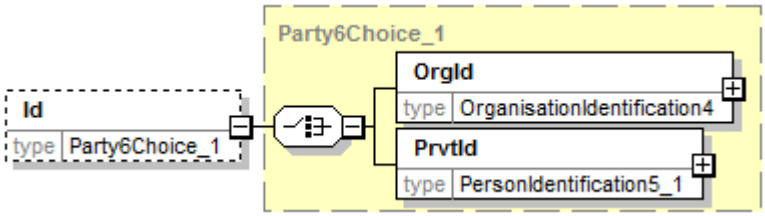

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Party6Choice_1**
properties	minOcc 0 maxOcc 1 content complex
children	**OrgId** **PrvtId**
source	<xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/>

complexType **PartyIdentification32_4**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Id**
used by	elements **DirectDebitTransaction6/CdtrSchmeId** **PaymentInstructionInformation4/CdtrSchmeId**
source	<xs:complexType name="PartyIdentification32_4"> <xs:sequence> <xs:element name="Id" type="Party6Choice_2" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_4/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Party6Choice_2**
properties	content complex
children	**PrvtId**
source	<xs:element name="Id" type="Party6Choice_2" minOccurs="1" maxOccurs="1"/>

complexType **PartyIdentification32_5**

diagram	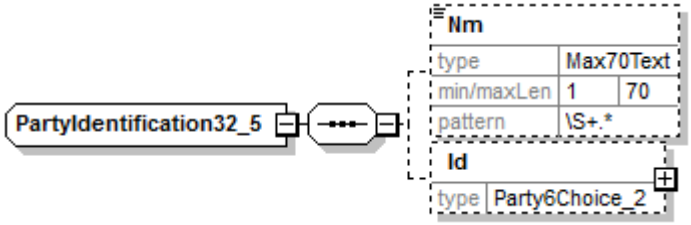
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

children	**Nm** **Id**
used by	element **AmendmentInformationDetails6/OrgnlCdtrSchmeId**
source	<xs:complexType name="PartyIdentification32_5"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_5/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max70Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="Nm" type="Max70Text" minOccurs="0" maxOccurs="1"/>

element **PartyIdentification32_5/Id**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Party6Choice_2**
properties	minOcc 0 maxOcc 1 content complex
children	**PrvtId**
source	<xs:element name="Id" type="Party6Choice_2" minOccurs="0" maxOccurs="1"/>

complexType **PartyIdentification32_6**

diagram	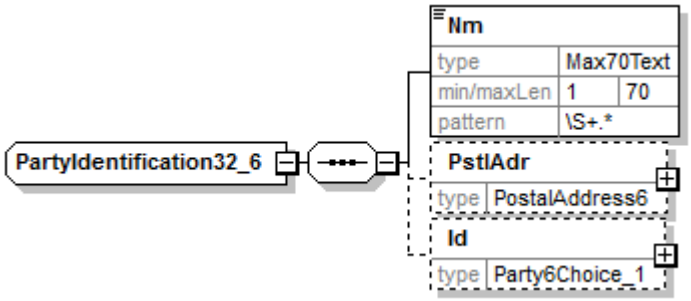
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Nm** **PstlAdr** **Id**
used by	element **DirectDebitTransactionInformation9/Dbtr**
source	<xs:complexType name="PartyIdentification32_6"> <xs:sequence> <xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/> <xs:element name="PstlAdr" type="PostalAddress6" minOccurs="0" maxOccurs="1"/> <xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PartyIdentification32_6/Nm**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max70Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="Nm" type="Max70Text" minOccurs="1" maxOccurs="1"/>

element **PartyIdentification32_6/PstlAdr**

diagram	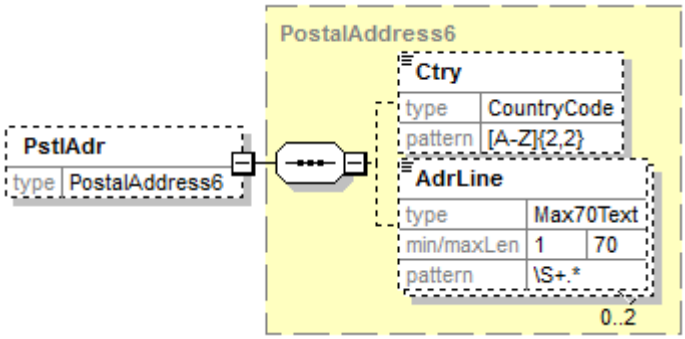
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PostalAddress6**
properties	minOcc 0 maxOcc 1 content complex
children	**Ctry** **AdrLine**
source	<xs:element name="PstlAdr" type="PostalAddress6" minOccurs="0" maxOccurs="1"/>

element **PartyIdentification32_6/Id**

diagram	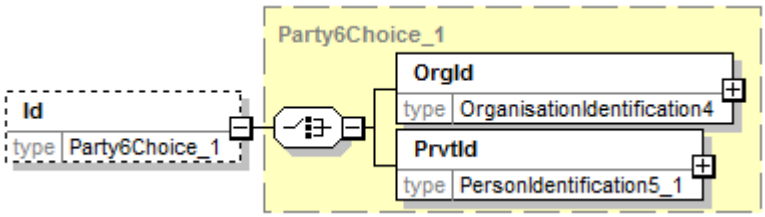
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Party6Choice_1**
properties	minOcc 0 maxOcc 1 content complex
children	**OrgId** **PrvtId**
source	<xs:element name="Id" type="Party6Choice_1" minOccurs="0" maxOccurs="1"/>

complexType **PaymentIdentification1**

diagram	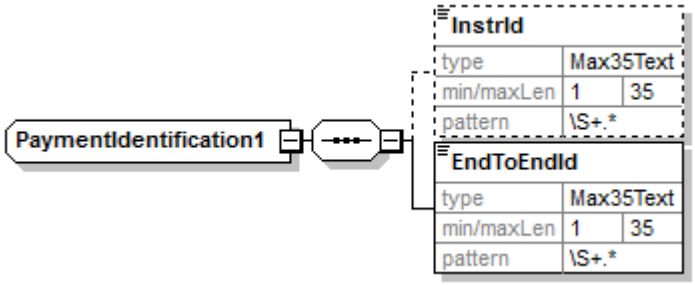

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**InstrId** **EndToEndId**
used by	element **DirectDebitTransactionInformation9/PmtId**
source	<xs:complexType name="PaymentIdentification1"> <xs:sequence> <xs:element name="InstrId" type="Max35Text" minOccurs="0" maxOccurs="1"/> <xs:element name="EndToEndId" type="Max35Text"/> </xs:sequence> </xs:complexType>

element **PaymentIdentification1/InstrId**

diagram	**InstrId** type: Max35Text min/maxLen: 1 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="InstrId" type="Max35Text" minOccurs="0" maxOccurs="1"/>

element **PaymentIdentification1/EndToEndId**

diagram	**EndToEndId** type: Max35Text min/maxLen: 1 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:element name="EndToEndId" type="Max35Text"/>

complexType **PaymentInstructionInformation4**

diagram

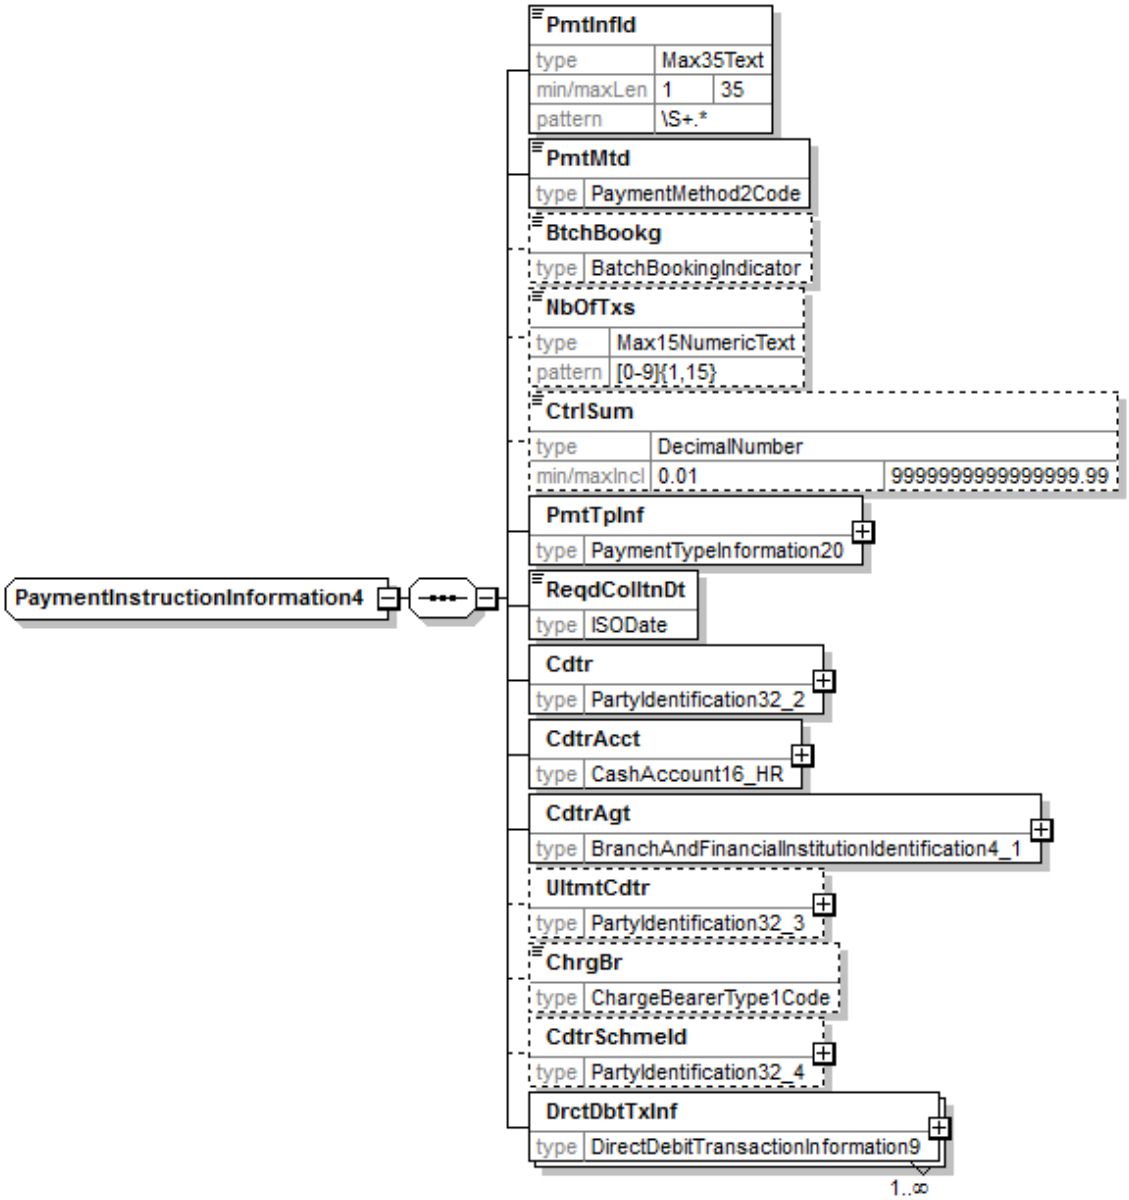

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**PmtInfId** **PmtMtd** **BtchBookg** **NbOfTxs** **CtrlSum** **PmtTpInf** **ReqdCollItnDt** **Cdtr** **CdtrAcct** **CdtrAgt** **UltmtCdtr** **ChrgBr** **CdtrSchmeId** **DrctDbtTxInf**
used by	element **CustomerDirectDebitInitiationV02/PmtInf**

source

```
<xs:complexType name="PaymentInstructionInformation4">
  <xs:sequence>
    <xs:element name="PmtInfId" type="Max35Text"/>
    <xs:element name="PmtMtd" type="PaymentMethod2Code"/>
    <xs:element name="BtchBookg" type="BatchBookingIndicator" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="NbOfTxs" type="Max15NumericText" minOccurs="0" maxOccurs="1"/>
    <xs:element name="CtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>
    <xs:element name="PmtTpInf" type="PaymentTypeInformation20" minOccurs="1"
```

```
maxOccurs="1"/>
    <xs:element name="ReqdColltnDt" type="ISODate"/>
    <xs:element name="Cdtr" type="PartyIdentification32_2"/>
    <xs:element name="CdtrAcct" type="CashAccount16_HR"/>
    <xs:element name="CdtrAgt" type="BranchAndFinancialInstitutionIdentification4_1"/>
    <xs:element name="UltmtCdtr" type="PartyIdentification32_3" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="ChrgBr" type="ChargeBearerType1Code" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="CdtrSchmeId" type="PartyIdentification32_4" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="DrctDbtTxInf" type="DirectDebitTransactionInformation9" minOccurs="1"
maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

element **PaymentInstructionInformation4/PmtInfId**

diagram	**PmtInfId** type: Max35Text min/maxLen: 1 35 pattern: \S+.*
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	`<xs:element name="PmtInfId" type="Max35Text"/>`

element **PaymentInstructionInformation4/PmtMtd**

diagram	**PmtMtd** type: PaymentMethod2Code
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PaymentMethod2Code**
properties	content simple
facets	Kind / Value / Annotation enumeration DD
source	`<xs:element name="PmtMtd" type="PaymentMethod2Code"/>`

element **PaymentInstructionInformation4/BtchBookg**

diagram	BtchBookg type BatchBookingIndicator
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**BatchBookingIndicator**
properties	minOcc 0 maxOcc 1 content simple
source	<xs:element name="BtchBookg" type="BatchBookingIndicator" minOccurs="0" maxOccurs="1"/>

element **PaymentInstructionInformation4/NbOfTxs**

diagram	NbOfTxs type Max15NumericText pattern [0-9]{1,15}
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max15NumericText**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [0-9]{1,15}
source	<xs:element name="NbOfTxs" type="Max15NumericText" minOccurs="0" maxOccurs="1"/>

element **PaymentInstructionInformation4/CtrlSum**

diagram	CtrlSum type DecimalNumber min/maxIncl 0.01 9999999999999999.99
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**DecimalNumber**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 0.01 maxInclusive 9999999999999999.99 totalDigits 18 fractionDigits 2
source	<xs:element name="CtrlSum" type="DecimalNumber" minOccurs="0" maxOccurs="1"/>

element **PaymentInstructionInformation4/PmtTpInf**

diagram	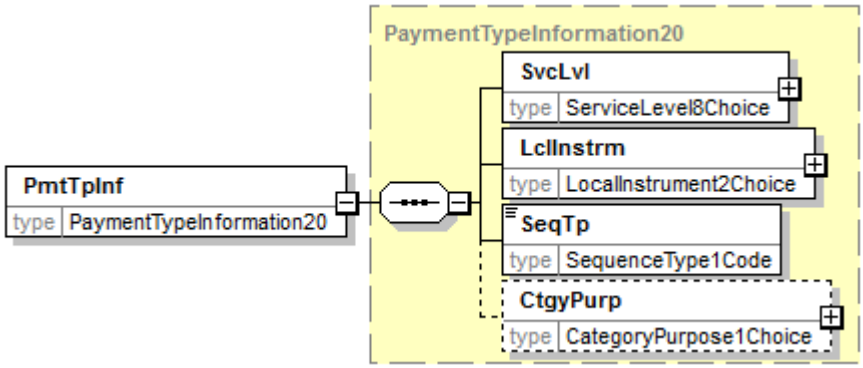
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PaymentTypeInformation20**
properties	content complex
children	**SvcLvl** **LclInstrm** **SeqTp** **CtgyPurp**
source	<xs:element name="PmtTpInf" type="PaymentTypeInformation20" minOccurs="1" maxOccurs="1"/>

element **PaymentInstructionInformation4/ReqdColltnDt**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ISODate**
properties	content simple
source	<xs:element name="ReqdColltnDt" type="ISODate"/>

element **PaymentInstructionInformation4/Cdtr**

diagram	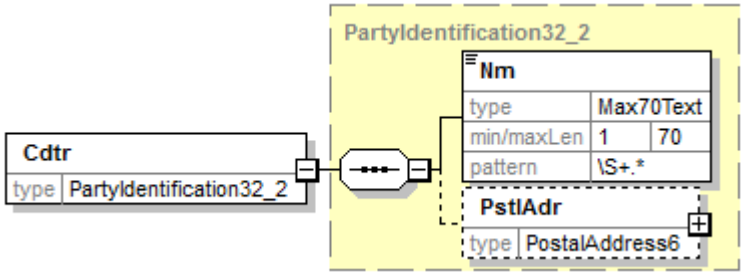
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_2**
properties	content complex
children	**Nm** **PstlAdr**

source	<xs:element name="Cdtr" type="PartyIdentification32_2"/>

element **PaymentInstructionInformation4/CdtrAcct**

diagram	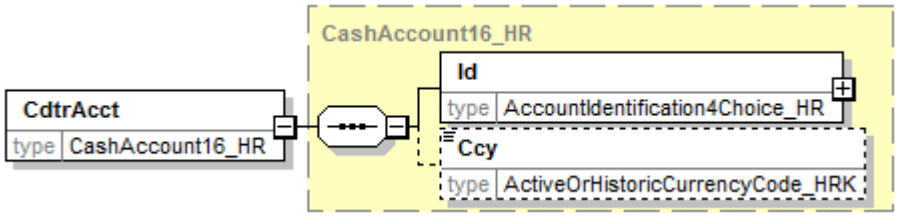
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CashAccount16_HR**
properties	content complex
children	**Id** **Ccy**
source	<xs:element name="CdtrAcct" type="CashAccount16_HR"/>

element **PaymentInstructionInformation4/CdtrAgt**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**BranchAndFinancialInstitutionIdentification4_1**
properties	content complex
children	**FinInstnId**
source	<xs:element name="CdtrAgt" type="BranchAndFinancialInstitutionIdentification4_1"/>

element **PaymentInstructionInformation4/UltmtCdtr**

diagram	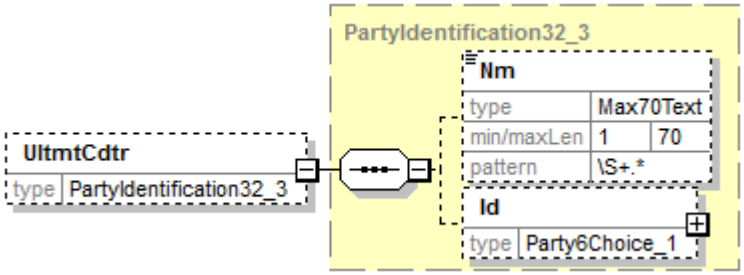
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_3**
properties	minOcc 0 maxOcc 1

	content complex
children	**Nm** **Id**
source	<xs:element name="UltmtCdtr" type="PartyIdentification32_3" minOccurs="0" maxOccurs="1"/>

element **PaymentInstructionInformation4/ChrgBr**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ChargeBearerType1Code**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration SLEV
source	<xs:element name="ChrgBr" type="ChargeBearerType1Code" minOccurs="0" maxOccurs="1"/>

element **PaymentInstructionInformation4/CdtrSchmeId**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**PartyIdentification32_4**
properties	minOcc 0 maxOcc 1 content complex
children	**Id**
source	<xs:element name="CdtrSchmeId" type="PartyIdentification32_4" minOccurs="0" maxOccurs="1"/>

element **PaymentInstructionInformation4/DrctDbtTxInf**

diagram	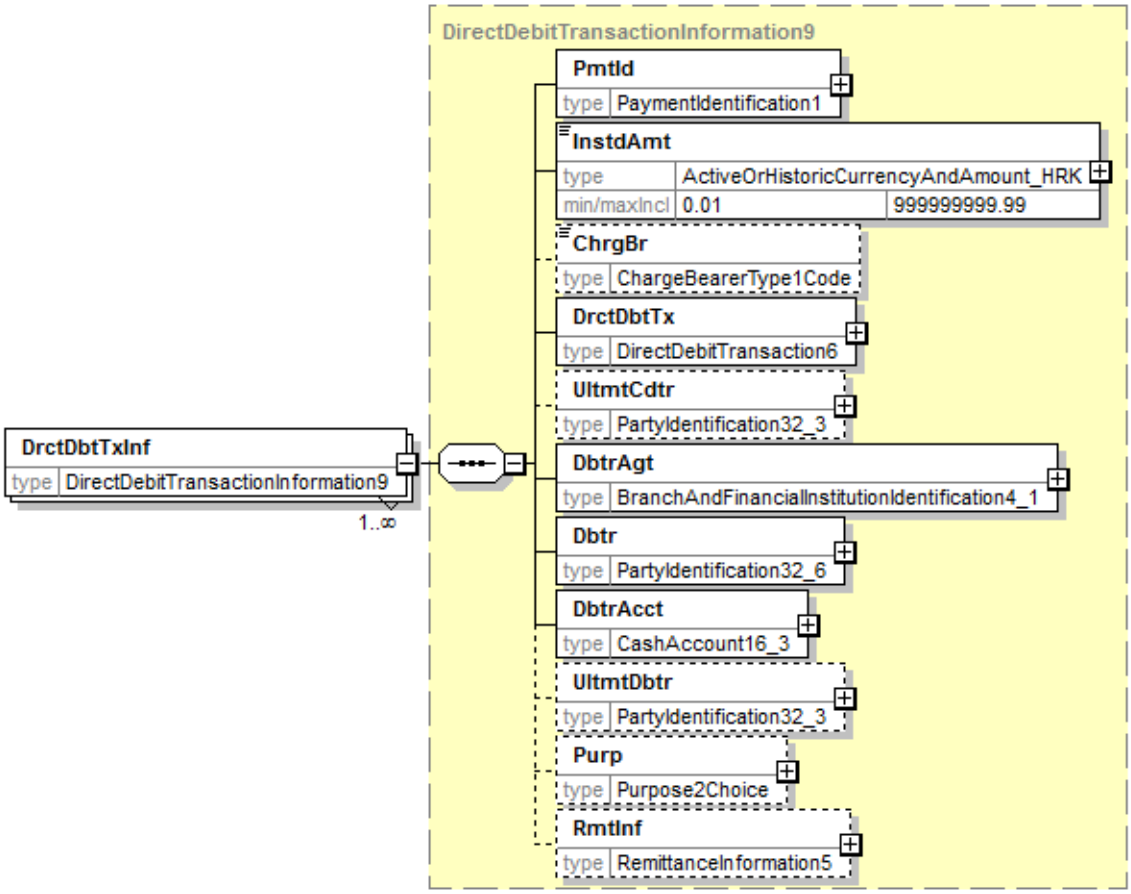
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**DirectDebitTransactionInformation9**
properties	minOcc 1 maxOcc unbounded content complex
children	**PmtId** **InstdAmt** **ChrgBr** **DrctDbtTx** **UltmtCdtr** **DbtrAgt** **Dbtr** **DbtrAcct** **UltmtDbtr** **Purp** **RmtInf**
source	<xs:element name="DrctDbtTxInf" type="DirectDebitTransactionInformation9" minOccurs="1" maxOccurs="unbounded"/>

complexType **PaymentTypeInformation20**

diagram	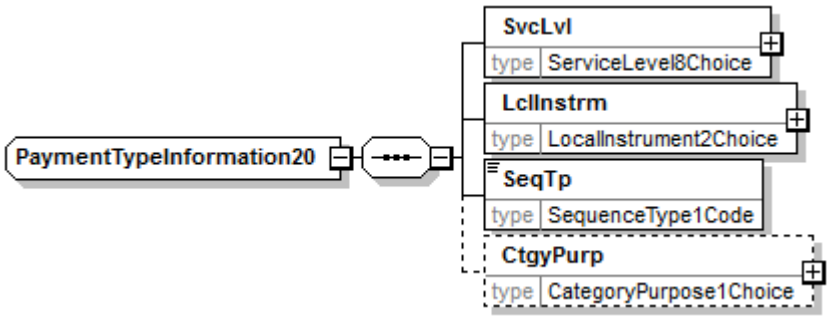

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**SvcLvl** **LclInstrm** **SeqTp** **CtgyPurp**
used by	element **PaymentInstructionInformation4/PmtTpInf**
source	<xs:complexType name="PaymentTypeInformation20"> <xs:sequence> <xs:element name="SvcLvl" type="ServiceLevel8Choice" minOccurs="1" maxOccurs="1"/> <xs:element name="LclInstrm" type="LocalInstrument2Choice" minOccurs="1" maxOccurs="1"/> <xs:element name="SeqTp" type="SequenceType1Code" minOccurs="1" maxOccurs="1"/> <xs:element name="CtgyPurp" type="CategoryPurpose1Choice" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PaymentTypeInformation20/SvcLvl**

diagram	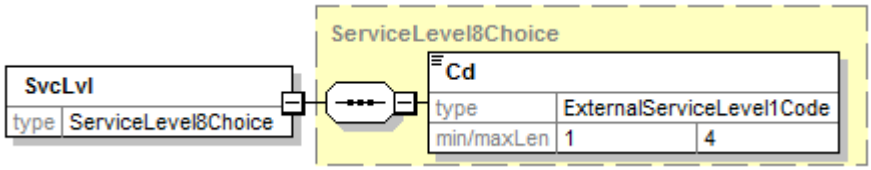
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ServiceLevel8Choice**
properties	content complex
children	**Cd**
source	<xs:element name="SvcLvl" type="ServiceLevel8Choice" minOccurs="1" maxOccurs="1"/>

element **PaymentTypeInformation20/LclInstrm**

diagram	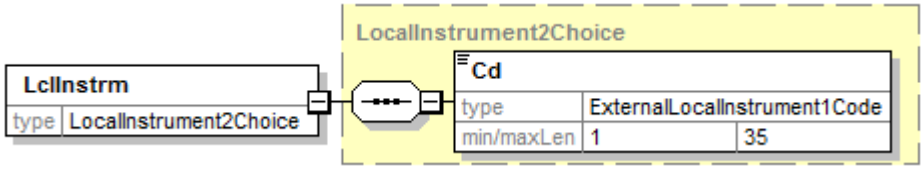
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**LocalInstrument2Choice**
properties	content complex
children	**Cd**
source	<xs:element name="LclInstrm" type="LocalInstrument2Choice" minOccurs="1" maxOccurs="1"/>

element **PaymentTypeInformation20/SeqTp**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**SequenceType1Code**
properties	content simple
facets	Kind / Value / Annotation enumeration FRST enumeration RCUR enumeration FNAL enumeration OOFF
source	<xs:element name="SeqTp" type="SequenceType1Code" minOccurs="1" maxOccurs="1"/>

element **PaymentTypeInformation20/CtgyPurp**

diagram	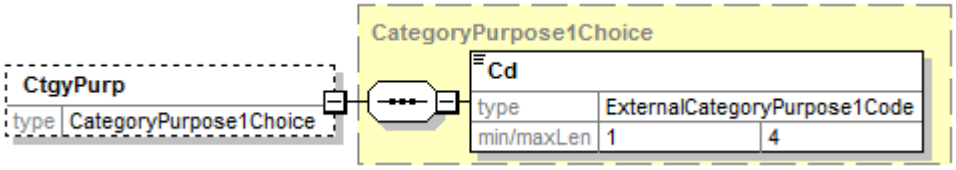
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CategoryPurpose1Choice**
properties	minOcc 0 maxOcc 1 content complex
children	**Cd**
source	<xs:element name="CtgyPurp" type="CategoryPurpose1Choice" minOccurs="0" maxOccurs="1"/>

complexType **PersonIdentification5_1**

diagram	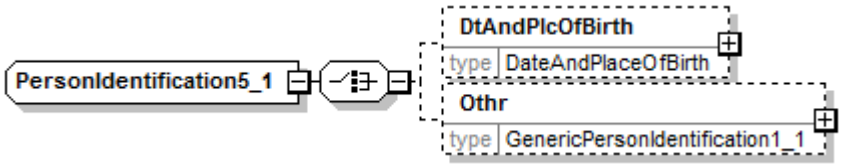
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**DtAndPlcOfBirth** **Othr**
used by	element **Party6Choice_1/PrvtId**
source	<xs:complexType name="PersonIdentification5_1"> <xs:choice> <xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/> <xs:element name="Othr" type="GenericPersonIdentification1_1" minOccurs="0" maxOccurs="1"/>

```
  </xs:choice>
</xs:complexType>
```

element **PersonIdentification5_1/DtAndPlcOfBirth**

diagram

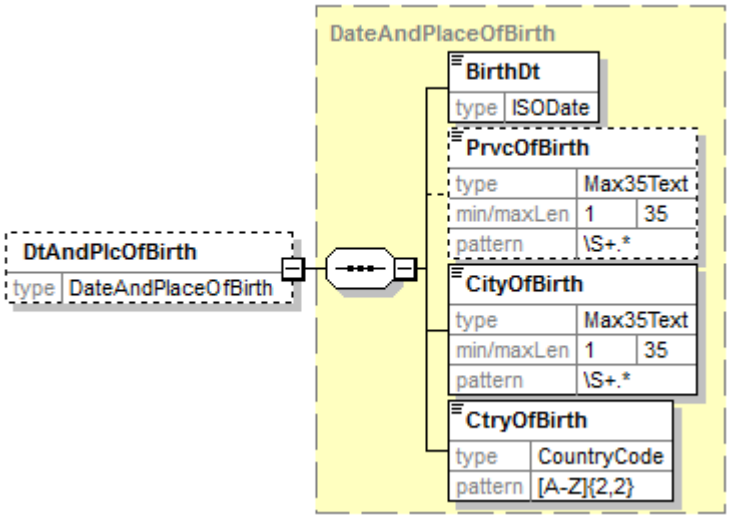

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**DateAndPlaceOfBirth**
properties	minOcc 0 maxOcc 1 content complex
children	**BirthDt** **PrvcOfBirth** **CityOfBirth** **CtryOfBirth**
source	`<xs:element name="DtAndPlcOfBirth" type="DateAndPlaceOfBirth" minOccurs="0" maxOccurs="1"/>`

element **PersonIdentification5_1/Othr**

diagram

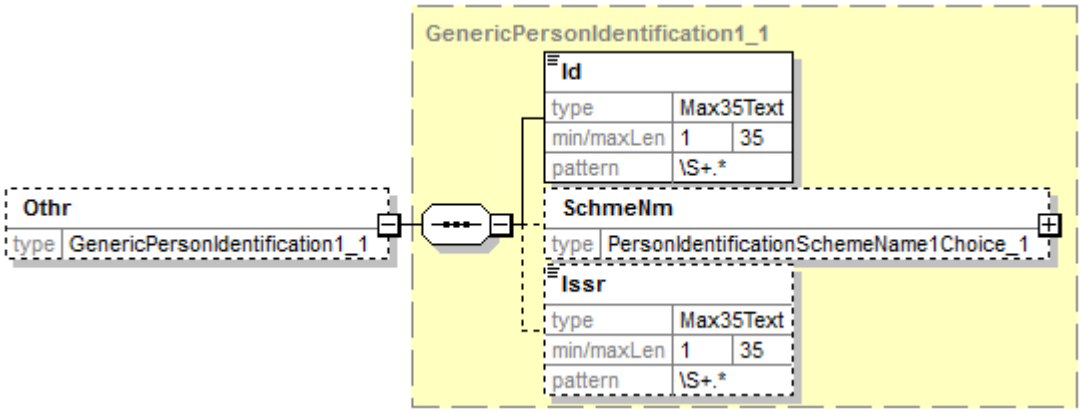

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**GenericPersonIdentification1_1**
properties	minOcc 0 maxOcc 1

	content complex
children	**Id** **SchmeNm** **Issr**
source	<xs:element name="Othr" type="GenericPersonIdentification1_1" minOccurs="0" maxOccurs="1"/>

complexType **PersonIdentification5_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Othr**
used by	element **Party6Choice_2/PrvtId**
source	<xs:complexType name="PersonIdentification5_2"> <xs:sequence> <xs:element name="Othr" type="GenericPersonIdentification1_2" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **PersonIdentification5_2/Othr**

diagram	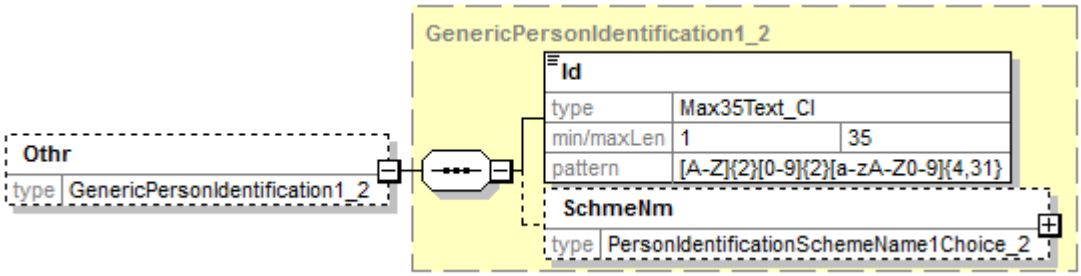
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**GenericPersonIdentification1_2**
properties	minOcc 0 maxOcc 1 content complex
children	**Id** **SchmeNm**
source	<xs:element name="Othr" type="GenericPersonIdentification1_2" minOccurs="0" maxOccurs="1"/>

complexType **PersonIdentificationSchemeName1Choice_1**

diagram	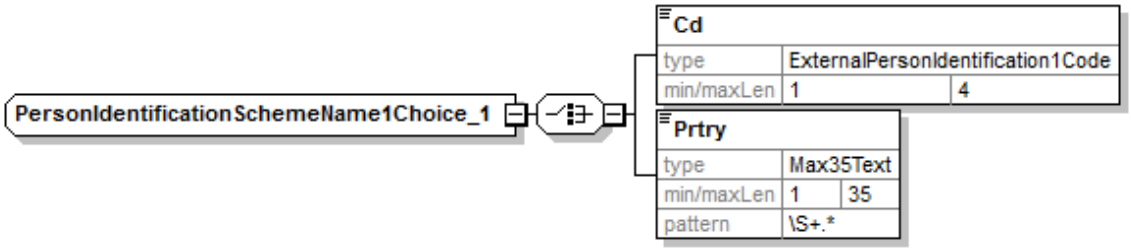
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Cd** **Prtry**
used by	element **GenericPersonIdentification1_1/SchmeNm**

source	`<xs:complexType name="PersonIdentificationSchemeName1Choice_1">`
	`  <xs:choice>`
	`  <xs:element name="Cd" type="ExternalPersonIdentification1Code"/>`
	`  <xs:element name="Prtry" type="Max35Text"/>`
	`  </xs:choice>`
	`</xs:complexType>`

element **PersonIdentificationSchemeName1Choice_1/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ExternalPersonIdentification1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4
source	`<xs:element name="Cd" type="ExternalPersonIdentification1Code"/>`

element **PersonIdentificationSchemeName1Choice_1/Prtry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35

	pattern \S+.*
source	<xs:element name="Prtry" type="Max35Text"/>

complexType **PersonIdentificationSchemeName1Choice_2**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Prtry**
used by	element **GenericPersonIdentification1_2/SchmeNm**
source	<xs:complexType name="PersonIdentificationSchemeName1Choice_2"> <xs:sequence> <xs:element name="Prtry" type="Max35Text_SEPA"/> </xs:sequence> </xs:complexType>

element **PersonIdentificationSchemeName1Choice_2/Prtry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max35Text_SEPA**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35 enumeration SEPA
source	<xs:element name="Prtry" type="Max35Text_SEPA"/>

complexType **PostalAddress6**

diagram	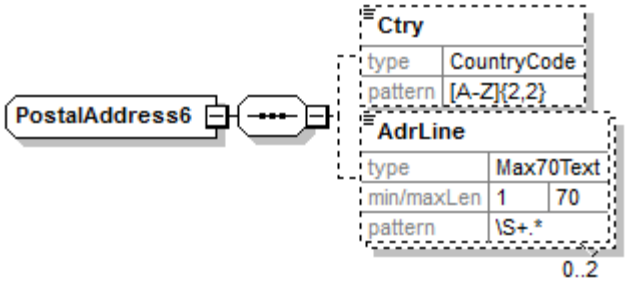
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

children	**Ctry** **AdrLine**
used by	elements **PartyIdentification32_2/PstlAdr** **PartyIdentification32_6/PstlAdr**
source	<xs:complexType name="PostalAddress6"> <xs:sequence> <xs:element name="Ctry" type="CountryCode" minOccurs="0" maxOccurs="1"/> <xs:element name="AdrLine" type="Max70Text" minOccurs="0" maxOccurs="2"/> </xs:sequence> </xs:complexType>

element **PostalAddress6/Ctry**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CountryCode**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern [A-Z]{2,2}
source	<xs:element name="Ctry" type="CountryCode" minOccurs="0" maxOccurs="1"/>

element **PostalAddress6/AdrLine**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max70Text**
properties	minOcc 0 maxOcc 2 content simple
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*
source	<xs:element name="AdrLine" type="Max70Text" minOccurs="0" maxOccurs="2"/>

complexType **Purpose2Choice**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Cd**
used by	element **DirectDebitTransactionInformation9/Purp**

source	`<xs:complexType name="Purpose2Choice">`
	`  <xs:sequence>`
	`  <xs:element name="Cd" type="ExternalPurpose1Code"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **Purpose2Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ExternalPurpose1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4
source	`<xs:element name="Cd" type="ExternalPurpose1Code"/>`

complexType **RemittanceInformation5**

diagram	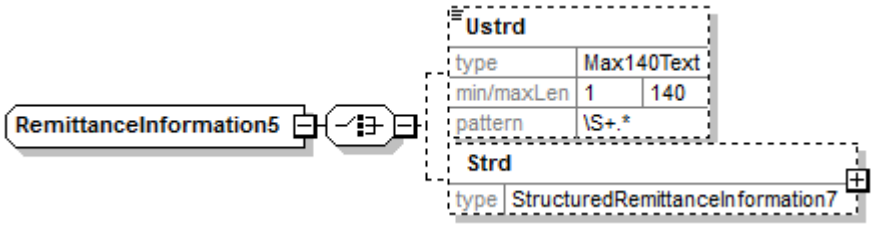
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**Ustrd** **Strd**
used by	element **DirectDebitTransactionInformation9/RmtInf**

source	`<xs:complexType name="RemittanceInformation5">`
	`  <xs:choice>`
	`  <xs:element name="Ustrd" type="Max140Text" minOccurs="0" maxOccurs="1"/>`
	`  <xs:element name="Strd" type="StructuredRemittanceInformation7" minOccurs="0" maxOccurs="1"/>`

	<xs:choice> </xs:complexType>

element **RemittanceInformation5/Ustrd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max140Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 140 pattern \S+.*
source	<xs:element name="Ustrd" type="Max140Text" minOccurs="0" maxOccurs="1"/>

element **RemittanceInformation5/Strd**

diagram	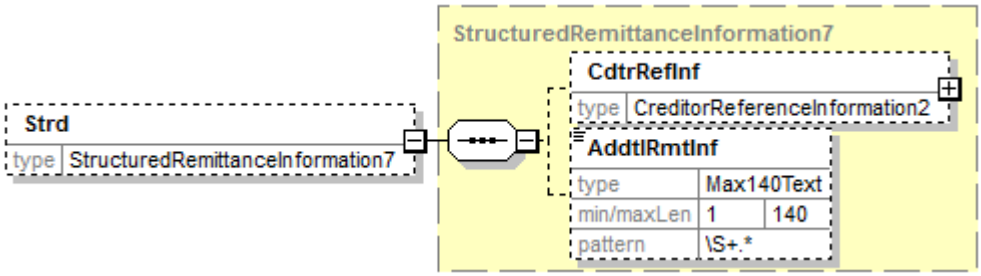
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**StructuredRemittanceInformation7**
properties	minOcc 0 maxOcc 1 content complex
children	**CdtrRefInf** **AddtlRmtInf**
source	<xs:element name="Strd" type="StructuredRemittanceInformation7" minOccurs="0" maxOccurs="1"/>

complexType **ServiceLevel8Choice**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

children	**Cd**
used by	element **PaymentTypeInformation20/SvcLvl**
source	<xs:complexType name="ServiceLevel8Choice"> <xs:sequence> <xs:element name="Cd" type="ExternalServiceLevel1Code"/> </xs:sequence> </xs:complexType>

element **ServiceLevel8Choice/Cd**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**ExternalServiceLevel1Code**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 4 enumeration SEPA
source	<xs:element name="Cd" type="ExternalServiceLevel1Code"/>

complexType **StructuredRemittanceInformation7**

diagram	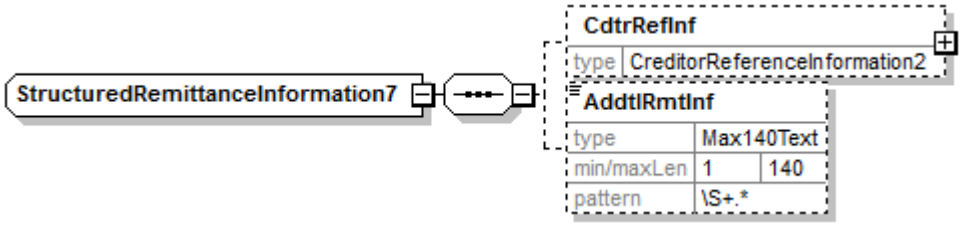
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
children	**CdtrRefInf** **AddtlRmtInf**
used by	element **RemittanceInformation5/Strd**
source	<xs:complexType name="StructuredRemittanceInformation7"> <xs:sequence> <xs:element name="CdtrRefInf" type="CreditorReferenceInformation2" minOccurs="0" maxOccurs="1"/> <xs:element name="AddtlRmtInf" type="Max140Text" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

element **StructuredRemittanceInformation7/CdtrRefInf**

diagram	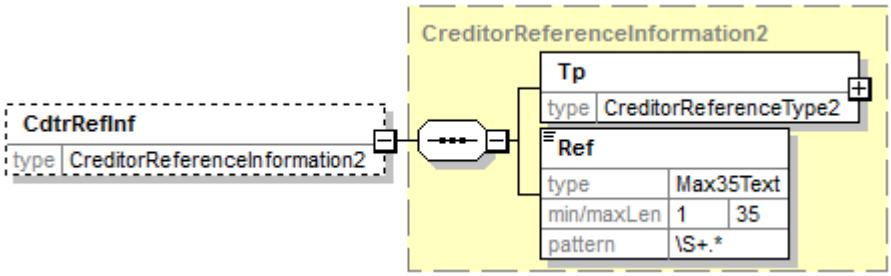
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**CreditorReferenceInformation2**
properties	minOcc 0 maxOcc 1 content complex
children	**Tp** **Ref**
source	<xs:element name="CdtrRefInf" type="CreditorReferenceInformation2" minOccurs="0" maxOccurs="1"/>

element **StructuredRemittanceInformation7/AddtlRmtInf**

diagram	
namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**Max140Text**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 140 pattern \S+.*
source	<xs:element name="AddtlRmtInf" type="Max140Text" minOccurs="0" maxOccurs="1"/>

simpleType **ActiveOrHistoricCurrencyAndAmount_SimpleType**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:decimal**
properties	base xs:decimal
used by	complexType **ActiveOrHistoricCurrencyAndAmount_HRK**
facets	Kind Value Annotation minInclusive 0.01 maxInclusive 999999999.99 totalDigits 11

	fractionDigits 2 whiteSpace collapse
source	<xs:simpleType name="ActiveOrHistoricCurrencyAndAmount_SimpleType"> <xs:restriction base="xs:decimal"> <xs:minInclusive value="0.01"/> <xs:fractionDigits value="2"/> <xs:totalDigits value="11"/> <xs:maxInclusive value="999999999.99"/> <xs:whiteSpace value="collapse"/> </xs:restriction> </xs:simpleType>

simpleType **ActiveOrHistoricCurrencyCode_HRK**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **CashAccount16_HR/Ccy** attribute **ActiveOrHistoricCurrencyAndAmount_HRK/@Ccy**
facets	Kind Value Annotation enumeration HRK enumeration EUR
source	<xs:simpleType name="ActiveOrHistoricCurrencyCode_HRK"> <xs:restriction base="xs:string"> <xs:enumeration value="HRK"/> <xs:enumeration value="EUR"/> </xs:restriction> </xs:simpleType>

simpleType **AnyBICIdentifier**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **OrganisationIdentification4/BICOrBEI**
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:simpleType name="AnyBICIdentifier"> <xs:restriction base="xs:string"> <xs:pattern value="[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}"/> </xs:restriction> </xs:simpleType>

simpleType **BatchBookingIndicator**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**xs:boolean**

properties	base xs:boolean
used by	element **PaymentInstructionInformation4/BtchBookg**
source	<xs:simpleType name="BatchBookingIndicator"> <xs:restriction base="xs:boolean"/> </xs:simpleType>

simpleType **BICIdentifier**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	elements **FinancialInstitutionIdentification7_1/BIC** **FinancialInstitutionIdentification7_2/BIC**
facets	Kind Value Annotation pattern [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
source	<xs:simpleType name="BICIdentifier">\ <xs:restriction base="xs:string">\ <xs:pattern value="[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}"/> </xs:restriction> </xs:simpleType>

simpleType **ChargeBearerType1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	elements **DirectDebitTransactionInformation9/ChrgBr** **PaymentInstructionInformation4/ChrgBr**
facets	Kind Value Annotation enumeration SLEV
source	<xs:simpleType name="ChargeBearerType1Code">\ <xs:restriction base="xs:string">\ <xs:enumeration value="SLEV"/> </xs:restriction> </xs:simpleType>

simpleType **CountryCode**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	elements **PostalAddress6/Ctry** **DateAndPlaceOfBirth/CtryOfBirth**
facets	Kind Value Annotation pattern [A-Z]{2,2}
source	<xs:simpleType name="CountryCode">\ <xs:restriction base="xs:string">\ <xs:pattern value="[A-Z]{2,2}"/>

```
  </xs:restriction>
</xs:simpleType>
```

simpleType **DecimalNumber**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:decimal**
properties	base xs:decimal
used by	elements **GroupHeader39/CtrlSum** **PaymentInstructionInformation4/CtrlSum**
facets	Kind Value Annotation minInclusive 0.01 maxInclusive 9999999999999999.99 totalDigits 18 fractionDigits 2

source	`<xs:simpleType name="DecimalNumber">`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:fractionDigits value="2"/>`
	`  <xs:totalDigits value="18"/>`
	`  <xs:minInclusive value="0.01"/>`
	`  <xs:maxInclusive value="9999999999999999.99"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **DocumentType3Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **CreditorReferenceType1Choice/Cd**
facets	Kind Value Annotation enumeration SCOR

source	`<xs:simpleType name="DocumentType3Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="SCOR"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ExternalAccountIdentification1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation minLength 1 maxLength 4
source	`<xs:simpleType name="ExternalAccountIdentification1Code">`

```
  <xs:restriction base="xs:string">
    <xs:minLength value="1"/>
    <xs:maxLength value="4"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ExternalCategoryPurpose1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **CategoryPurpose1Choice/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4

source	`<xs:simpleType name="ExternalCategoryPurpose1Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="4"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ExternalFinancialInstitutionIdentification1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **FinancialIdentificationSchemeName1Choice/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4

source	`<xs:simpleType name="ExternalFinancialInstitutionIdentification1Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="4"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ExternalLocalInstrument1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **LocalInstrument2Choice/Cd**
facets	Kind Value Annotation minLength 1

	maxLength 35 enumeration CORE enumeration B2B
source	<xs:simpleType name="ExternalLocalInstrument1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> <xs:enumeration value="CORE"/> <xs:enumeration value="B2B"/> </xs:restriction> </xs:simpleType>

simpleType **ExternalOrganisationIdentification1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **OrganisationIdentificationSchemeName1Choice/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4
source	<xs:simpleType name="ExternalOrganisationIdentification1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType>

simpleType **ExternalPersonIdentification1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **PersonIdentificationSchemeName1Choice_1/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4
source	<xs:simpleType name="ExternalPersonIdentification1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType>

simpleType **ExternalPurpose1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02

type	restriction of **xs:string**
properties	base xs:string
used by	element **Purpose2Choice/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4
source	<xs:simpleType name="ExternalPurpose1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType>

simpleType **ExternalServiceLevel1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **ServiceLevel8Choice/Cd**
facets	Kind Value Annotation minLength 1 maxLength 4 enumeration SEPA
source	<xs:simpleType name="ExternalServiceLevel1Code"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> <xs:enumeration value="SEPA"/> </xs:restriction> </xs:simpleType>

simpleType **IBAN2007Identifier**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **AccountIdentification4Choice_3/IBAN**
facets	Kind Value Annotation pattern [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
source	<xs:simpleType name="IBAN2007Identifier"> <xs:restriction base="xs:string"> <xs:pattern value="[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}"/> </xs:restriction> </xs:simpleType>

simpleType **IBAN2007Identifier_HR**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **AccountIdentification4Choice_HR/IBAN**
facets	Kind Value Annotation pattern [H][R][0-9]{19}

source	`<xs:simpleType name="IBAN2007Identifier_HR">`
	`  <xs:restriction base="xs:string">`
	`  <xs:pattern value="[H][R][0-9]{19}"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **ISODate**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**xs:date**
properties	base xs:date
used by	elements **DateAndPlaceOfBirth/BirthDt** **MandateRelatedInformation6/DtOfSgntr** **PaymentInstructionInformation4/ReqdColltnDt**

source	`<xs:simpleType name="ISODate">`
	`  <xs:restriction base="xs:date"/>`
	`</xs:simpleType>`

simpleType **ISODateTime**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**xs:dateTime**
properties	base xs:dateTime
used by	element **GroupHeader39/CreDtTm**

source	`<xs:simpleType name="ISODateTime">`
	`  <xs:restriction base="xs:dateTime"/>`
	`</xs:simpleType>`

simpleType **Max1025Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **MandateRelatedInformation6/ElctrncSgntr**
facets	Kind Value Annotation minLength 1 maxLength 1025 pattern \S+.*

source	<xs:simpleType name="Max1025Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="1025"/> <xs:pattern value="\S+.*"/> </xs:restriction> </xs:simpleType>

simpleType **Max140Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	elements **StructuredRemittanceInformation7/AddtlRmtInf** **RemittanceInformation5/Ustrd**
facets	Kind Value Annotation minLength 1 maxLength 140 pattern \S+.*
source	<xs:simpleType name="Max140Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="140"/> <xs:pattern value="\S+.*"/> </xs:restriction> </xs:simpleType>

simpleType **Max15NumericText**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	elements **GroupHeader39/NbOfTxs** **PaymentInstructionInformation4/NbOfTxs**
facets	Kind Value Annotation pattern [0-9]{1,15}
source	<xs:simpleType name="Max15NumericText"> <xs:restriction base="xs:string"> <xs:pattern value="[0-9]{1,15}"/> </xs:restriction> </xs:simpleType>

simpleType **Max34Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **GenericAccountIdentification1/Id**

facets	Kind / Value / Annotation minLength 1 maxLength 34 pattern \S+.*
source	<xs:simpleType name="Max34Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="34"/> <xs:pattern value="\S+.*"/> </xs:restriction> </xs:simpleType>

simpleType **Max35Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	elements **DateAndPlaceOfBirth/CityOfBirth** **PaymentIdentification1/EndToEndId** **GenericFinancialIdentification1_2/Id** **GenericOrganisationIdentification1/Id** **GenericPersonIdentification1_1/Id** **PaymentIdentification1/InstrId** **CreditorReferenceType2/Issr** **GenericOrganisationIdentification1/Issr** **GenericPersonIdentification1_1/Issr** **MandateRelatedInformation6/MndtId** **GroupHeader39/MsgId** **AmendmentInformationDetails6/OrgnlMndtId** **PaymentInstructionInformation4/PmtInfId** **FinancialIdentificationSchemeName1Choice/Prtry** **OrganisationIdentificationSchemeName1Choice/Prtry** **PersonIdentificationSchemeName1Choice_1/Prtry** **DateAndPlaceOfBirth/PrvcOfBirth** **CreditorReferenceInformation2/Ref**
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern \S+.*
source	<xs:simpleType name="Max35Text"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> <xs:pattern value="\S+.*"/> </xs:restriction> </xs:simpleType>

simpleType **Max35Text_CI**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **GenericPersonIdentification1_2/Id**
facets	Kind / Value / Annotation minLength 1 maxLength 35 pattern [A-Z]{2}[0-9]{2}[a-zA-Z0-9]{4,31}
source	<xs:simpleType name="Max35Text_CI">

```
  <xs:restriction base="xs:string">
    <xs:minLength value="1"/>
    <xs:maxLength value="35"/>
    <xs:pattern value="[A-Z]{2}[0-9]{2}[a-zA-Z0-9]{4,31}"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **Max35Text_NP**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **GenericFinancialIdentification1_1/Id**
facets	Kind / Value / Annotation minLength 1 maxLength 35 enumeration NOTPROVIDED

source	`<xs:simpleType name="Max35Text_NP">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  <xs:enumeration value="NOTPROVIDED"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **Max35Text_SEPA**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **PersonIdentificationSchemeName1Choice_2/Prtry**
facets	Kind / Value / Annotation minLength 1 maxLength 35 enumeration SEPA

source	`<xs:simpleType name="Max35Text_SEPA">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  <xs:enumeration value="SEPA"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **Max70Text**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**

properties	base xs:string
used by	elements **PostalAddress6/AdrLine** **PartyIdentification32_1/Nm** **PartyIdentification32_2/Nm** **PartyIdentification32_3/Nm** **PartyIdentification32_5/Nm** **PartyIdentification32_6/Nm**
facets	Kind Value Annotation minLength 1 maxLength 70 pattern \S+.*

source	`<xs:simpleType name="Max70Text">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="70"/>`
	`  <xs:pattern value="\S+.*"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **PaymentMethod2Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **PaymentInstructionInformation4/PmtMtd**
facets	Kind Value Annotation enumeration DD

source	`<xs:simpleType name="PaymentMethod2Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="DD"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **SequenceType1Code**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	restriction of **xs:string**
properties	base xs:string
used by	element **PaymentTypeInformation20/SeqTp**
facets	Kind Value Annotation enumeration FRST enumeration RCUR enumeration FNAL enumeration OOFF

source	`<xs:simpleType name="SequenceType1Code">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="FRST"/>`
	`  <xs:enumeration value="RCUR"/>`
	`  <xs:enumeration value="FNAL"/>`
	`  <xs:enumeration value="OOFF"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **TrueFalseIndicator**

namespace	urn:iso:std:iso:20022:tech:xsd:sddhr:pain.008.001.02
type	**xs:boolean**
properties	base xs:boolean
used by	element **MandateRelatedInformation6/AmdmntInd**
source	<xs:simpleType name="TrueFalseIndicator"> <xs:restriction base="xs:boolean"/> </xs:simpleType>

XML Schema documentation generated by **XMLSpy** Schema Editor **http://www.altova.com/xmlspy**